

Surface Mount Bandpass Filter

BPF-C70+

50Ω 69.5 to 70.5 MHz



Generic photo used for illustration purposes only
CASE STYLE: HU1186

The Big Deal

- Narrow bandwidth of 1.43% fractional BW
- High rejection of 50 dB min. from 80-1000 MHz
- Good VSWR 1.3:1 typical in passband
- Miniature shielded package

Product Overview

The BPF-C70+ is a narrow band bandpass filter in a shield package (size of 0.87" x 0.80" x 0.25") fabricated using SMT technology. It has more than 50 dB rejection up to 1000 MHz. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability.

Key Features

Feature	Advantages
Narrow bandwidth of (1.43 % fractional BW)	Narrow bandwidth helps in adjacent channel rejection and increased selectivity.
High rejection, 50dB Min. from 80-1000MHz	Achieving 50 dB rejection over 80-1000 MHz, this design provides good performance in rejecting harmonics and sub harmonics.
Shielded case	Reduced interference with the surrounding components.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Bandpass Filter

50Ω 69.5 to 70.5 MHz

BPF-C70+



Generic photo used for illustration purposes only
CASE STYLE: HU1186

Features

- Good VSWR, 1.3:1 typical in passband
- Sharp insertion roll-off
- Aqueous washable
- Miniature shield package

Applications

- Military hi-rel systems
- High rejection application
- Image rejection
- IF signal processing

Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	70	—	MHz
	Insertion Loss	F1-F2	69.5-70.5	6.4	8	dB
	VSWR	F1-F2	69.5-70.5	1.3	1.7	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-66	20	28	dB
	VSWR	DC-F3	DC-66	—	9	:1
Stop Band, Upper	Insertion Loss	F4-F5	75-1000	20	31	dB
	VSWR	F4-F5	75-1000	—	8	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	80 mW max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

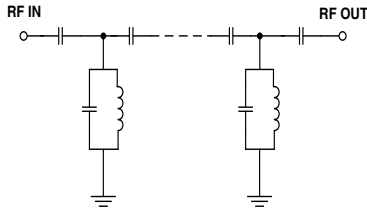

Typical Frequency Response







Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	95.83	2471.84	69.50	243.53
10.0	91.61	1844.81	69.60	241.18
50.0	84.69	500.90	69.70	238.75
60.0	65.44	114.85	69.80	236.98
66.0	32.23	15.29	69.90	234.99
67.5	14.99	3.91	70.00	233.43
69.5	6.28	1.25	70.10	232.43
70.0	6.07	1.17	70.20	231.60
70.5	6.05	1.12	70.30	230.98
73.0	13.22	2.33	70.40	230.68
75.0	31.62	9.45	70.50	229.83
80.0	59.41	42.67	70.60	230.17
100.0	80.41	229.35	70.70	230.71
260.0	76.89	195.95	70.80	231.03
400.0	69.51	125.98	70.90	231.67
500.0	65.13	148.72	71.00	233.54
750.0	60.37	106.87	71.50	241.81
800.0	59.92	103.36	72.00	257.29
900.0	58.25	96.53	72.50	260.49
1000.0	54.88	88.22	73.00	233.19

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

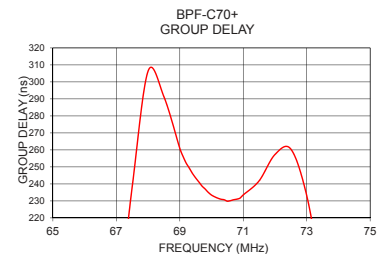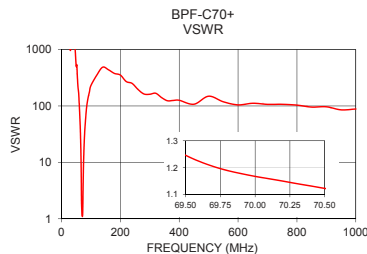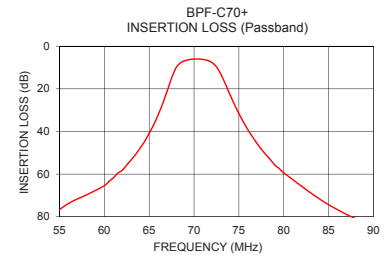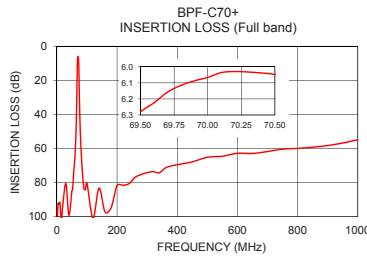

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Pad Connections

INPUT	2
OUTPUT	9
NOT CONNECTED	6 & 13
GROUND	1,3,4,5,7,8,10,11,12,14

Demo Board MCL P/N: TB-500+
Suggested PCB Layout (PL-294)

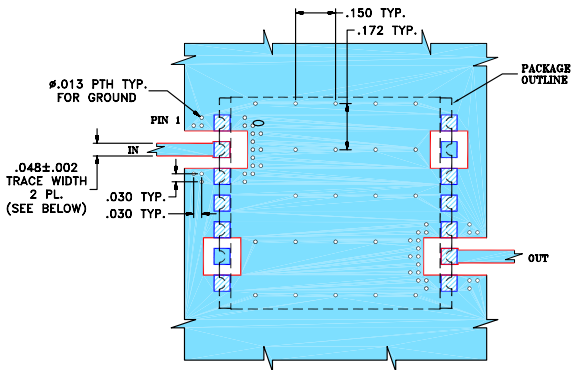


NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS R04850B, DIELECTRIC THICKNESS: $.030 \pm .002$; COPPER: 1/2 OZ ON EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Outline Drawing

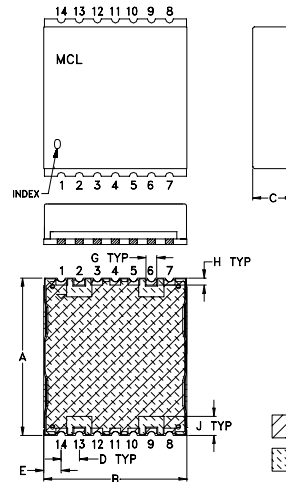


Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H
.870	.800	.25	.100	.097	--	.060	.040
22.10	20.32	6.35	2.54	2.46	--	1.52	1.02
J	K	L	M	N	P		wt
.105	.910	--	.060	.060	--		grams
2.67	23.11	--	1.52	1.52	--		2.85

Note: Please refer to case style drawing for details

PCB Land Pattern



Suggested Layout,
 Tolerance to be within $\pm .002$

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

