



Specifications

Electrical Ratings	50mA @ 50VDC	Dielectric Strength	250Vrms min
Electrical Life	100,000 cycles typical	Insulation Resistance	≥ 100MΩ min
Contact Resistance	≤ 50mΩ initial	Operating Temperature	-40°C to +85°C
Actuation Force	180gF ± 50gF	Storage Temperature	-40°C to +85°C
Actuation Travel	.25 ± 0.1mm		


Materials

Actuator	PA6T Nylon
Housing	LCP
Cover	Stainless Steel
Contacts	Stainless Steel, Silver Plated
Terminals	Brass, Silver Plated

Ordering Information

1. Series	CS1211
CS1211	

Dimensions

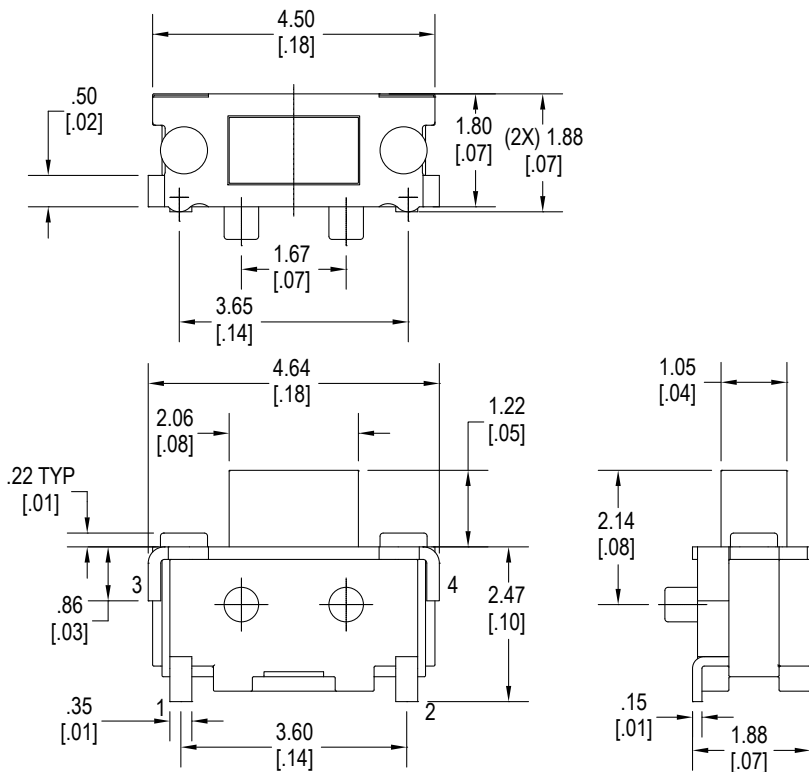

Schematic & PC Layout

