


Bias supply DC-DC

KIT_6W_18V_P7_950V

Auxiliary supply solution featuring off-line SMPS current mode controller IC with 950 V CoolMOS™ P7 SJ MOSFET

Description

KIT_6W_18V_P7_950V

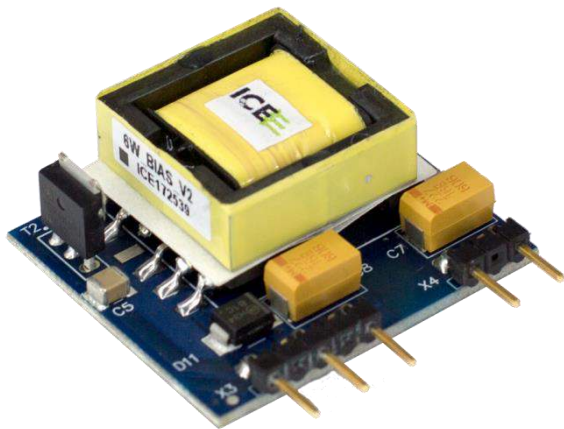

Ordering code:
KIT_6W_18V_P7_950V

Board components

- › CoolSET™ 5th gen. stand-alone controller ([ICE5QSAG](#))
- › 950 V CoolMOS™ P7 SJ MOSFET ([IPU95R3K7P7](#))

Board specifications

- › Input voltage: 90 V_{DC} - 440 V_{DC}
- › Output voltage: 18 V_{DC} (prim. + sec. side)
- › Output power max.: 6 W (prim. + sec. side)

Technical Parameter

KIT_6W_18V_P7_950V



Summary of features

- Quasi-resonant flyback using a Infineon's fifth generation controller
- Snubberless operation to improve efficiency
- 950 V breakdown voltage allows operating off of higher input voltages
- Primary side regulated 18 V and a secondary side unregulated 18 V output

In power supplies that are used for server, telecom, and industrial applications there is typically a small bias power supply in addition to the main power converter. This 6 W bias board is designed to run in a system where it is continuously powered from the 400VDC output of a boost power factor correction (PFC) converter and provides power to the fan, gate drivers, and controller. This board uses the ICE5QSAG quasi-resonant (QR) flyback controller and the new 950 V CoolMOS™ P7 (IPU95R3K7P7). This 950 V breakdown voltage gives additional margin in the system to ensure the bias continues to run through surge events. This design was done as a snubberless flyback converter to further improve the efficiency over the entire load range.

| Description | Value |
|--|-------|
| Max. Efficiency [%] | 85 |
| Max. Efficiency [%] @ Output Current [A] | 0.35 |
| Max. Efficiency [%] @ Input Voltage [V] | 400 |
| Nom. Efficiency [%] | 85 |
| Efficiency @ 10% load [%] | 50 |
| Efficiency @ 50% load [%] | 85 |
| Efficiency @ 100% load [%] | 85 |
| Switching frequency min [kHz] | 25 |
| Switching frequency max [kHz] | 60 |
| Input Voltage Type | DC |
| Input Voltage min [V] | 90 |
| Input Voltage nom [V] | 380 |
| Input Voltage max [V] | 440 |

ICE5QSAG

Description:

- › Infineon latest 5th generation quasi-resonant flyback PWM controller offers high performance and comprehensive suite of protection to increase system robustness.

Summary of Features:

- › Novel quasi-resonant switching scheme
- › Rapid and adjustable start-up with cascode configuration
- › 2 level selectable active burst mode level
- › Built-in digital soft-start
- › Cycle by cycle peak current limitation
- › Digital frequency reduction with decreasing load for higher efficiency
- › Adjustable line input over-voltage and brown IN/OUT protection
- › V_{CC} and CS pin short to ground protection
- › OLP, output short, output over-voltage, OTP with hysteresis and V_{CC} over/under voltage protection
- › Auto-restart for all protection features



Benefits:

- › High efficiency with latest CoolMOS™ P7 SJ MOSFET family and quasi-resonant switching scheme
- › Auto-restart recovery scheme to minimize interruption to system operation
- › Extensive protection coverage to increase system robustness
- › Rapid start-up performance with cascode configuration


IPU95R3K7P7

Description:

- › Designed to meet the growing consumer needs in the high voltage MOSFETs arena, the latest 950 V CoolMOS™ P7 technology focuses on the low-power SMPS market.


Summary of Features:

- › Offering 50V more blocking voltage than its predecessor 900V CoolMOS™ C3, the 950V CoolMOS™ P7 series delivers outstanding performance in terms of efficiency, thermal behavior and ease-of-use. As the all other P7 family members, the 950V CoolMOS™ P7 series comes with an integrated Zener diode ESD protection. The integrated diode considerably improves ESD robustness, thus reducing ESD-related yield loss and reaching exceptional ease-of-use levels. CoolMOS™ P7 is developed with best-in-class VGS(th) of 3V and a narrow tolerance of only $\pm 0.5V$, which makes it easy to drive and design-in.

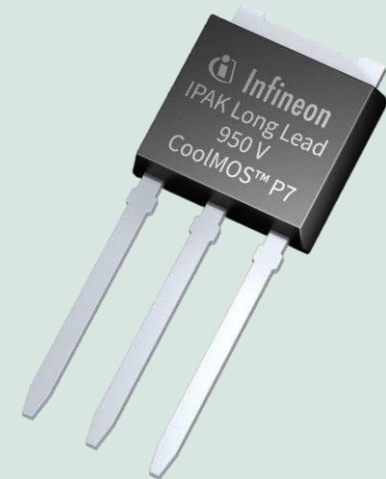

Schematic

KIT_6W_18V_P7_950V

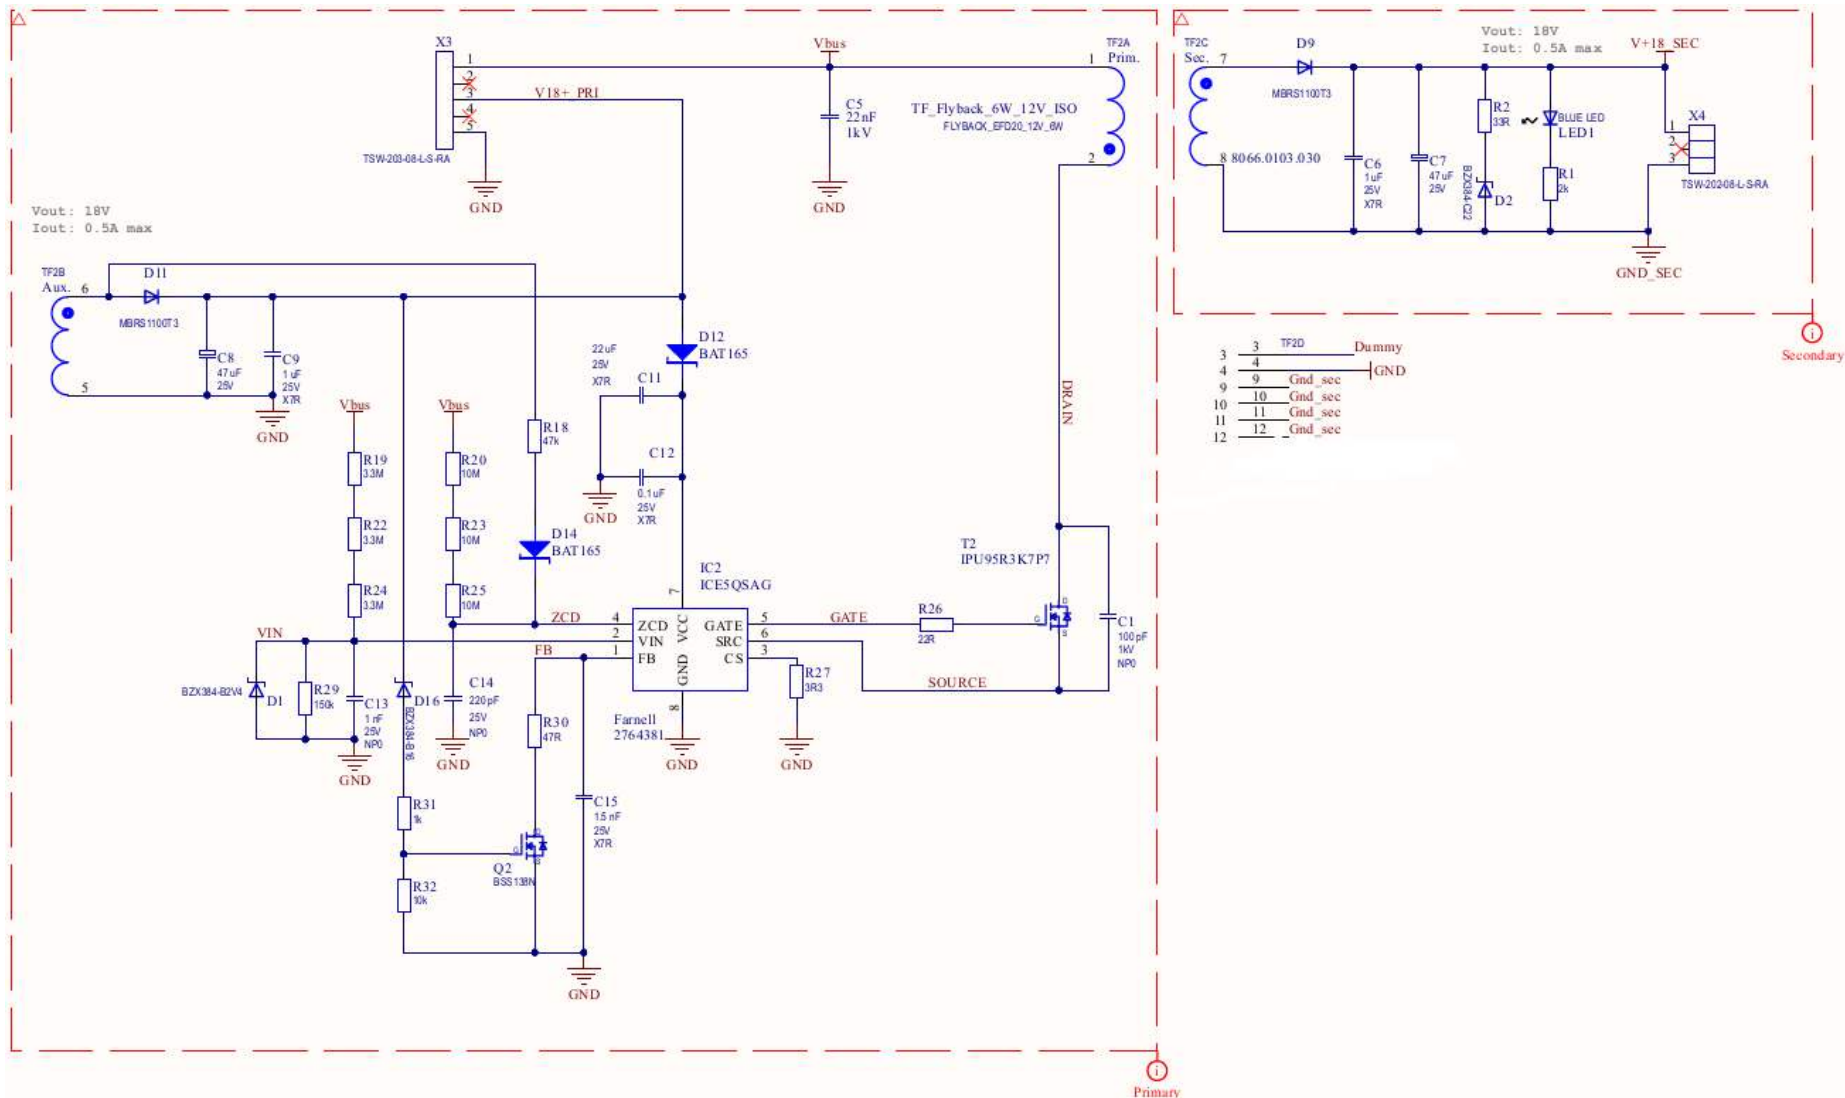


Transformer

KIT_6W_18V_P7_950V

| AVV. Wind. | CONDUTTORE Wire | Nr. SPIRE Nr. of turns | R P t g z | PIN DI USCITA Pin output | SPIRE STRATO Turns per layer | Nr. STRATI Nr. of layers | NOTE Remarks |
|-------------------------|-----------------------|------------------------|-----------|--|------------------------------|--------------------------|---|
| N1 | Filo rame Ø0,15 Rif.4 | 0 65 | + | 2 3 | 56 | 2 | ESEGUIRE 1 GIRO DI SPONDIRA H=3MM RIF.9 LATO 7-12 Execute 1 turn of tape h=3mm ref.9 side 7-12 |
| ISOLAMENTO: Insulation: | | 2 | | GIRI DI NASTRO ADESIVO POLIESTERE RIF. turns of polyester adhesive tape Ref. | | 7 | |
| N2 | TEX-E050 Rif.5 | 0 10 | + | 7 8 | 10 | 1 | ATTRAVERSAMENTO A 90° SU NASTRO LATERALMENTE Perpendicular crossing on tape |
| ISOLAMENTO: Insulation: | | 2 | | GIRI DI NASTRO ADESIVO POLIESTERE RIF. turns of polyester adhesive tape Ref. | | 7 | |
| N3 | Filo rame Ø0,50 Rif.6 | 0 10 | + | 6 5 | 10 | 1 | LASCIARE 3MM LATO 7-12 ATTRAVERSAMENTO A 90° SU NASTRO LATERALMENTE Leave 3mm side 7-12. Perpendicular crossing on tape |
| ISOLAMENTO: Insulation: | | 2 | | GIRI DI NASTRO ADESIVO POLIESTERE RIF. turns of polyester adhesive tape Ref. | | 7 | |
| N4 | Filo rame Ø0,15 Rif.4 | 0 65 | + | 3 1 | 46 | 2 | ESEGUIRE 1 GIRO DI SPONDIRA H=3MM RIF.9 LATO 7-12 E 1 GIRO DI SPONDIRA H=1MM RIF.8 LATO 1-6 Execute 1 turn of tape H=3mm ref.9 side 7-12 and 1 turn of tape H=1mm ref.8 side 1-6 |
| ISOLAMENTO: Insulation: | | 2 | | GIRI DI NASTRO ADESIVO POLIESTERE RIF. turns of polyester adhesive tape Ref. | | 7 | |


| MONTAGGIO – Assembling | | |
|---|--|---------------------------------|
| <p>APPLICARE NR.2 PIASTRINI ISOLANTI RIF.11 Apply nr.2 spacers ref.11</p> | <p>ASSEMBLARE I SEMINUCLEI MEDIANTE 2 GIRI DI NASTRO RIF.10 Fix the halfcores with 2 turns of tape ref.10</p> | |
| <p>POSIZIONAMENTO ROCCHETTO Positioning of the coilformer</p> | <p>BLOCCARE NUCLEO/NUCLEO E ROCCHETTO/NUCLEO MEDIANTE RIF.15+16 Fix core/core and coil/core with ref.15+16</p> | |
| <p>SCHEMA ELETTRICO Electrical diagram</p> | <p>2011/65/UE (RoHS-2) Compliant</p> <p>DIMENSIONI IN MILLIMETRI Dimensions in millimeters</p> | |
| COLLAUDO ELETTRICO – Electrical checking | | |
| TIPO DI PROVA – Test | CONDIZIONI DI PROVA – Test Conditions | LIMITI – Limits |
| INDUTTANZA Inductance | 2-1 @ 10 kHz – 100 mV | 4.25 ± 5.75 mH |
| RAPPORTO SPIRE Turns ratio | TRA TUTTI GLI AVV. @ 10kHz – 100mV Between all windings | < 1 SPIRA Turn |
| RIGIDITA' DIELETTRICA Dielectric strength | 2+1+6+5/7+8 @ 4200 V – 50 Hz – 2 sec. | SUPERARE LA PROVA pass the test |
| RIGIDITA' DIELETTRICA Dielectric strength | 2+1/6+5 @ 300 V – 50 Hz – 2 sec. | SUPERARE LA PROVA pass the test |
| INDUTTANZA DISPERSA Leakage inductance | 2-1 @ 10 kHz – 100 mV – 5+6+7+8 c.c. | < 40 µH |
| <p>Mod. AQ 05.09</p> <p>TRANSFORMERS</p> | | |
| DESCRIZIONE-Description | Transformer EFD20 SMD (6W_BIAS_V2) | |
| DOCUMENTO-Document | CODICE-Part Number | REV.-Revision |
| P.F. | 8066.0103.030 | 01 |
| | DATA EMISSIONE-Release date | PAG.-Page |
| | 30.06.17 | 1/1 |

Base board KIT_6W_18V_P7_950V

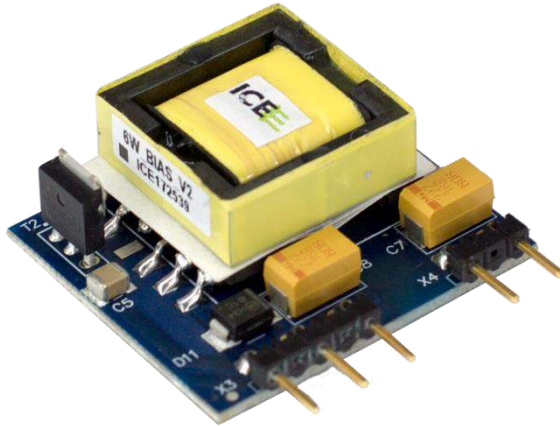

Ordering code:
KIT_6W_18V_P7_950V

Auxiliary supply solution featuring off-line SMPS current mode controller IC with an 950 V CoolMOS™ SJ MOSFET

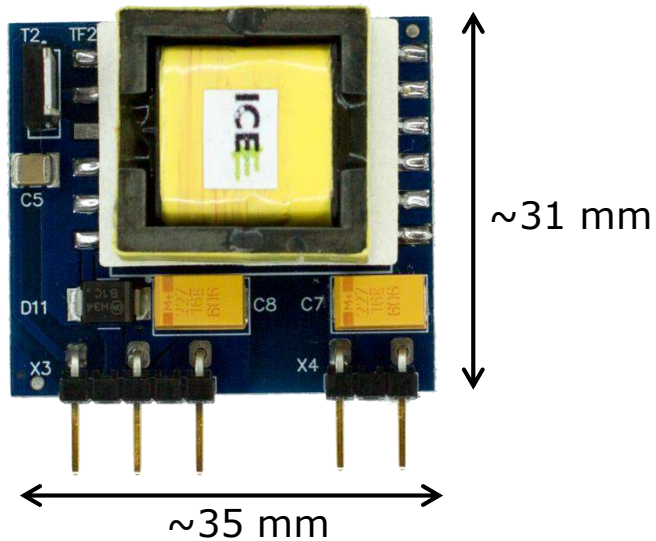



Technical Material

- > Application Notes
- > Simulation Models
- > Datasheets
- > PCB Design Data

> www.infineon.com/kit-6w-18v-p7-950v

Evaluation Boards

- > Evaluation Boards
- > Demoboards
- > Reference Designs


> www.infineon.com/evaluationboards

Videos

- > Technical Videos
- > Product Information Videos

> www.infineon.com/mediacenter

Support Online tools and services

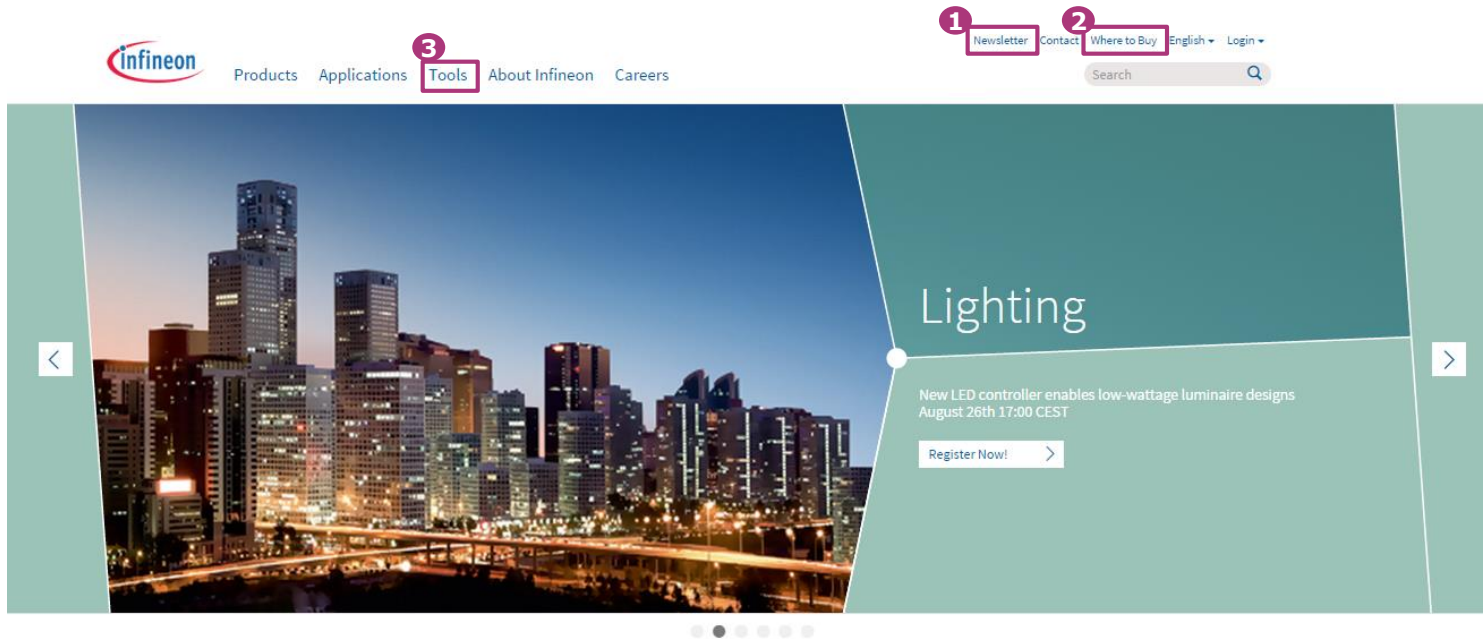

- 1 **Subscribe to Newsletter**
- 2 **Where to Buy**
- 3 **Tools, Finders and Selectors**
- 4 **Support**

- Products
- Applications
- Tools
- 4 **Support**
- Technology

- Power
- Automotive System IC
- ESD & EMI
- Microcontroller
- RF & Wireless Control
- Security IC
- Sensor
- Smart Card IC
- Interface
- Transistor & Diode

- Power Overview
- Power MOSFET
- IGBT
- Smart Low-Side & High-Side Switches
- Linear Voltage Regulator
- DC-DC Converter
- LED Driver | Lighting ICs
- Silicon Carbide (SiC)
- High Power Thyristors & Diodes
- Motor Control & Gate Driver
- AC-DC Supply

News & Tweets



Part of your life. Part of tomorrow.

