



# *SAW Components*

*Data Sheet B3559*

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are rendered in a bold, sans-serif font, appearing to be part of a curved, metallic-looking structure. The background is dark and textured, suggesting a globe or a complex circuit board layout.



**SAW Components**

**B3559**

**Low-loss Filter**

**345,00 MHz**

**Data Sheet**


Ceramic package **QCC8C**

**Features**

- RF low-loss filter for remote control receivers
- Package for **Surface Mounted Technology (SMT)**
- Balanced and unbalanced operation possible

**Terminals**


- Ni, gold plated

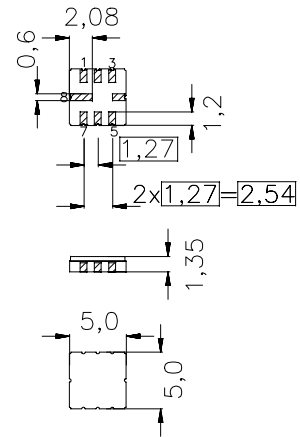

typ. dimensions in mm, approx. weight 0,1 g

**Pin configuration**

- 1 Input Ground
- 2 Input
- 5 Output
- 6 Output Ground
- 4,8 Case - Ground
- 3,7 to be grounded



Type	Ordering code	Marking and package according to	Packing according to
B3559	B39351-B3559-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T_A$	-45/+90	°C	source impedance 50 $\Omega$
Storage temperature range	$T_{stg}$	-45/+90	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_S$	0	dBm	



Data Sheet

Characteristics

Reference temperature:  $T_A = 25\text{ °C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$  and matching network  
 Terminating load impedance:  $Z_L = 50\ \Omega$  and matching network

		min.	typ.	max.	
<b>Center frequency</b> (center frequency between 3 dB points)	$f_C$	—	345,03	—	MHz
<b>Minimum insertion attenuation</b> 344,90 ... 345,10 MHz	$\alpha_{min}$	—	2,0	3,0	dB
<b>Pass band</b> (relative to $\alpha_{min}$ )					
344,94 ... 345,13 MHz		—	0,8	2,0	dB
344,90 ... 345,17 MHz		—	1,0	3,0	dB
344,87 ... 345,20 MHz		—	1,5	6,0	dB
<b>Relative attenuation</b> (relative to $\alpha_{min}$ )	$\alpha_{rel}$				
10,00 ... 300,00 MHz		45	50	—	dB
300,00 ... 341,00 MHz		40	45	—	dB
341,00 ... 344,00 MHz		15	20	—	dB
346,10 ... 347,00 MHz		10	15	—	dB
347,00 ... 350,00 MHz		20	25	—	dB
350,00 ... 450,00 MHz		35	40	—	dB
450,00 ... 1000,00 MHz		45	50	—	dB
<b>Impedance</b> for pass band matching					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	350 $\parallel$ 2,80	—	$\Omega \parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	350 $\parallel$ 2,80	—	$\Omega \parallel$ pF
<b>Temperature coefficient of frequency</b> <sup>1)</sup>	$TC_f$	—	-0,03	—	ppm/K <sup>2</sup>
<b>Frequency inversion point</b>	$T_0$	10	—	30	°C

<sup>1)</sup>Temperature dependence of  $f_C$ :  $f_C(T_A) = f_C(T_0) (1 + TC_f(T_A - T_0)^2)$



**SAW Components**

**B3559**

**Low-loss Filter**

**345,00 MHz**

**Data Sheet**

**Characteristics**


Reference temperature:  $T_A = -45 \dots 90 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50 \text{ } \Omega$  and matching network  
 Terminating load impedance:  $Z_L = 50 \text{ } \Omega$  and matching network

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Center frequency</b> (center frequency between 3 dB points)	$f_c$	—	345,00	—	MHz
<b>Minimum insertion attenuation</b> 344,90 ... 345,10 MHz	$\alpha_{\min}$	—	2,0	3,5	dB
<b>Pass band</b> (relative to $\alpha_{\min}$ )					
344,94 ... 345,06 MHz		—	0,8	2,0	dB
344,90 ... 345,10 MHz		—	1,0	3,0	dB
344,87 ... 345,13 MHz		—	1,5	6,0	dB
<b>Relative attenuation</b> (relative to $\alpha_{\min}$ )	$\alpha_{\text{rel}}$				
10,00 ... 300,00 MHz		45	50	—	dB
300,00 ... 341,00 MHz		40	45	—	dB
341,00 ... 343,93 MHz		15	20	—	dB
346,10 ... 347,00 MHz		10	15	—	dB
347,00 ... 350,00 MHz		20	25	—	dB
350,00 ... 450,00 MHz		35	40	—	dB
450,00 ... 1000,00 MHz		45	50	—	dB
<b>Impedance</b> for pass band matching					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	350    2,80	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	350    2,80	—	$\Omega \parallel \text{pF}$



Data Sheet

Matching network to 50 Ω (element values depend on pcb layout and equivalent circuit)

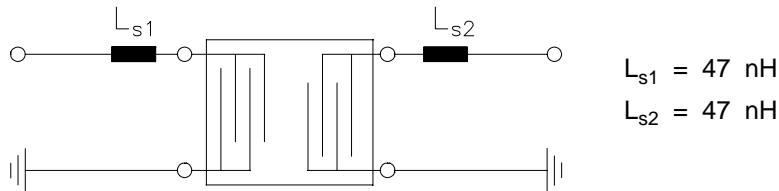


Minimising the crosstalk

For a good ultimate rejection a low crosstalk is necessary. Low crosstalk can be realised with a good RF layout. The major crosstalk mechanism is caused by the “ground-loop” problem.

Grounding loops are created if input-and output transducer GND are connected on the top-side of the PCB and fed to the system grounding plane by a common via hole. To avoid the common ground path, the ground pin of the input- and output transducer are fed to the system ground plane (bottom PCB plane) by their own via hole. The transducers' grounding pins should be isolated from the upper grounding plane.

A common GND inductivity of 0.5nH degrades the ultimate rejection (crosstalk) by 20dB.

The optimised PCB layout, including matching network for transformation to 50 Ohm, is shown here. In this PCB layout the grounding loops are minimised to realise good ultimate rejection.



Optimised PCB layout for SAW filters in QCC8C package, pinning 2,5 (top side, scale 1:1)


The bottom side is a copper plane (system ground area). The input and output grounding pins are isolated and connected to the common ground by separated via holes.

For good contact of the upper grounding area with the lower side it is necessary to place enough via holes.




Data Sheet

Normalized frequency response

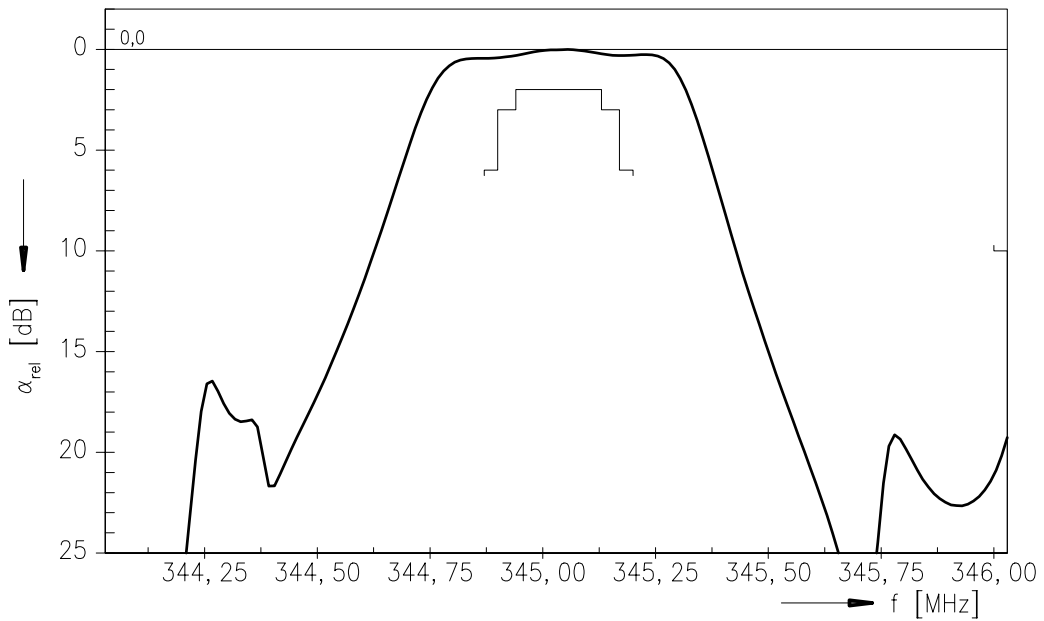

Normalized frequency response (wideband)

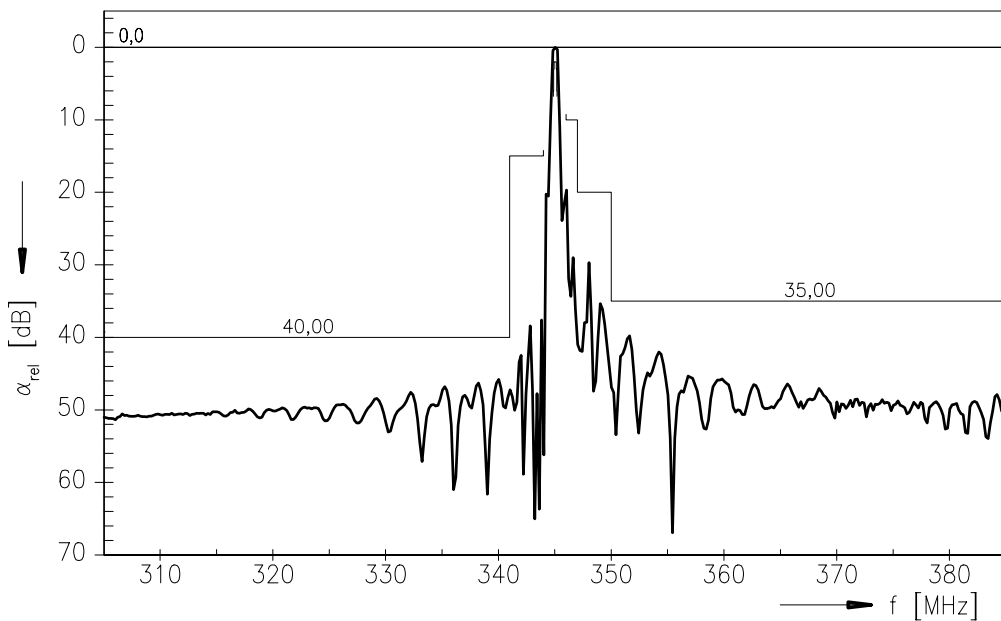



**SAW Components**

**B3559**

**Low-loss Filter**

**345,00 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE AE PD**

**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 2001. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.