



# EVHR1203-Y-00A

## 240W General-Purpose Evaluation Board

### DESCRIPTION

The EVHR1203-Y-00A is a general-purpose evaluation board for the HR1203 for 240W PC and ATX power, adapters, all-in-one or gaming power, and general AC/DC power supply applications.

The HR1203 integrates a digital PFC controller and a half-bridge resonant controller into a single chip. It uses very low power at no load or ultra-light load, making it compliant with Energy Using Product Directive (EuP) Lot 6 and Code of Conduct Version 5 Tier 2 specifications.

The PFC of the HR1203 employs a patented average current control scheme, which can operate in continuous conduction mode (CCM) and discontinuous conduction mode (DCM), according to the instantaneous condition of the input voltage and output load. The IC exhibits excellent efficiency and a high power factor (PF) at light load.

The half-bridge LLC converter achieves high efficiency with zero-voltage switching (ZVS). The HR1203 implements an adaptive dead-time adjustment (ADTA) function so the LLC converter can easily achieve ZVS from heavy load to light load. Additionally, the HR1203 can prevent the LLC converter from operating in capacitive mode, making it more robust and easier to design.

Typically, the EVHR1203-Y-00A is designed for PC and ATX power, adapters, and gaming power applications with a 12V, 20A constant voltage output and 240W rated power from 90V<sub>AC</sub> to 265V<sub>AC</sub> and 50Hz/60Hz.

The EVHR1203-Y-00A has excellent efficiency and a high power factor for the entire load range. Full protection features include overload protection, short-circuit protection (SCP), over-voltage protection (OVP), and anti-capacitive mode protection. The EVHR1203-Y-00A also meets the Class C standard of IEC61000-3-2 and the EN55022 standard.

### ELECTRICAL SPECIFICATIONS

| Parameter        | Symbol             | Value     | Units |
|------------------|--------------------|-----------|-------|
| Input AC voltage | V <sub>IN_AC</sub> | 90 to 265 | V     |
| Output current   | I <sub>OUT</sub>   | 20        | A     |
| Output voltage   | V <sub>OUT</sub>   | 12        | V     |
| Output power     | P <sub>OUT</sub>   | 240       | W     |

### FEATURES

- Wide Operating Input Range (from 90V to 265V)
- 240W Rated Power and Constant Voltage Output
- High Efficiency Up to 93%
- Meets EuP Lot 6 and COC Version 5 Tier 2 Specifications
- Meets Class C Standard of IEC61000-3-2
- Meets EN55022 Standard
- Meets EN61000-4-5 Level 4 for Surge Immunity (4kV)
- High Power Factor (PF)
- Overload Protection (Auto-Restart Mode)
- Short-Circuit Protection (SCP) (Auto-Restart Mode)
- Over-Voltage Protection (OVP)
- Anti-Capacitive Mode Protection

### APPLICATIONS

- PC and ATX Power
- Adapters
- All-in-One or Gaming Power Supplies
- General AC/DC Power Supply



All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.



High Voltage

**Warning:** Although this board is designed to satisfy safety requirements, the engineering prototype has not been agency approved. Therefore, all testing should be performed using an isolation transformer to provide AC input to the prototype board.


EVHR1203-Y-00A EVALUATION BOARD

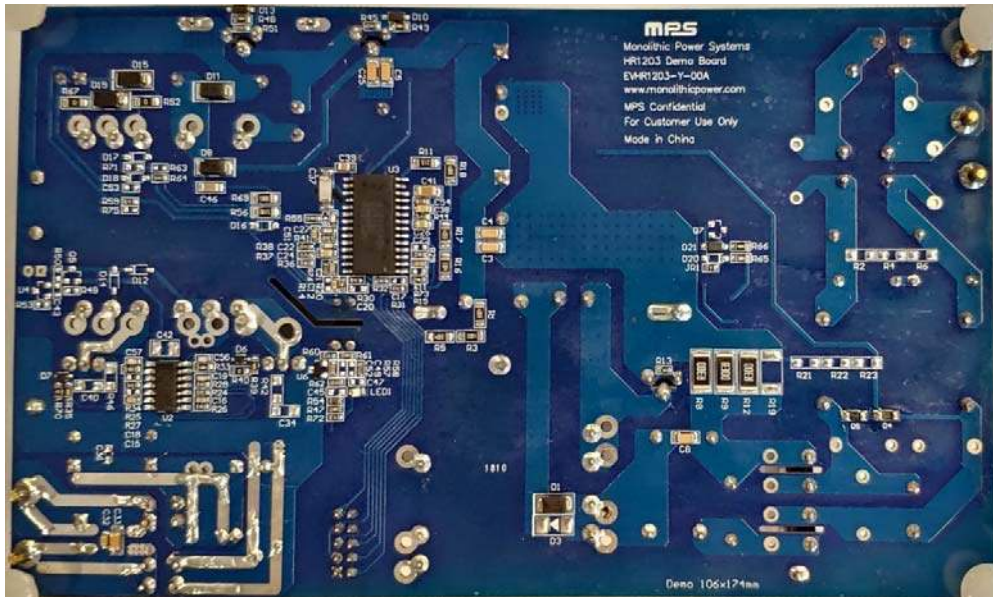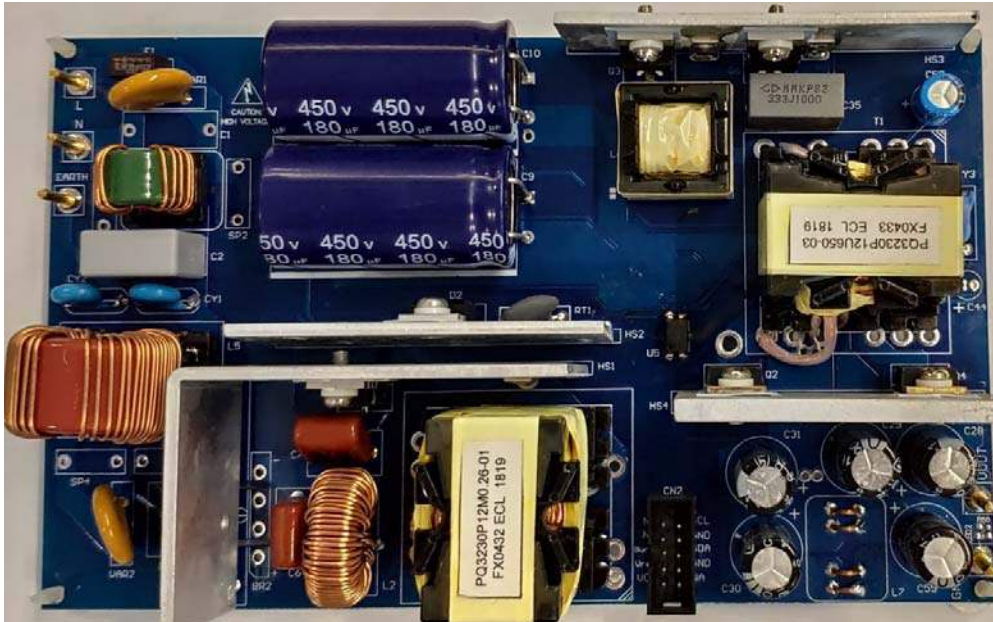

(LxWxH) (17.4cmx10.55cmx3.5cm)

| Board Number   | MPS IC Number |
|----------------|---------------|
| EVHR1203-Y-00A | HR1203GY      |
|                | MP6922DS      |

EVALUATION BOARD SCHEMATIC

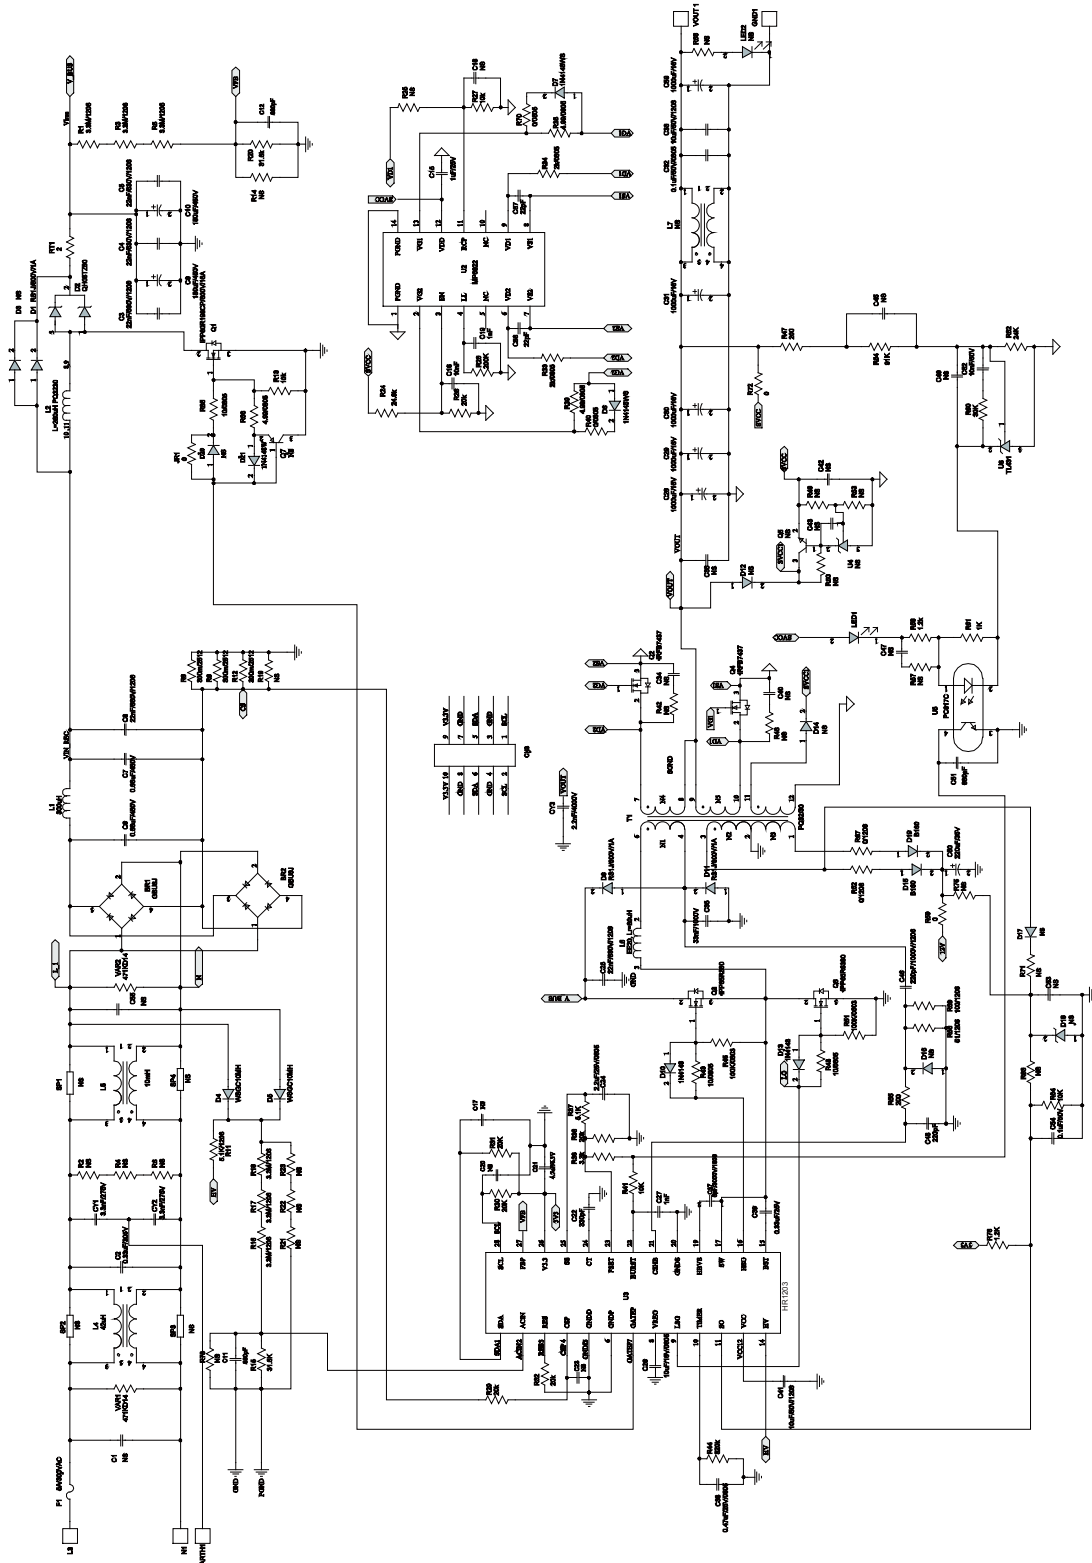

**EVHR1203-Y-00A BILL OF MATERIALS**

| Qty | Ref                           | Value  | Description                      | Package | Manufacturer | Manufacturer P/N      |
|-----|-------------------------------|--------|----------------------------------|---------|--------------|-----------------------|
| 2   | CY1, CY2                      | 3.3nF  | Y capacitor, 2600V, 20%          | DIP     | HongKe       | JYK10F332MY72N        |
| 1   | CY3                           | 2.2nF  | Y capacitor, 4000V, 20%          | DIP     | HongKe       | JNK12E222MY02N        |
| 5   | C28, C29,<br>C30, C31,<br>C59 | 1000µF | Electrolytic capacitor, 16V      | DIP     | JIANGHAI     | C287-16V1000          |
| 1   | C2                            | 0.33µF | X-capacitor, 310V                | DIP     | VISHAY       | BFC233920334          |
| 2   | C6, C7                        | 0.68µF | Capacitor, 450V, CBB             | DIP     | CARLI        | TF684K2Y10BL270D9R    |
| 5   | C3, C4,<br>C5, C8,<br>C25     | 22nF   | Ceramic capacitor, 630V,<br>X7R  | 1206    | TDK          |                       |
| 1   | C15                           | 1µF    | Ceramic capacitor, 25V,<br>X7R   | 0603    | Murata       | GRM188R71E105KA12D    |
| 2   | C9, C10                       | 180µF  | Electrolytic capacitor,<br>450V  | DIP     | JIANGHAI     | CD263-450V180         |
| 3   | C11, C12,<br>C51              | 680pF  | Ceramic capacitor,<br>50V, X7R   | 0603    | Murata       | GRM188R71H681KA01D    |
| 2   | C19, C27                      | 1nF    | Ceramic capacitor, 50V,<br>X7R   | 0603    | Murata       | GRM188R71H102KA01D    |
| 1   | C54                           | 0.1µF  | Ceramic capacitor, 50V,<br>X7R   | 0603    | Murata       | GRM188R71H104KA93D    |
| 1   | C39                           | 0.33µF | Ceramic capacitor, 50V,<br>X7R   | 0805    | TDK          | C2012X7R1H334K        |
| 1   | C22                           | 330pF  | Ceramic capacitor, 50V,<br>COG   | 0603    | TDK          | C1608COG1H331D        |
| 1   | C48                           | 220pF  | Ceramic capacitor, 50V,<br>COG   | 0603    | Murata       | GMR1885C1H221JA01D    |
| 1   | C37                           | 5pF    | Ceramic capacitor,<br>3000V, NP0 | 1808    | HHEC         | C1808N5R0J302T        |
| 2   | C16, C52                      | 10nF   | Ceramic capacitor, 50V,<br>X7R   | 0603    | Murata       | GRM188R71H103KA01D    |
| 1   | C21                           | 4.7µF  | Ceramic capacitor, 6.3V,<br>X5R  | 0603    | TDK          | C1608X5R0J475K        |
| 1   | C32                           | 0.1µF  | Ceramic capacitor, 50V,<br>X7R   | 0805    | TDK          | C2012X7R1H104K        |
| 1   | C35                           | 33nF   | Capacitor, 1000V                 | DIP     | FaLa         | MMKP82-1000V-333P15JA |
| 1   | C38                           | 0.47µF | Ceramic capacitor, 25V,<br>X7R   | 0805    | Murata       | GMR21BR71E474KA01L    |
| 2   | C33, C41                      | 10µF   | Ceramic capacitor, 50V,<br>X5R   | 1206    | Murata       | GRM31CR61H106KA12L    |
| 1   | C26                           | 10µF   | Ceramic capacitor, 16V,<br>X7R   | 0805    | Murata       | GMR21BR61C106KE15     |
| 1   | C46                           | 220pF  | Ceramic capacitor,<br>1000V, U2J | 1206    | Murata       | GMR31A7U3A221JW31D    |
| 1   | C50                           | 220µF  | Electrolytic capacitor, 35V      | DIP     | JIANGHAI     | CD110-35V220          |
| 1   | C24                           | 2.2µF  | Ceramic capacitor, 25V,<br>X7R   | 0805    | Murata       | GRM21BR71E225KA73L    |



**EVHR1203-Y-00A BILL OF MATERIALS (continued)**

| Qty | Ref                          | Value        | Description                 | Package | Manufacturer | Manufacturer P/N |
|-----|------------------------------|--------------|-----------------------------|---------|--------------|------------------|
| 2   | C56, C57                     | 22pF         | Ceramic capacitor, 50V, COG | 0603    | TDK          | C1608COG1H220J   |
| 3   | R35, R39, R66                | 4.99Ω        | Film resistor, 1%           | 0805    | Yageo        | RC0805FR-074R99L |
| 6   | R26, R29, R30, R31, R32, R36 | 20kΩ         | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-0720KL  |
| 6   | R1, R3, R5, R16, R17, R18    | 3.3MΩ        | Film resistor, 1%           | 1206    | Yageo        | RC1206FR-073M3L  |
| 1   | R11                          | 5.1kΩ        | Film resistor, 1%           | 1206    | Yageo        | RC1206FR-075K1L  |
| 2   | R33, R34                     | 4.99kΩ       | Film resistor, 1%           | 0805    | Yageo        | RC0805FR-074K99L |
| 2   | R58, R76                     | 1.2kΩ        | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-071K2L  |
| 3   | R28, R45, R51                | 100kΩ        | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-07100KL |
| 1   | R24                          | 24.9kΩ       | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-0724K9L |
| 3   | R43, R48, R65                | 10Ω          | Film resistor, 1%           | 0805    | Yageo        | RC0805FR-0710RL  |
| 1   | R60                          | 30kΩ         | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-0730KL  |
| 3   | R8, R9, R12                  | 0.3Ω         | Film resistor, 1%           | 2512    | Yageo        | RL2512FK-070R3L  |
| 1   | R37                          | 5.1kΩ        | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-075K1L  |
| 4   | R13, R27, R41, R64           | 10kΩ         | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-0710KL  |
| 2   | R15, R20                     | 31.6kΩ       | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-0731K6L |
| 1   | R44                          | 820kΩ        | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-07820KL |
| 1   | R61                          | 1kΩ          | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-071KL   |
| 2   | R47, R55                     | 200Ω         | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-07200RL |
| 1   | R38                          | 3.3kΩ        | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-073K3L  |
| 2   | R52, R67                     | 0Ω           | Film resistor, 5%           | 1206    | Yageo        | RC1206JR-070RL   |
| 3   | R59, R72, JR1                | 0Ω           | Film resistor, 5%           | 0603    | Yageo        | RC0603JR-070RL   |
| 2   | R40, R70                     | 0Ω           | Film resistor, 5%           | 0805    | Yageo        | RC0805JR-070RL   |
| 1   | R54                          | 91kΩ         | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-0791KL  |
| 1   | R56                          | 51Ω          | Film resistor, 1%           | 1206    | Yageo        | RC1206FR-0751RL  |
| 1   | R69                          | 100Ω         | Film resistor, 1%           | 1206    | Yageo        | RC1206FR-07100RL |
| 1   | R62                          | 24kΩ         | Film resistor, 1%           | 0603    | Yageo        | RC0603FR-0724KL  |
| 1   | RT1                          | 2Ω           | Thermal resistor            | DIP     | Semitec      | 2D2-10           |
| 2   | VAR1, VAR2                   | 471KD<br>14  | MOV                         | DIP     | TKS          | TVR14471KS42Y    |
| 1   | BR1                          | GBU8J        | Bridge rectifier, 600V, 8A  | DIP     | Diodes       | GBU8J            |
| 3   | D1, D8, D11                  | RS1J         | Diode, 600V, 1A             | SMA     | Diodes       | RS1J             |
| 1   | D2                           | QH08T<br>Z60 | Diode, 600V, 8A             | TO-220  | PI           | QH08TZ60         |








**EVHR1203-Y-00A BILL OF MATERIALS (continued)**

| Qty | Ref                          | Value                 | Description   | Package | Manufacturer              | Manufacturer P/N      |
|-----|------------------------------|-----------------------|---|---------|---------------------------|-----------------------|
| 2   | D4, D5                       | WSGC10MH              | Diode, 1000V, 1A  | 1206    | ZOWIE                     | WSGC10MH              |
| 2   | D6, D7                       | 1N4148WS              | Diode, 75V, 0.15A   | SOD-323 | Diodes                    | 1N4148WS              |
| 3   | D10, D13,<br>D21             | 1N4148W               | Diode, 75V, 0.15A   | SOD-123 | Diodes                    | 1N4148W               |
| 2   | D15, D19                     | B160                  | Schottky diode, 60V, 1A   | SMA     | Diodes                    | B160                  |
| 1   | F1                           | 5A/300VAC             | FUSE-SS-5H  | DIP     | COOPER<br>BUSSMANN        | SS-5H-5A              |
| 1   | L4                           | 42 $\mu$ H            | Common choke, 42 $\mu$ H,<br>6.5A   | DIP     | Würth                     | 744842742             |
| 1   | L1                           | 300 $\mu$ H           | Filter inductor, 300 $\mu$ H, 3A  | DIP     | Würth                     | 7447065               |
| 1   | L5                           | 10mH                  | Common choke, 10mH,<br>5A   | DIP     | Würth                     | 744825510             |
| 1   | L2                           | 260 $\mu$ H           | PFC inductor, L = 260 $\mu$ H,<br>PQ3230  | DIP     | Emei                      | FX0432                |
| 1   | L6                           | 80 $\mu$ H            | Resonant inductor, EE20   | DIP     | Emei                      | FX0430                |
| 2   | L7                           | Jumper wire           | Jumper wire instead   | DIP     |                           |                       |
| 1   | Q1                           | IPP60R199CP           | N-channel MOSFET,<br>650V, 16A  | TO220   | Infineon                  | IPP60R199CP           |
| 2   | Q3, Q6                       | IPP65R380E            | N-channel MOSFET,<br>700V, 29A  | TO220   | Infineon                  | IPP65R380E6           |
| 2   | Q2, Q4                       | IRFB7437              | N-channel MOSFET, 40V,<br>T <sub>O</sub> -220                                   | TO220   | IR                        | IRFB7437              |
| 1   | T1                           | 0.65mH                | Transformer, L <sub>P</sub> = 0.65mH,<br>N1:N2:N3:N4:N5 =<br>48:5:5:3:3, PQ3230 | DIP     | Emei                      | FX0433                |
| 1   | U3                           | HR1203                | PFC + LLC COMBO<br>controller   | SOIC28  | MPS                       | HR1203GY              |
| 1   | U6                           | TL431                 | Shunt regulator, V <sub>REF</sub> =<br>2.5V                                     | SOT-23  | Changjiang<br>Electronics | TL431                 |
| 1   | U5                           | PC817C                | Photocoupler, single-<br>channel  | DIP     | SHARP                     | PC817C                |
| 1   | U2                           | MP6922                | SR controller   | SOIC8   | MPS                       | MP6922DS-LF-Z         |
| 1   | LED1                         | HL-PSC-<br>2012H203BC | LED, blue   | 0805    | BRIGHT LED                | HL-PSC-<br>2012H203BC |
| 5   | VOUT,<br>GND, L, N,<br>Earth |                       | 2mm connector pin   |         |                           |                       |
| 1   | HS1                          |                       |   |         |                           |                       |
| 1   | HS2                          |                       |   |         |                           |                       |
| 1   | HS3                          |                       |   |         |                           |                       |
| 1   | HS4                          |                       |   |         |                           |                       |
| 1   | CN2                          |                       | Connector 2*5   |         |                           |                       |
| 1   | PCB                          |                       | EVHR1203-Y-00A  |         |                           |                       |

## EVB TEST RESULTS


Performance waveforms are tested on the evaluation board.

$V_{IN\_AC} = 90V$  to  $265V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 20A$ ,  $P_{OUT} = 240W$

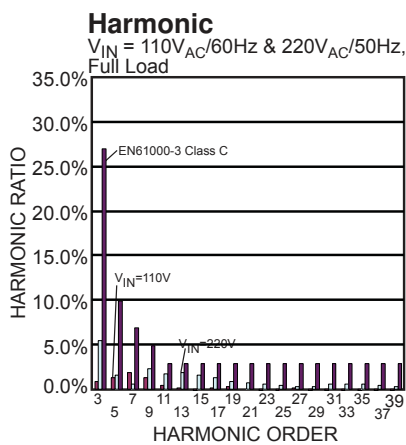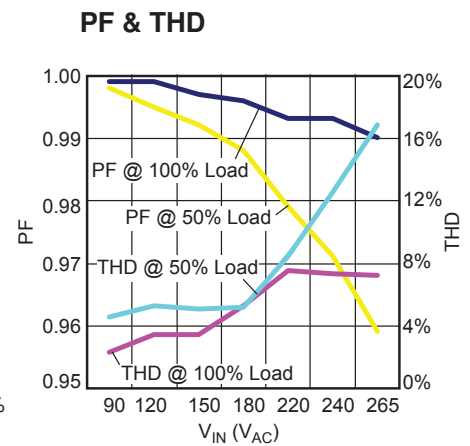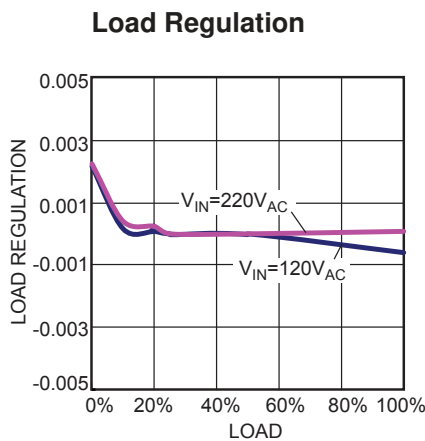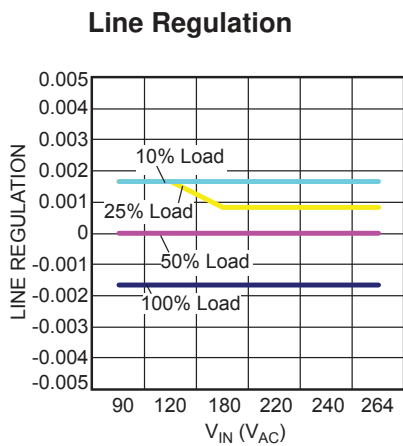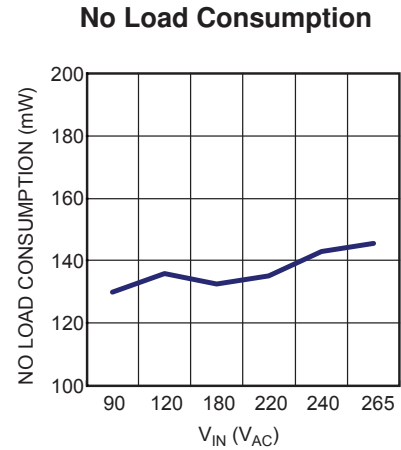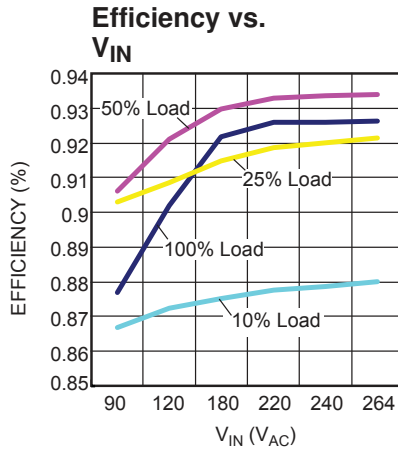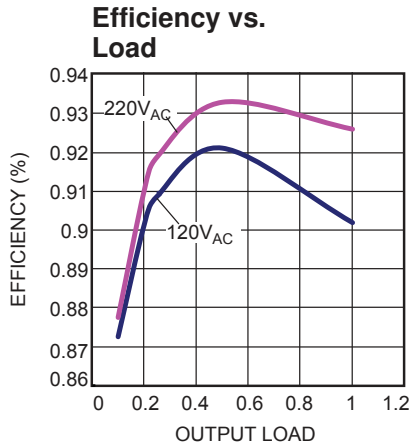


**EVB TEST RESULTS (continued)**


Performance waveforms are tested on the evaluation board.

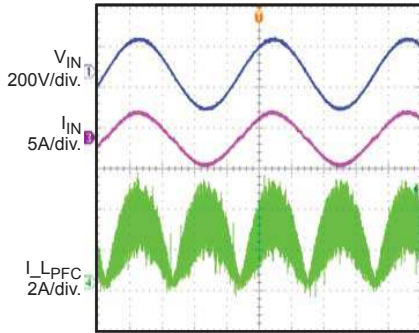 $V_{IN\_AC} = 90V$  to  $265V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 20A$ ,  $P_{OUT} = 240W$ 
**Input Voltage & Current**
 $V_{IN} = 115V_{AC}$ , Full Load


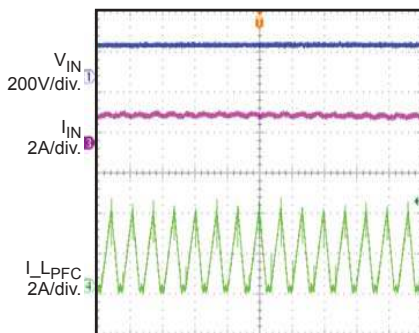
4ms/div.

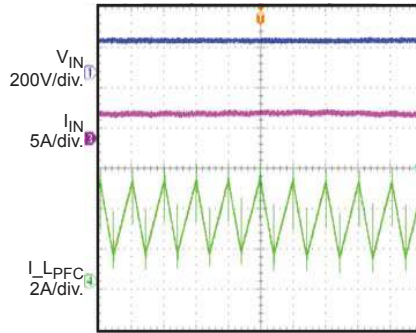**PFC Stage**
 $V_{IN} = 115V_{AC}$ , Full Load


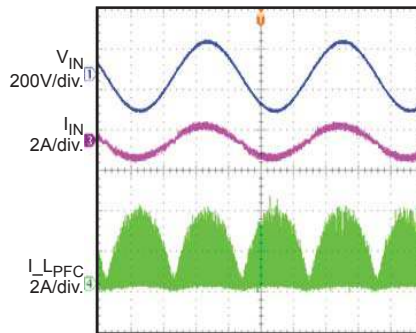
10µs/div.

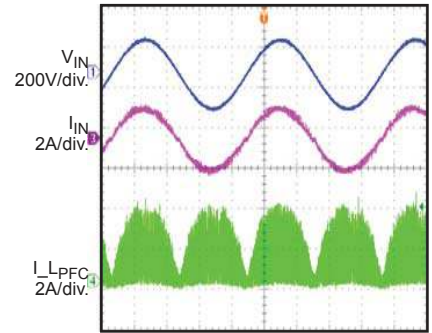**Input Voltage & Current**
 $V_{IN} = 115V_{AC}$ , 50% Load


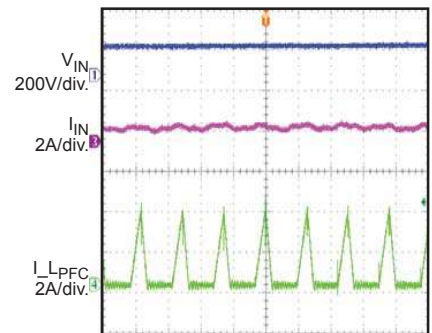
4ms/div.

**PFC Stage**
 $V_{IN} = 115V_{AC}$ , 50% Load


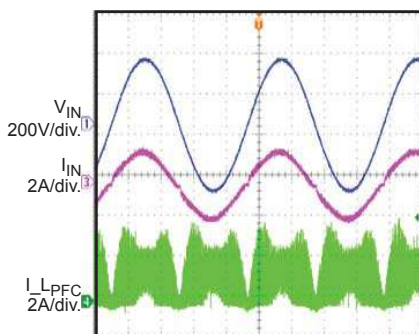
20µs/div.

**Input Voltage & Current**
 $V_{IN} = 115V_{AC}$ , 25% Load


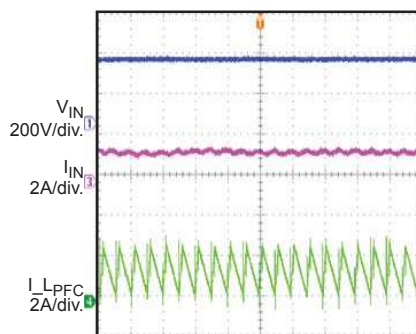
4ms/div.

**PFC Stage**
 $V_{IN} = 115V_{AC}$ , 25% Load


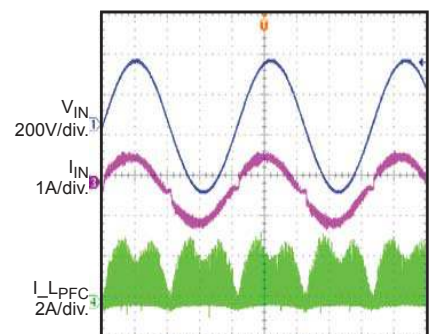
20µs/div.

**Input Voltage & Current**
 $V_{IN} = 230V_{AC}$ , Full Load


4ms/div.

**PFC Stage**
 $V_{IN} = 230V_{AC}$ , Full Load


20µs/div.








**Input Voltage & Current**
 $V_{IN} = 230V_{AC}$ , 50% Load


4ms/div.




**EVB TEST RESULTS (continued)**

Performance waveforms are tested on the evaluation board.

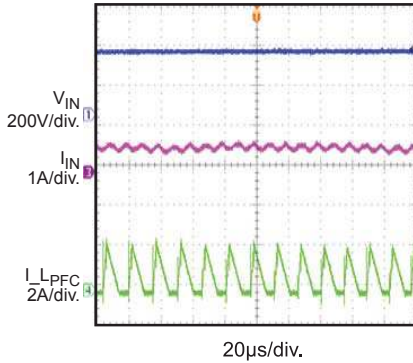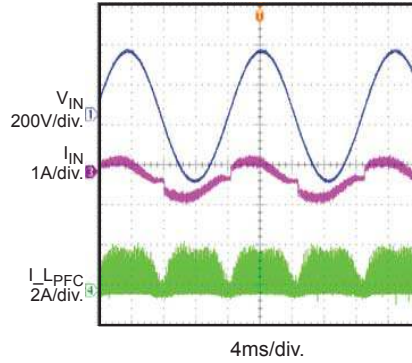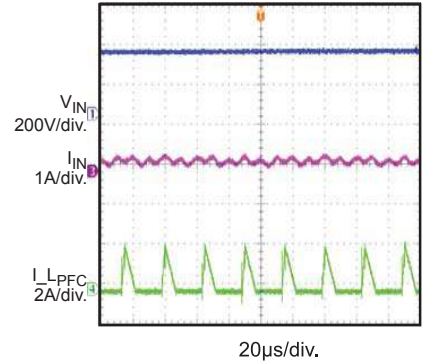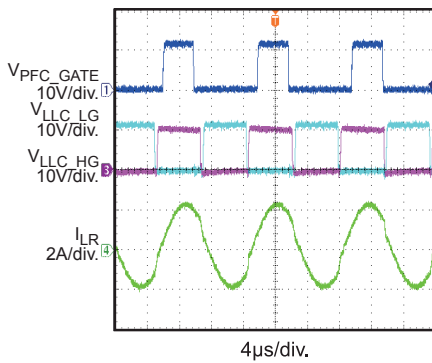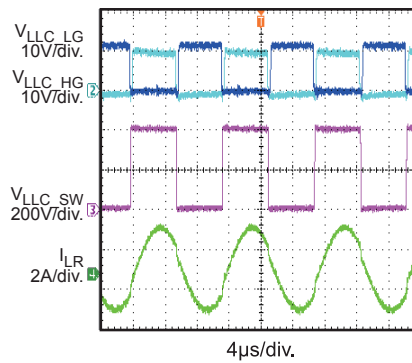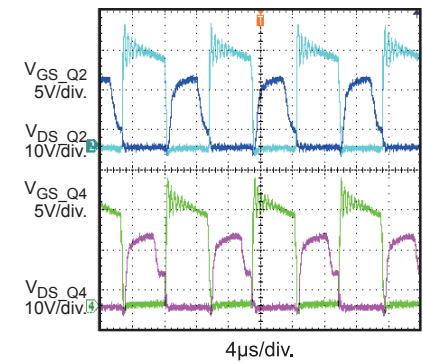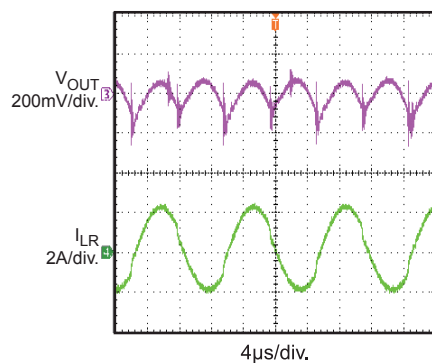 $V_{IN\_AC} = 90V \text{ to } 265V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 20A$ ,  $P_{OUT} = 240W$ 
**PFC Stage**
 $V_{IN} = 230V_{AC}$ , 50% Load

**Input Voltage & Current**
 $V_{IN} = 230V_{AC}$ , 25% Load

**PFC Stage**
 $V_{IN} = 230V_{AC}$ , 25% Load

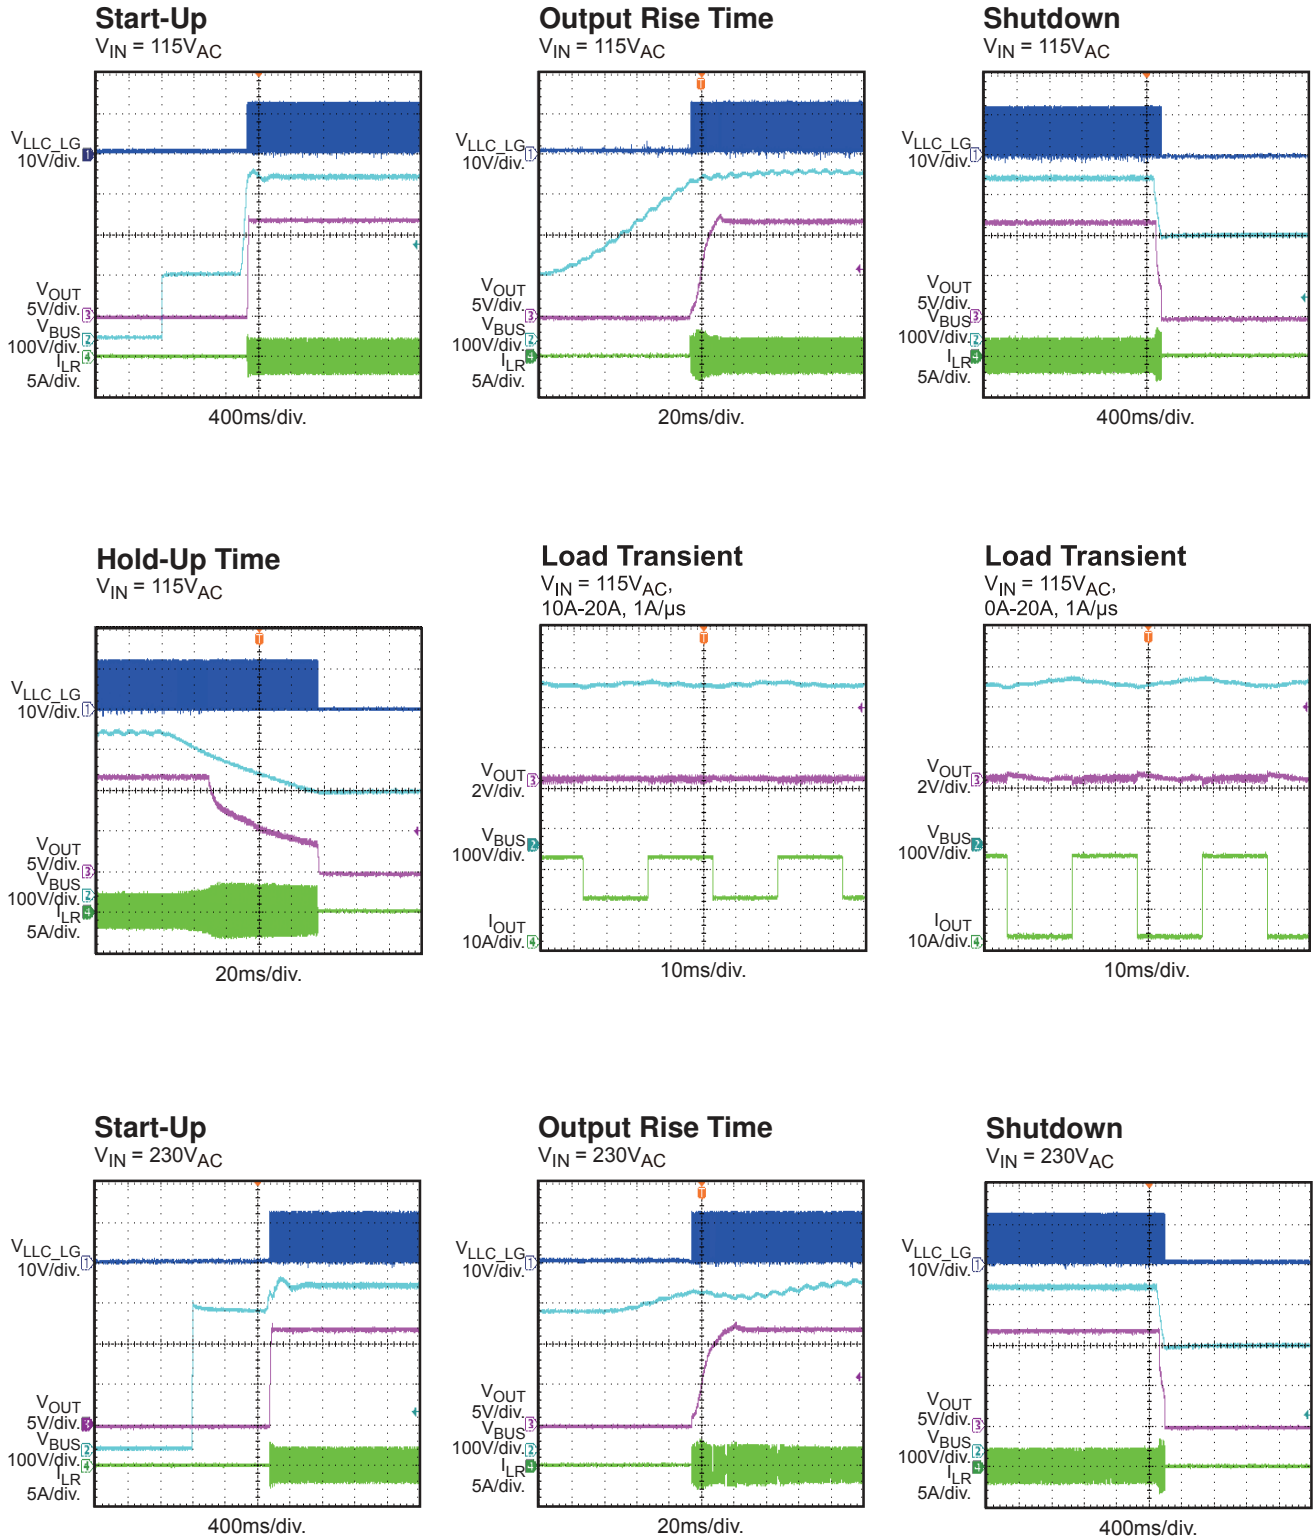**Steady State**

**LLC Stage**

**SR Operation**

**Output Ripple**


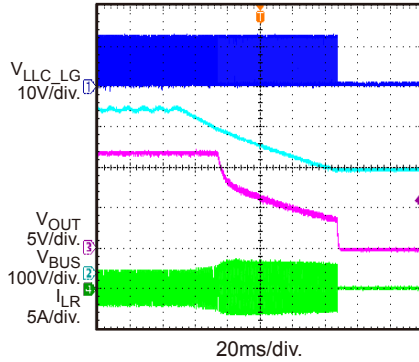
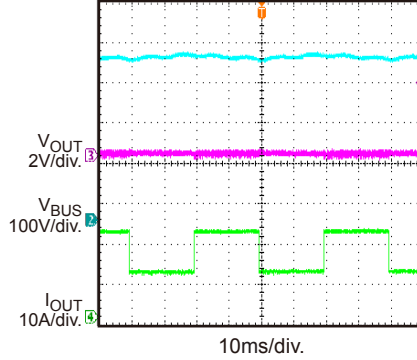
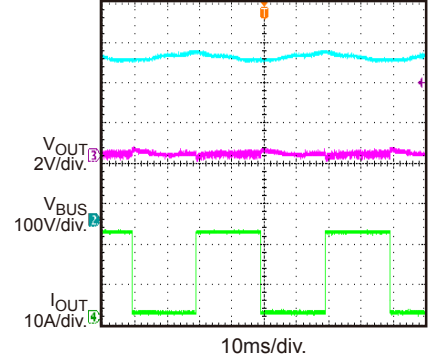
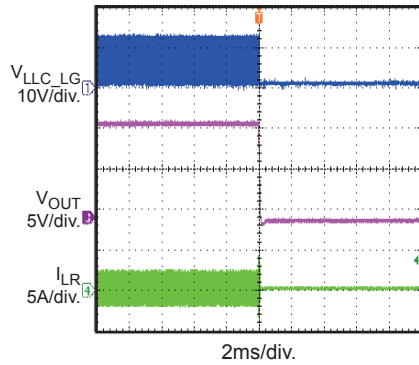
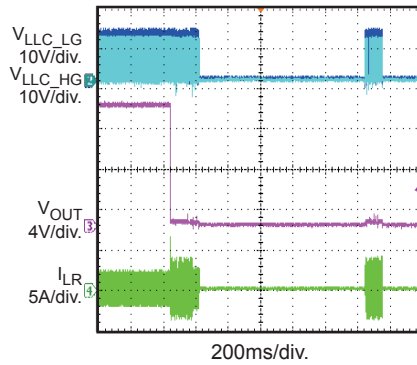
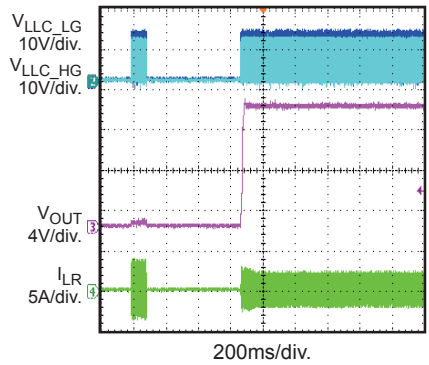
**EVB TEST RESULTS (continued)**

Performance waveforms are tested on the evaluation board.

 $V_{IN\_AC} = 90V$  to  $265V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 20A$ ,  $P_{OUT} = 240W$ 


**EVB TEST RESULTS (continued)**

Performance waveforms are tested on the evaluation board.

 $V_{IN\_AC} = 90V$  to  $265V$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 20A$ ,  $P_{OUT} = 240W$ 
**Hold-Up Time**
 $V_{IN} = 230V_{AC}$ 

**Load Transient**
 $V_{IN} = 230V_{AC}$ ,  
 10A-20A, 1A/ $\mu$ s

**Load Transient**
 $V_{IN} = 230V_{AC}$ ,  
 0A-20A, 1A/ $\mu$ s

**SCP Latch**

**OCP Enter**

**OCP Recovery**


PCB LAYOUT

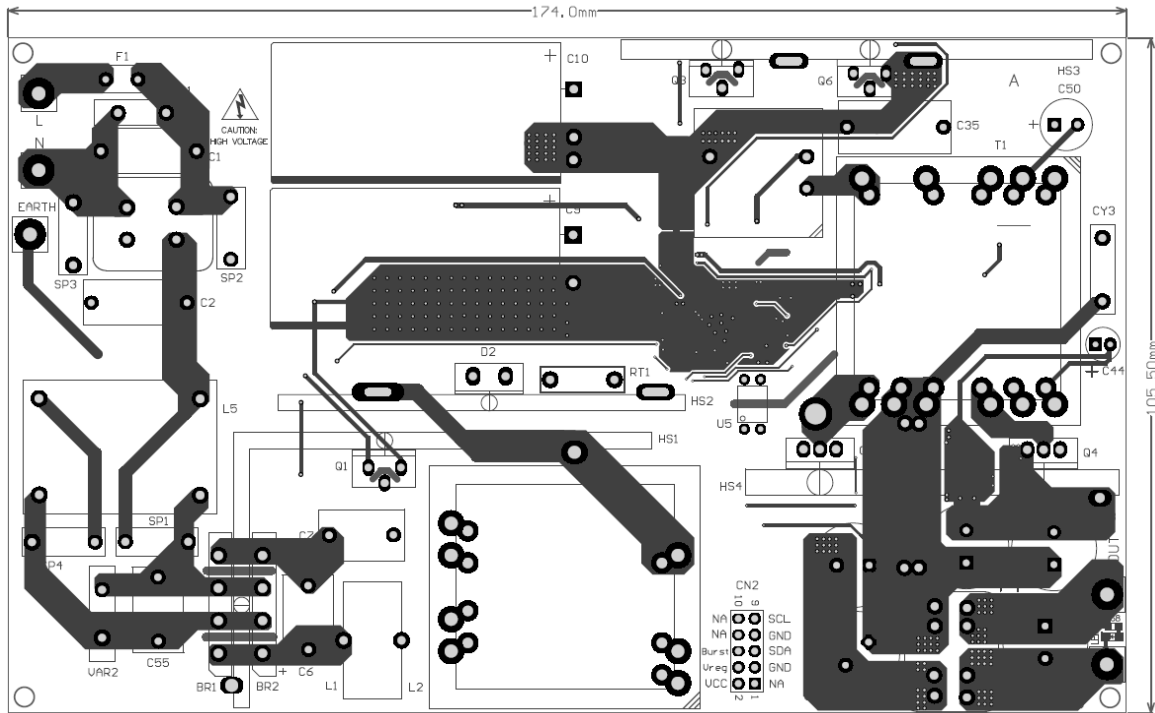


Figure 1: Top Layer

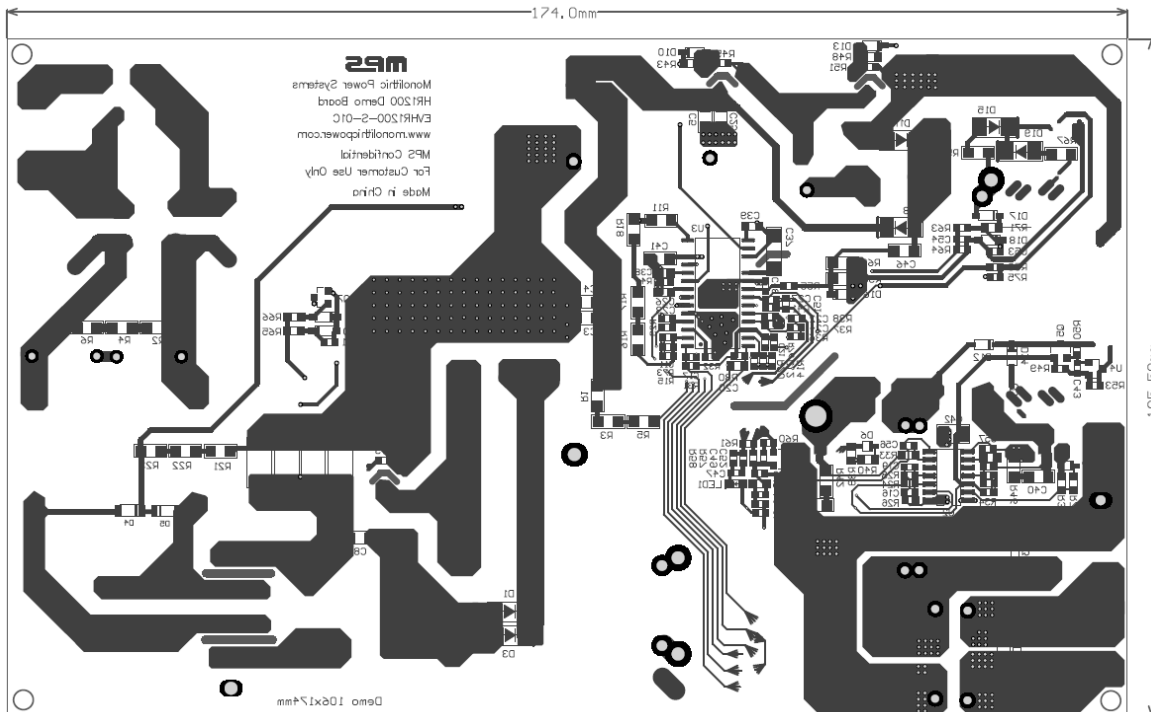


Figure 2: Bottom Layer

## SURGE TEST

Line-to-line 4kV and line-to-power earth 4kV surge testing was completed according to EN61000-4-5 Level 4.


The input voltage was set at 220V<sub>AC</sub>/50Hz. The output was loaded at full load, and operation was verified following each surge event (see Table 1).

**Table 1: Surge Test Results**

| Surge Level (V) | Input Voltage (V <sub>AC</sub> ) | Injection Location | Injection Phase (°) | Test Result (Pass/Fail) |
|-----------------|----------------------------------|--------------------|---------------------|-------------------------|
| 4000            | 220                              | L to N             | 90                  | Pass                    |
| -4000           | 220                              | L to N             | 270                 | Pass                    |
| 4000            | 220                              | L to PE            | 90                  | Pass                    |
| -4000           | 220                              | L to PE            | 270                 | Pass                    |
| 4000            | 220                              | N to PE            | 90                  | Pass                    |
| -4000           | 220                              | N to PE            | 270                 | Pass                    |


## CONDUCTED EMI TEST

Figure 3 shows the test with a 115V<sub>AC</sub> input and full-load condition.

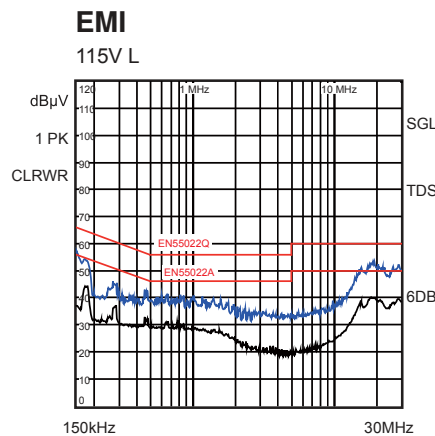

**Figure 3: 115V<sub>AC</sub>, 60Hz, Maximum Load, EN55022 Limits**

Figure 4 shows the test with a 230V<sub>AC</sub> input and full-load condition.

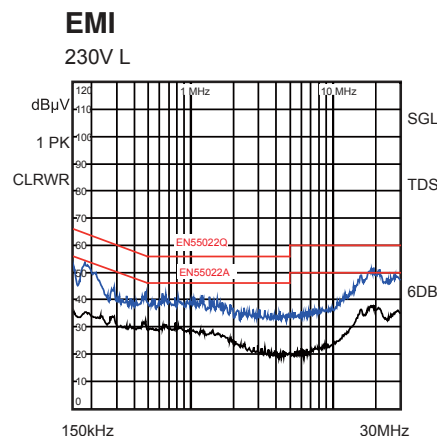


**Figure 4: 230V<sub>AC</sub>, 50Hz, Maximum Load, EN55022 Limits**



**THERMAL TEST**

Figure 5 shows the test with 90V<sub>AC</sub> input and full-load condition. The PCB layout is with 2oz copper. The ambient temperature is 33°C without air flow.

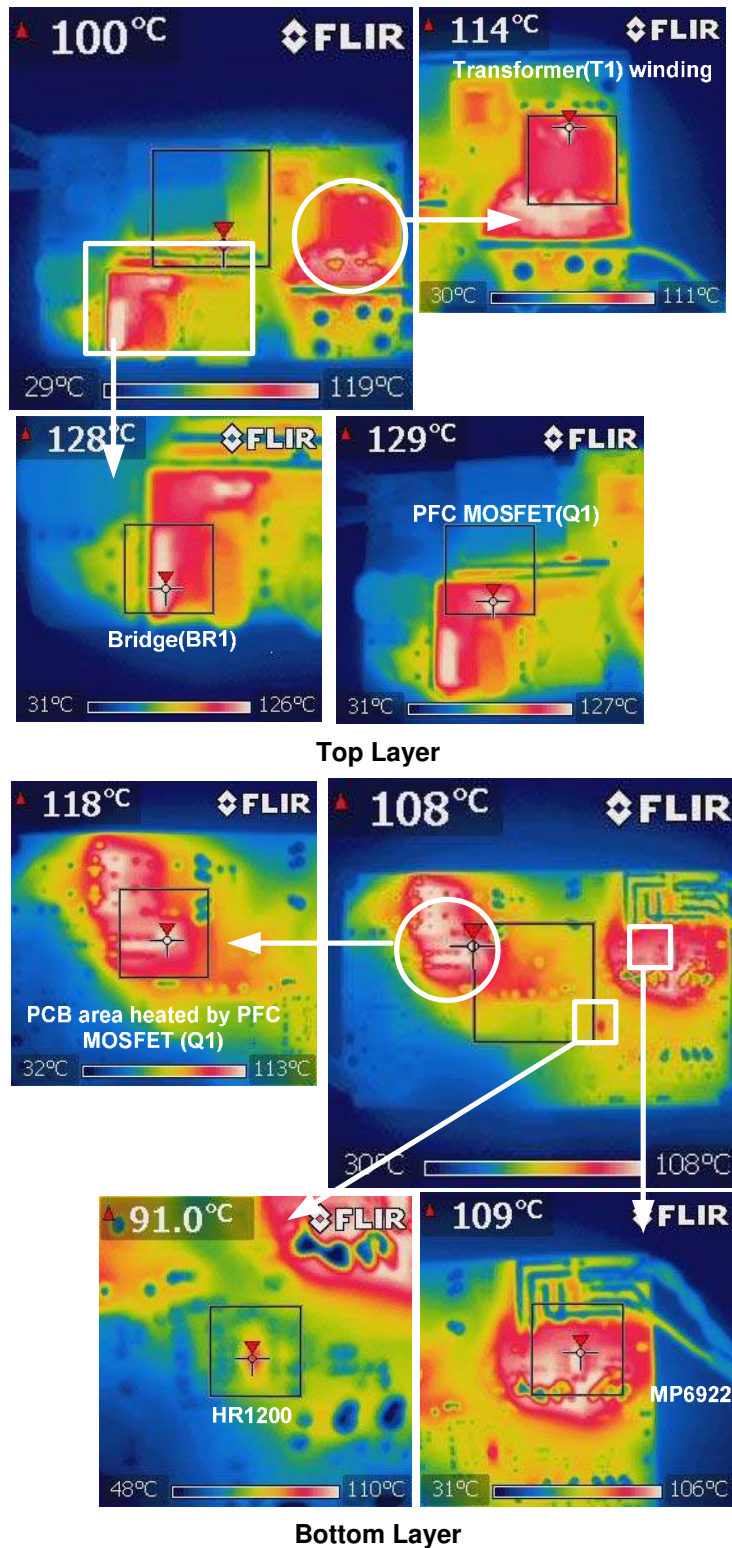

**Figure 5: Temperature Chamber Test**

## QUICK-START GUIDE

To quick start the EVB, follow the steps below.

1. Pre-set the power supply to  $90V_{AC} \leq V_{IN} \leq 265V_{AC}$ .
2. Turn the power supply off.
3. Connect the line and neutral terminals of the power supply output to the L and N ports. For three-wire input applications, connect the earth terminal to the earth port.
4. Connect the positive (+) load to VOUT.
5. Connect the negative (-) load to GND.
6. Turn the power supply on after making the connections.
7. Discharge the bulk capacitor for safety consideration after power-off.

## CONTACT INFORMATION

To request this evaluation board, please refer to your local sales office:

<http://www.monolithicpower.com/Company/Contact-Us>

## DISCLAIMER

Monolithic Power Systems (MPS) reserves the right to make changes to its products and to discontinue products without notice. The applications information, schematic diagrams, and other reference information included herein are provided as a design aid only and are therefore provided as-is. MPS makes no warranties with respect to this information and disclaims any implied warranties of merchantability or non-infringement of third-party intellectual property rights.

MPS cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a MPS product. No circuit patent licenses are implied.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage (“Critical Applications”).




MPS PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE SUPPORT APPLICATIONS, DEVICES OR SYSTEMS, OR OTHER CRITICAL APPLICATIONS.

Inclusion of MPS products in critical applications is understood to be fully at the risk of the customer. Questions concerning potential risk applications should be directed to MPS.


MPS semiconductors are typically used in power supplies in which high voltages are present during operation. High-voltage safety precautions should be observed in design and operation to minimize the chance of injury.

## REVISION HISTORY

| Date | Author | Revision | Description & Changes | Reviewed |
|------|--------|----------|-----------------------|----------|
|      |        |          |                       |          |
|      |        |          |                       |          |

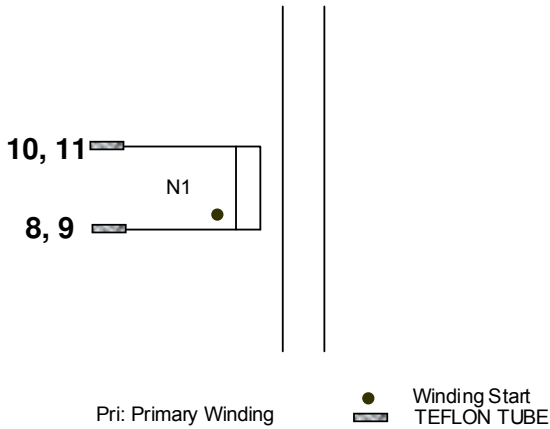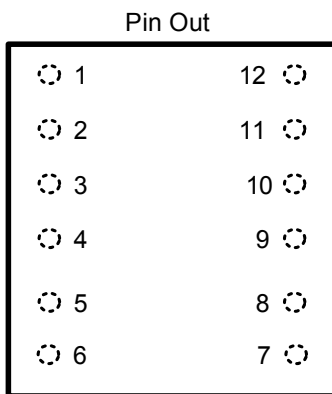**APPENDIX 1: PFC INDUCTOR SPECIFICATION**
**Electrical Diagram**

**Winding Diagram**

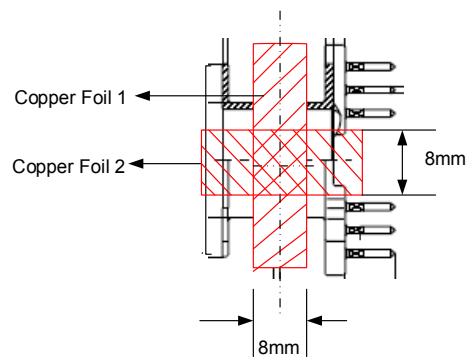**Pin Definition of Bobbin**


View from the Top



**Note:** Core is wrapped with copper foils, as shown above. Connect the foils to pin 4 of the bobbin with wires.




**Table 2: Electrical Characteristic**

| Parameter          | Condition       | Value                 |
|--------------------|-----------------|-----------------------|
| Primary inductance | L (8, 9-10, 11) | 260 $\mu$ H $\pm$ 10% |
| Core               |                 | PQ3230                |
| Bobbin             |                 | PQ3230                |
| Core material      |                 | DMR40 or equivalent   |
| Turn ratio         | N1              |                       |

**Table 3: Winding Specification**

| Tape Turns | Winding No. | Margin Tapes | Start and End | Wire Diameter (mm) | Turns |
|------------|-------------|--------------|---------------|--------------------|-------|
| 1          | N1          |              | 8, 9→10, 11   | 0.1x100            | 30    |

## APPENDIX 2: LLC TRANSFORMER SPECIFICATION

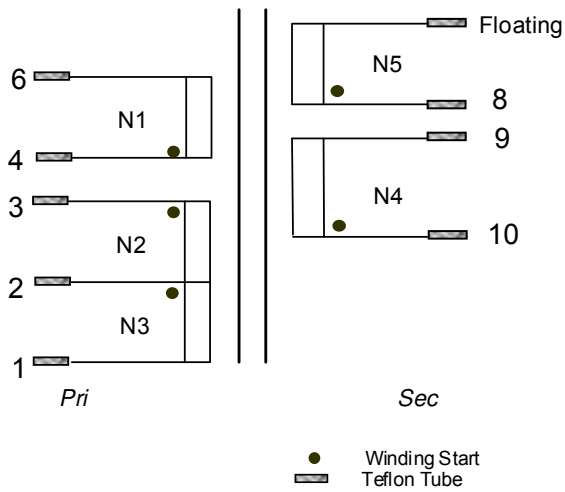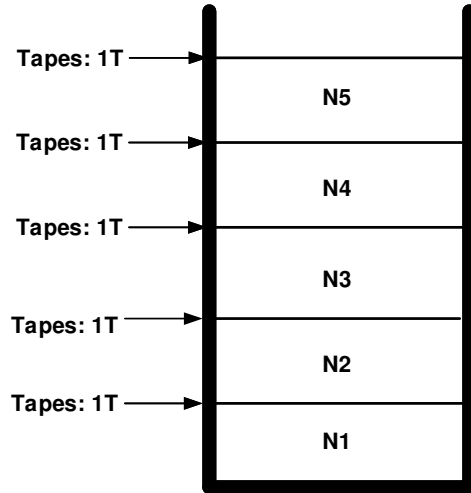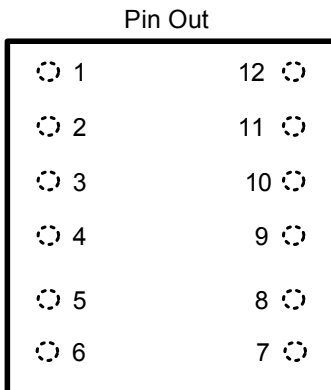**Electrical Diagram**

**Winding Diagram**

**Pin Definition of Bobbin**


View from the Top

**Table 4: Electrical Characteristic**


| Parameter          | Condition      | Value               |
|--------------------|----------------|---------------------|
| Primary inductance | $L_P$ (4-6)    | 0.55mH $\pm$ 5%     |
| Core               |                | PQ3230              |
| Bobbin             |                | PQ3230              |
| Core material      |                | DMR44 or equivalent |
| Turn ratio         | N1:N2:N3:N4:N5 | 48:5:5:3:3          |

**Table 5: Winding Specification**


| Tape Turns | Winding No. | Margin Tapes | Start and End | Wire Diameter (mm) | Turns |
|------------|-------------|--------------|---------------|--------------------|-------|
| 1          | N1          |              | 4→6           | 0.1x30             | 48    |
| 1          | N2          |              | 3→2           | 0.2x3              | 5     |
| 1          | N3          |              | 2→1           | 0.2x3              | 5     |
| 1          | N4          |              | 8→floating    | 0.1x100            | 3     |
| 1          | N5          |              | 10→9          | 0.1x100            | 3     |

### APPENDIX 3: LLC RESONANT INDUCTOR SPECIFICATION


Electrical Diagram

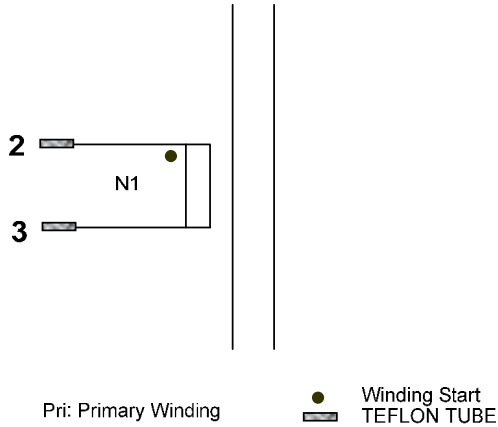

Winding Diagram

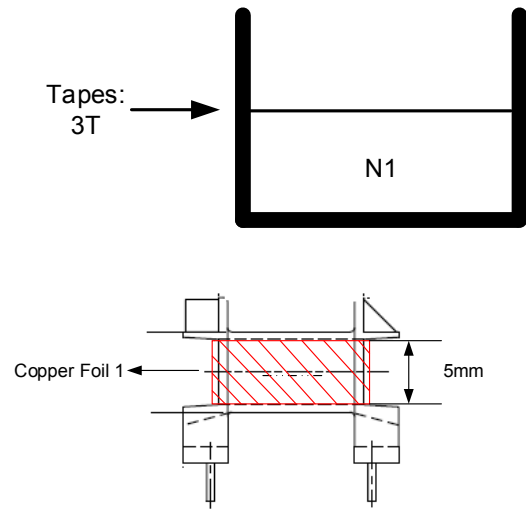

Pin Definition of Bobbin



View from the Top

**Note:** Core is wrapped with copper foil, as shown above. Connect the foils to pin 6 of the bobbin with wires.

Table 6: Electrical Characteristic

| Parameter          | Condition | Value               |
|--------------------|-----------|---------------------|
| Primary inductance | L (2-3)   | 80µH ±5%            |
| Core               |           | EE20/10/6           |
| Bobbin             |           | EE20/10/6           |
| Core material      |           | DMR40 or equivalent |
| Turn ratio         | N1        | 40                  |

Table 7: Winding Specification

| Tape Turns | Winding No. | Margin Tapes | Start and End | Wire Diameter (mm) | Turns |
|------------|-------------|--------------|---------------|--------------------|-------|
| 3          | N1          |              | 2→3           | 0.1x30             | 40    |

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.