

RTKA223011DE0020BU
 

---

The RTKA223011DE0020BU evaluation board is a high voltage buck converter that evaluates a low-cost high performance non-isolated AC/DC conversion from a universal input of  $85V_{AC} \sim 265V_{AC}$  to a 12V output with output current up to 300mA.

The board has built-in overcurrent, short-circuit, input brownout, and over-temperature protections, and is on a single-side PCB with a single diode half-wave input rectification.

RTKA223011DE0020BU comes with a [RAA223011](#) in a 7LD SOIC package.

### Features

- Universal input
- Single-side PCB with low cost external components
- Standby power less than 8mW
- No audible noise

### Specifications

This board is optimized for the following operating conditions:

- Input voltage:  $85V_{AC} \sim 265V_{AC}$
- Output voltage:  $12V_{DC}$
- Output current: 300mA max (at  $230V_{AC}$  or higher)
- Output power: 3.96W
- Efficiency: >68% at 100% load; 80% at 50% load
- No-load power: 6.7mW at  $120V_{AC}$ ; 7.6mW at  $230V_{AC}$
- Load regulation: -4.7%, load range 10% to 100%
- Operating temperature:  $-45^{\circ}C \sim 65^{\circ}C$
- Board dimension: 40mm x 60mm

## Contents

<b>1. Circuit Description</b>	<b>3</b>
1.1 Recommended Equipment	3
1.2 Quick Start Guide	3
<b>2. Board Design</b>	<b>4</b>
2.1 PCB Layout Guidelines	4
2.2 Schematic Drawings	5
2.3 Bill of Materials	6
2.4 Board Layout	7
<b>3. Typical Performance Graphs</b>	<b>8</b>
<b>4. Ordering Information</b>	<b>8</b>
<b>5. Revision History</b>	<b>8</b>

# 1. Circuit Description

The RTKA223011DE0020BU is a buck regulator implemented with a high-side float-switching topology, with switching frequency up to 30kHz. Its input has D1 and D7 operating as a low-cost half wave rectifier (with an optional full bridge rectifier foot-print). FR is a 1W fusible resistor providing input overcurrent protection and inrush current limiting.

C1, L1, and C2 consists of the input filter that provides the energy buffer after rectification and reduces conducted EMI noises to the input. L2, D2, and C<sub>OUT</sub> are the buck converter components. D3, RFB1, RFB2, CFB2, and CFB1 provide the output feedback signal to the IC. D4 and R2 provide V<sub>CC</sub> biasing current after startup, to increase the efficiency. They can be optional for low-cost, low-power applications. C<sub>VCC</sub> is the IC supply capacitor.

## 1.1 Recommended Equipment

- AC power supply capable of generating AC voltage from 85V<sub>AC</sub> to 265V<sub>AC</sub> at 60Hz/50Hz, with at least 100mA output current capability.
- Load resistor box with adjustable value of 40Ω and up, or an electronic load that can emulate a resistor load or current load up to 300mA.
- Multi-meters to measure the output voltage and current.
- Power meter to measure the AC input power.

## 1.2 Quick Start Guide

1. Program the AC power supply with a voltage between 85V<sub>AC</sub> and 265V<sub>AC</sub> at the corresponding frequency of 60Hz or 50Hz.
2. While the AC power supply is off, connect the output cables of the AC power supply to the L and N terminal of the RTKA223011DE0020BU. An optional power meter can be added in between AC power supply output and the input of the board.
3. Connect the load to the output terminals VOUT and GND.
4. Connect a voltage meter to VOUT and GND and connect a current meter between board outputs and the load.
5. Turn on AC power supply.

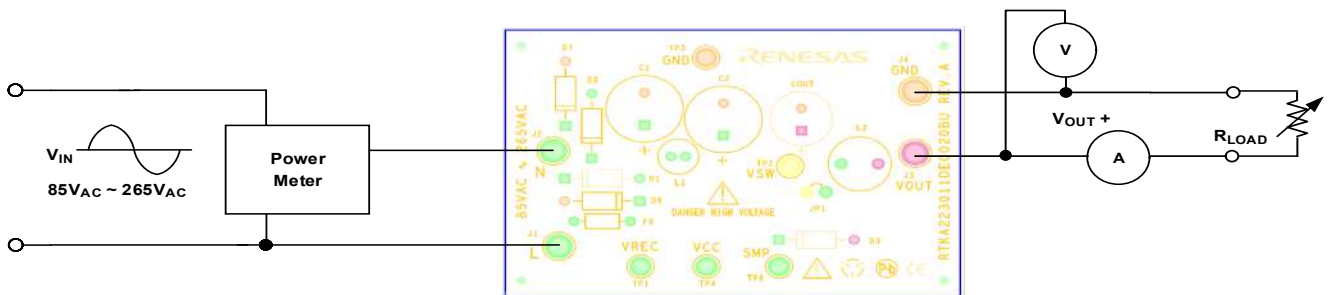


Figure 1. RTKA223011DE0020BU Connection Diagram

## 2. Board Design



Figure 2. RTKA223011DE0020BU Evaluation Board (Top)



Figure 3. RTKA223011DE0020BU Evaluation Board (Bottom)

### 2.1 PCB Layout Guidelines

For detailed PCB guidelines, see the RAA223011 datasheet.



## 2.3 Bill of Materials

Qty	Reference Designator	Description	Manufacturer	Part Number
1	COUT	CAP ALUM, 470 $\mu$ F, 20%, 16V, Radial	Rubycon	16ZLH470MEFCT78X11.5
3	D1, D3, D7	Generic Diode, 1kV, 1A, DO41	Generic	1N4007
1	C3	Multilayer Cap, 0.47 $\mu$ F, 16V, 10%, 0603	TDK	C1608X7R1C474K
1	FR	Miniture Metal Film Resistor, 15 $\Omega$ , 1W, 5%, Axial, TH	Yageo	FKN1WSJR-52-15R
1	D4	1A 600V Fast Rectifier Diode, DO214	FAIRCHILD	ES1J
2	C1, C2	CAP ALUM, 4.7 $\mu$ F, 20%, 400V, Radial	KEMET	ESG475M400AH2AA
1	C4	Multilayer Cap, 0.1 $\mu$ F, 25V, 10%, 0603	Generic	Various
1	CFB2	Multilayer Cap, 470PF, 50V, 10%, 0603	Generic	Various
1	CFB1	Multilayer Cap, 0.22 $\mu$ F, 25V, 20%, 0603	Generic	Various
1	CVCC	Multilayer Cap, 1 $\mu$ F, 25V, 10%, 0805	Generic	Various
1	RFB2	Thick Film Chip Resistor, 100k, 1%, 1/16W, 0603	Generic	Various
1	R2	Thick Film Chip Resistor, 40.2k, 1%, 1/10W, 0603	Generic	Various
1	R1	Thick Film Chip Resistor, 68k, 5%, 1/16W, 0603	Generic	Various
1	RFB1	Thick Film Chip Resistor, 402k, 1%, 1/10W, 0805	Generic	Various
1	JP1	Two Pin Jumper	Generic	JUMPER2_100
1	D2	Ultrafast Power Rectifier, 600V, 2A, SMB	On Semiconductor	MURS160T3
1	U1	700V AC/DC Buck Regulator, SO7	Renesas	RAA2230114GSP#AA1
1	L2	FIXED INDUCTOR, 1MH, 15%, 470MA, 1.915 $\Omega$ , TH	sumida	RCH8011NP-102L
1	L1	RLB Series Radial Lead Inductor, 1mH, 10%, 100mA, 11.5 $\Omega$ , TH	bourns	RLB0608-102KL



### 3. Typical Performance Graphs

$V_{in} = 85V_{AC} \sim 265V_{AC}$ ,  $V_{OUT} = 12V$ ,  $I_{OUT} = 300mA$  (maximum),  $T_A = +25^{\circ}C$

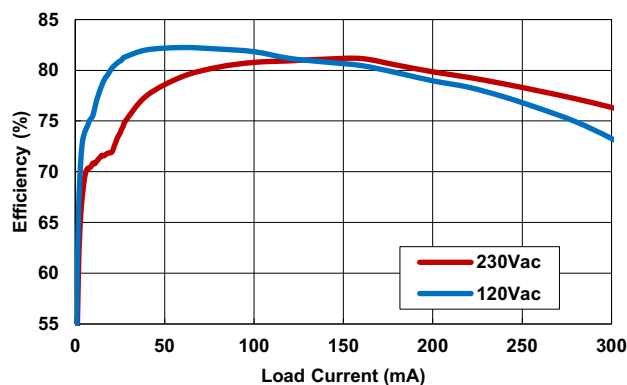


Figure 7. Efficiency Overload Current

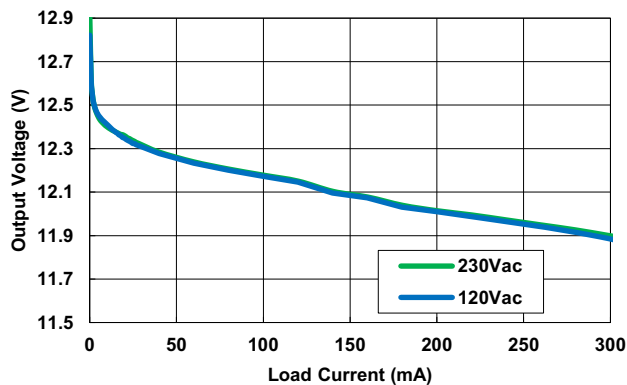


Figure 8. Load Regulation

Table 1. Typical No-Load Power Consumption

Power Supply	Standby Power	Energy Star
120V <sub>AC</sub> /60Hz	6.7mW	300mW
230V <sub>AC</sub> /50Hz	7.6mW	300mW

### 4. Ordering Information

Part Number	Description
RTKA223011DE0020BU	RAA223011 7 LD SOIC evaluation board

### 5. Revision History

Revision	Date	Description
1.1	Mar 30, 2021	Applied new template. Updated V <sub>OUT</sub> value in Typical Performance Graphs heading.
1.0	Feb 11, 2021	Initial release



## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.