




GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz

Typical Applications

The HMC6741LS7 is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios
- SATCOM
- Military & Space
- Marine Radar

Functional Diagram



Features

High P1dB Output Power: +36 dBm High Psat Output Power: +38 dBm High Gain: 35 dB High Output IP3: +44 dBm Supply Voltage: Vdd = +7V @ 2400 mA 50 Ohm Matched Input/Output No external matching required

General Description

The HMC6741LS7 is a four stage GaAs pHEMT MMIC High Power Amplifier with a temperature compensated on chip power detector which operates between 9 and 13 GHz. The amplifier provides 35 dB of gain, +38 dBm of saturated output power, and 25% PAE from a +7V supply. With up to +44.5 dBm Output IP3. The HMC6741LS7 is ideal for high linearity applications in military and space applications as well as point-to-point and point-to-multi-point radios. The HMC6741LS7 amplifier I/Os are internally matched.

Electrical Specifications, $T_{A} = +25^{\circ}$ C, Vdd1-8 = +7V, Idd = 2400 mA^[1]

v01.0414

Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Units
Frequency Range		9 - 10		10 - 12			GHz
Gain	32	35		31.5	34.5		dB
Gain Variation Over Temperature		0.056			0.058		dB/°C
Input Return Loss		23			16		dB
Output Return Loss		20			16		dB
Output Power for 1 dB Compression (P1dB)	32	35		33	36		dBm
Saturated Output Power (Psat)		37			38		dBm
Output Third Order Intercept (IP3) ^[2]		44			44.5		dBm
Total Supply Current		2400			2400		mA

[1] Adjust Vgg between -2 to 0V to achieve Idd = 2400 mA typical.


[2] Measurement taken at Pout / tone = +20 dBm.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.







GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz




v01.0414

Input Return Loss vs. Temperature







Gain vs. Temperature



Output Return Loss vs. Temperature



P1dB vs Supply Voltage









GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz






v01.0414


P1dB vs. Supply Current




Output IP3 vs. Temperature, Pout/tone = +20 dBm








Psat vs. Supply Current



Output IP3 vs. Supply Current, Pout/tone = +20 dBm




Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.







GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz



v01.0414




Output IM3 @ Vdd = +6V




Power Compression @ 9.5 GHz




Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.



Output IM3 @ Vdd = +7V




Power Compression @ 11 GHz








GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz





v01.0414

Reverse Isolation vs. Temperature




Gain & Power vs. Supply Voltage @ 11 GHz






Gain & Power vs. Supply Current @ 11 GHz



Power Dissipation



Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.





GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz

Absolute Maximum Ratings

Drain Bias Voltage (Vdd)	+8 Vdc
Gate Bias Voltage (Vgg)	-3 - 0 Vdc
RF Input Power (RFIN)	+27 dBm
Channel Temperature	150 °C
Continuous Pdiss (T= 85 °C) (derate 294 mW/°C above 85 °C)	19.2 W
Thermal Resistance (channel to ground paddle)	3.39 °C/W
Storage Temperature	-65 to 150 °C
Operating Temperature	-40 to 85 °C
ESD Sensitivity (HBM)	Class 1A

v01.0414


Typical Supply Current vs. Vdd

Vdd (V)	ldd (mA)
+5	2400
+6	2400
+7	2400

Adjust Vgg1 to achieve Idd = 2400 mA



Outline Drawing

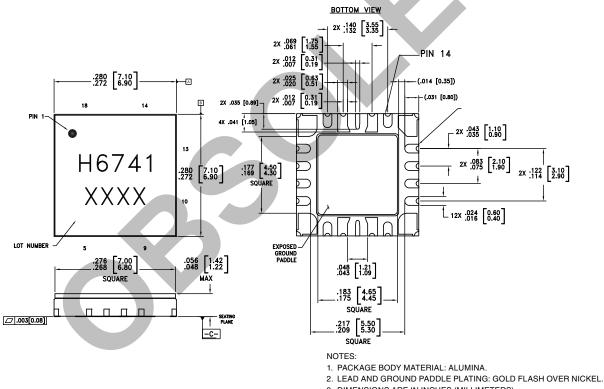

- 3. DIMENSIONS ARE IN INCHES (MILLIMETERS).
- 4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
- 5. PACKAGE WARP SHALL NOT EXCEED 0.05 MM DATUM C -
- 6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating ^[2]	Package Marking ^[1]
HMC6741LS7	ALUMINA WHITE	Gold over Nickel	N/A	<u>H6741</u> XXXX

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.



v01.0414

HMC6741LS7



GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	Vref	DC voltage of diode biased through external resistor used for temperature compensation of Vdet.	OVref
2, 3, 4, 5, 10, 11, 12, 13	Vdd7, Vdd5, Vdd3, Vdd1, Vdd2, Vdd4, Vdd6, Vdd8	Drian bias voltage for the amplifier. External bypass capaci- tors of 100pF, 0.01uF and 4.7uF are required.	oVdd1−8
6, 8, 15, 17	GND	These pins and package bottom must be connected to RF/DC ground.	
7	RFIN	This pin is DC coupled and matched to 50 Ohms.	
9	Vgg	Gate control for amplifier, Vdd1 - Vdd8. External bypass capacitors of 100pF, 0.01uF and 4.7uF are required.	↓ ↓ Vgg Vgg
14	N/C	This pin is not connected internally, however all datashown herein was measured with this pin connected to RF/DC ground externally	
16	RFOUT	This pin is DC coupled and matched to 50 Ohms.	
18	Vdet	DC voltage representing RF output power rectified by diode which is biased through an external resistor. See application circut.	OVdet




v01.0414

HMC6741LS7



GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz

Application Circuit

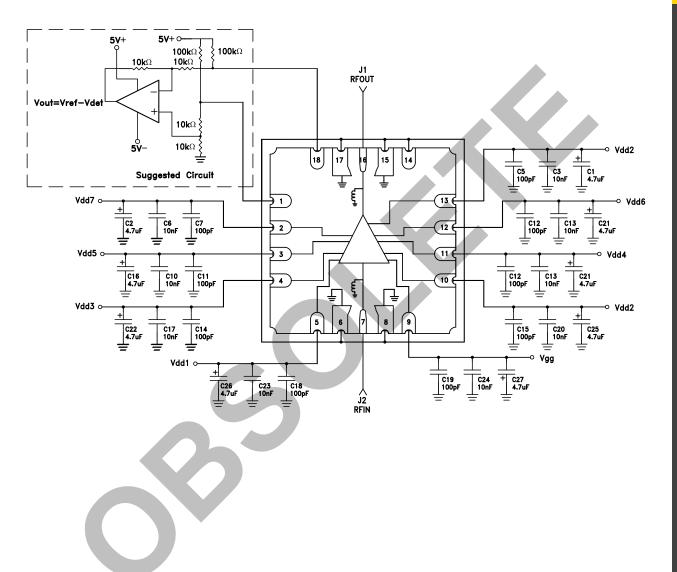

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.





Evaluation PCB

GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz

J U J5 600-00647-00-1 OUT C1 R1]4 THRU CAI H6741 C16 610 Æ1Æ XXXX 015 C20 e) e <u>18</u> C25 C26 J6 J2

List of Materials for Evaluation PCB EVAL01-HMC6741LS7 [1]

v01.0414

Item	Description		
J1, J2, J5, J6	K Connector SRI		
J3, J4	DC Pin		
R1, R2	40.2K Ohm		
C5, C7, C8, C11, C12, C14, C15, C18, C19	100 pF Capacitor, 0402 Pkg.		
C3, C6, C9, C10, C13, C17, C20, C23, C24	10 nF Capacitor, 0402 Pkg.		
C1, C2, C4, C16, C21, C22, C25, C27	4.7uF Capacitor, Case A.		
U1	HMC6741LS7 Power Amplifier		
РСВ	600-00647-00 Evaluation PCB		

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350 or Arlon FR4

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.



v01.0414

HMC6741LS7



GaAs pHEMT MMIC 4 WATT POWER AMPLIFIER WITH POWER DETECTOR, 9 - 12 GHz

Notes:

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.