



GE Sensing

A COMMITMENT TO EXCELLENCE

GE Sensing, Crown Industrial Estate, Priorswood Road, Taunton, Somerset, TA2 8QY, UK
 Tel +44 (0) 1823 335200 Fax +44 (0) 1823 332637

TEST SPECIFICATION	PART No. YS6176	ISSUE: A
CUSTOMER:	DATE: 28th January, 2010	QUANTITY:
Customer P/N:	ORIGINATOR: M.J.Roberts	PAGE 1 OF 1


DESCRIPTION: PTC THERMISTOR INTENDED FOR USE AS A CURRENT LIMITING PROTECTION DEVICE

MECHANICAL SPECIFICATION

CONSTRUCTION: COATED CERAMIC DISC WITH UNINSULATED LEADWIRES.
 THICK FILM SILVER ELECTRODES

TERMINATIONS: TIN COATED COPPER WIRE, STRAIGHT

DIMENSIONS in mm. NTS: SEE DRAWING BELOW.

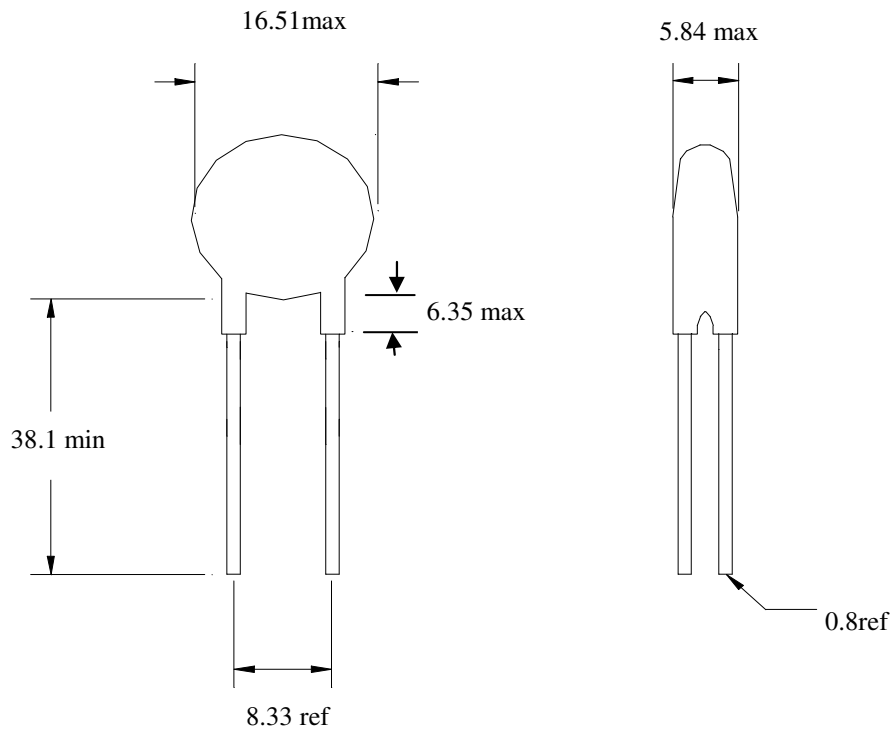

ELECTRICAL SPECIFICATION:

RESISTANCE AT 25°C, R ₂₅ :	3.5 – 6.0Ω	(1)
SWITCHING TEMPERATURE, T _b :	65°C +/-7 °C	(2)
NORMAL OPERATING VOLTAGE:	50Vdc	
MAXIMUM OPERATING VOLTAGE, V _{max} :	75Vdc	

NOTES

- (1) Measuring current: 5A max
- (2) Resistance = 2 × Resistance minimum

CHANGES SINCE LAST ISSUE: Δ							
Issue :	A						
Date :	28/01/10						

The copyright in this Specification/Drawing/Document is the property of Thermometrics and the Specification/Drawing/Document is issued on the condition that it is not copied, reprinted, stored in an electronic retrieval system or reproduced, nor its contents disclosed either wholly or in part to any Third Party without either the consent in writing of or in accordance with the conditions of a contract with Thermometrics@GE THERMOMETRICS.