




UNIT:MM

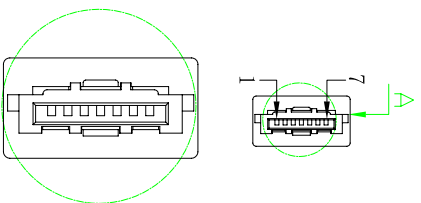

SECTION A-A  
SCALE 2:1

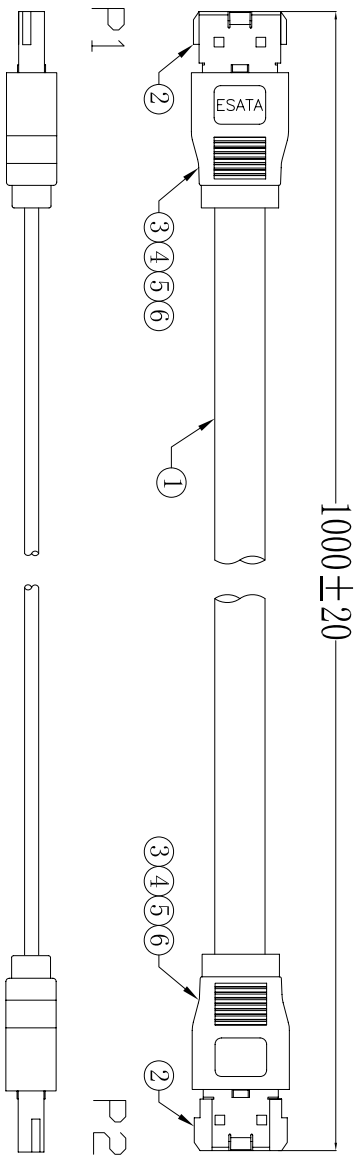

1000 ± 20

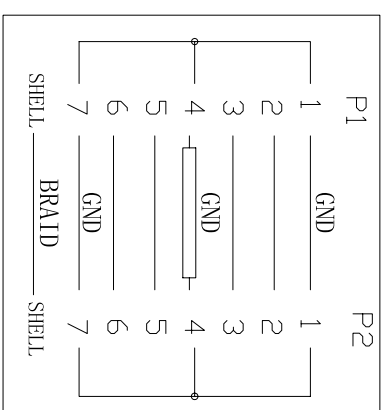


PIN ASSIGNMENT:

ELECTRICAL TEST:  
1.100% OPEN SHORT & MISWIRE TEST.  
2.CONDUCTIVE RESISTANCE:1 ohm MAX.  
3.INSULATION RESISTANCE:10M OHM/MIN  
4.HI-PAT TEST DC 300V

⑧	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"及产周期, 有透气孔
⑦	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PCS"及产周期, 有透气孔
⑥	OUT JACKET	12g	PVC 4SP COLOR BLACK
⑤	COPPER FOIL	2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W:0mm*1.30mm
④	ACETATE	2	ACETATE CLOTH TAPE W:10mm*1.40mm
③	TUBE	2	HEAT SHRINK TUBE BLACK ØD12mm L10mm
②	CONN	2	ESATA BOTTOM METAL SHELL PLATE NICKEL
		2	ESATA TOP METAL SHELL PLATE NICKEL
①	CABLE	2	ESATA 7P/F CRIMP TYPE PIN:G/F INSULATOR:BLACK
		1	UL2725 [26AWG (1/0.404)*2F INS:HD-PE+D/W(1/0.32)*2C+AL/MV]*2F INNER JACKET PVC ØD2.1*7.3mm +BRAID(16/10/0.1)+PVC JACKET COLOR:BLACK ØD4.0*9.0MM L990±10mm.

CNC Tech, LLC		Industrial Cable and Connector Technology	
DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	761-20020-00100
DECIDE BY		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

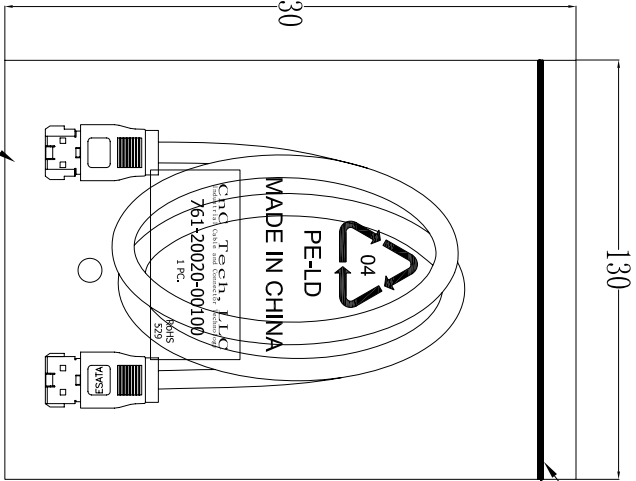

NO.	NAME	QTY	SPECIFICATION
-----	------	-----	---------------