


## STEVAL-ISA158V1

# 38 V, 2 A synchronous step-down switching regulator evaluation board based on the A6986

Data brief

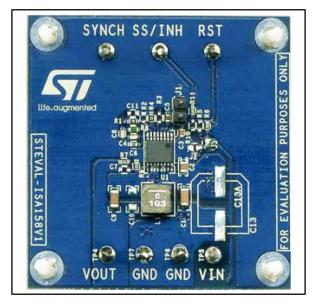

## Description

The STEVAL-ISA158V1 is a product evaluation board based on ST's A6986, a 38 V, 2 A synchronous step-down switching regulator with 30  $\mu$ A of quiescent current. It is designed for automotive system battery-powered applications. It can be used in low consumption mode (LCM) such as in car body implementations, or in low noise mode (LNM) such as in car audio applications.

### Features

- 4 V to 38 V operating input voltage
- Low consumption mode or low noise mode
- 30  $\mu$ A I<sub>Q</sub> at light load (LCM V<sub>OUT</sub> = 3.3 V)
- 5 μA IQ-SHTDWN
- Adjustable fsw (250 kHz 2 MHz)
- Output voltage adjustable from 0.85 V to VIN
- Embedded output voltage supervisor
- Synchronization
- Adjustable soft-start time
- Internal current limiting
- Overvoltage protection
- Output voltage sequencing
- Peak current mode architecture
- $R_{DS(on)HS}$  = 180 m $\Omega$ ;  $R_{DS(on)LS}$  = 150 m $\Omega$
- Thermal shutdown
- RoHS compliant


January 2015

DocID027297 Rev 1

1/5

For further information contact your local STMicroelectronics sales office

## 1 Schematic diagram

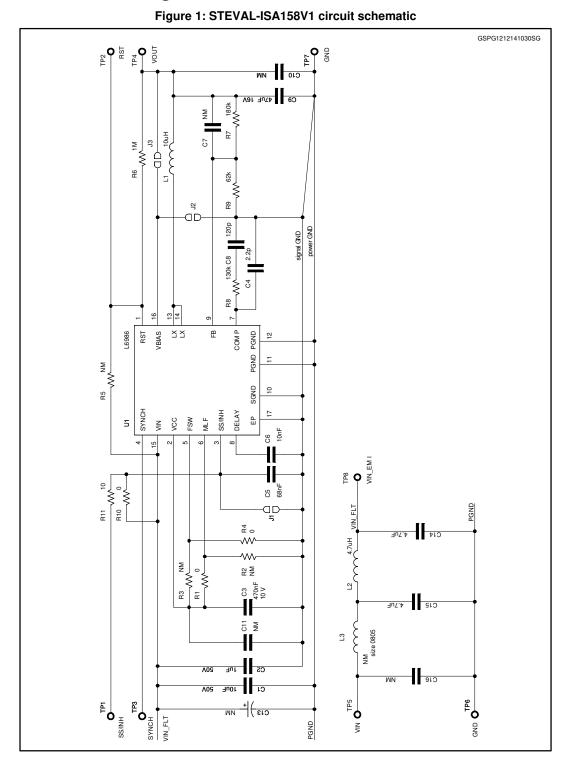

DocID027297 Rev 1



#### STEVAL-ISA158V1

#### Schematic diagram

SA158V1 Schematic diac Table 1: BOM list				
C1	CGA5L3X5R1H106K	10 μF - 1206 - 50 V - X7R - 10%	TDK	
C2	C2012X7S2A105K	1 μF - 0805 - 50 V - X7S - 10%	TDK	
C3		470 nF - 50 V - 0603		
C4		2.2 pF - 50 V - 0603		
C5		68 nF - 50 V - 0603		
C6		10 nF - 50 V - 0603		
C8		120 pF - 50 V - 0603		
C9	C3216X5R1C476M	47 μF - 1206 - 16 V - X5R - 20%	TDK	
C14, C15, C16	C3216X7R1H475K160AC	4.7 μF - 1206 - 50 V - X7R - 10%	TDK	
C7, C10, C11, C13		Not mounted		
R1, R4		0 R - 0603		
R6		1 ΜΩ - 1% - 0603		
R7		180 kΩ - 1% - 0603		
R8		130 kΩ - 1% - 0603		
R9		62 kΩ - 1% - 0603		
R11		10 Ω - 1% - 0603		
R2, R3, R5, R10		Not mounted		
L1	XAL5050-103MEC	10 μH	Coilcraft	
L2	XAL5030-472MEC	4.7 μΗ	Coilcraft	
L3	MPZ2012S221A	EMC bead	TDK	
J1	Open			
J2	Open			
J3	Closed	Switchover		
J4	Open			
U1	A6986		ST	



# Revision history 2

Date	Rev	Changes
15-Jan-2015	1	First release.



#### **IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

