
# NC6-P108-04 - ACTIVE

### Buchanan | Buchanan NC6

TE Internal #: 3-1437664-3 Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 4 Position, 9.53 mm [.375 in] Centerline, 1 Row, Buchanan NC6 View on TE.com >



Connectors > Terminal Blocks & Strips > Barrier Strips

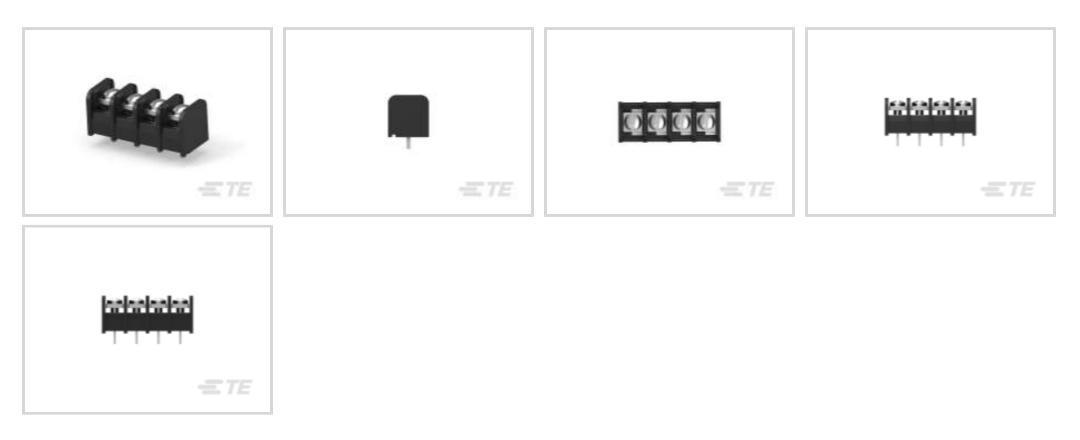

Barrier Strip Style: Dual Barrier

Bottom Termination Type: Printed Circuit Pin

Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 9.53 mm [.375 in ]

# Features

# Product Type Features

Block Style	Flat Bottom with standoffs	
Connector System	Wire-to-Board	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of Levels	1	
Number of Positions	4	
Number of Rows	1	
Electrical Characteristics		
	300 V	
Operating Voltage	300 V	
Operating Voltage Body Features	300 V	
	300 V Low	
Body Features		
Body Features Terminal Profile	Low	

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 4 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



# **Contact Features**

PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Copper Alloy	
Contact Current Rating (Max)	20 A	
Termination Features		
Bottom Termination Type	Printed Circuit Pin	
Mechanical Attachment		
Screw Head Type	Wire Clamp Combo Head	
Screw Plating Material	Zinc	
Screw Material	Steel	
Top Termination Type	Wire Clamp Combo Head	
Mounting Options	None	
Thread Size	6-32	
Connector Mounting Type	Board Mount	
Housing Features		
Housing Material	Polyamide	
Centerline (Pitch)	9.53 mm[.375 in]	

Dimensions	

Product Length	39.65 mm[1.561 in]	
Wire Size	.3 – 3 mm²	
Usage Conditions		
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]	
Operation/Application		
Circuit Application	Power	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	45	
Packaging Method	Package	
Other		
Terminal Blocks & Strips Comment	Do not order screw and captive clamp in combination with other top hardware.,	

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 4 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



Other options available upon request, consult our Product Information Center.

# **Product Compliance**

### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




# Also in the Series | Buchanan NC6

**C** For support call+1 800 522 6752

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 4 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



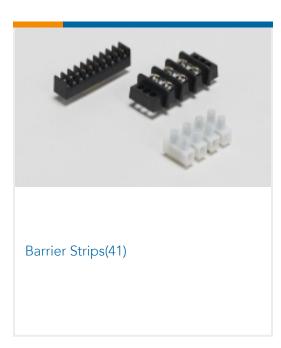

# Customers Also Bought



NC6-P108-08=NC6 ASSEMBLY	TERMI-BLOK PCB MOUNT 12P.5	SEAL RET, 12P, GRY, DTM, A	2P MTA100 HDR ASSY,SM,FL,LF
TE Part #3-1825033-1 DRW1604=Rot Dip,w/Wheel	TE Part #2-2176527-6 3503G 2B 1K0 1% 5K RL		

# Documents

Product Drawings NC6-P108-04=7180XX002/30

English

# **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_3-1437664-3\_M1.3d\_stp.zip

English

Customer View Model

**C** For support call+1 800 522 6752

Barrier Strips, Dual Barrier, Printed Circuit Pin, Wire-to-Board, 4 Position, 9.53 mm [. 375 in] Centerline, 1 Row, Buchanan NC6



### ENG\_CVM\_CVM\_3-1437664-3\_M1.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_3-1437664-3\_M1.3d\_igs.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS

English

1-1773458-2\_BARRIER\_STRIPS\_QUICK\_REFERENCE\_GUIDE

English