

EMC filters

3-line filters Sine-wave output filters 300/520 V AC; 400/690 V AC, 4 A ... 320 A, 40 °C

Series/Type: B84143V*R227 Date: January 2021

© TDK Electronics AG 2021. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without TDK Electronics' prior express consent is prohibited.



Output filters

Sine-wave output filters for 3-phase systems

Sine-wave output filters for 3-phase systems Rated voltage V_R : 300/520 V AC and 400/690 V AC Rated current I_R : 4 A to 320 A

Construction

3-line filters

Features

- Reduction of motor noise and eddy current losses
- Generation of sinusoidal phase-to-phase voltage with low ripple
- dv/dt reduction
- Easy to install
- Compact design
- Degree of protection¹): IP20 (4 A ... 50 A, 75 A) IP10 (66 A, 95 A) IP00 (132 A ... 320 A)
- Optimized for long motor cables²⁾
- Natural cooling
- Wiring between inverter and filter must be shorter than 10 meters!
- Up to 180 A: tube clip for convenient shield bonding
- UL approved insulation system class 155 (F)

Typical applications

- Frequency converters for motor drives, e.g.
 - elevators
 - pumps
 - traction and conveyer systems
 - HVAC systems (heating, ventilation and air conditioning)

Terminals

- Up to 180 A: Finger-safe terminals
- 250 A and 320 A: Busbars

Marking

Marking on component:

Manufacturer's logo, ordering code, rated voltage, rated current, rated motor frequency, rated switching frequency, rated temperature, climatic category, date code, approvals

Minimum data on packaging:

Manufacturer's logo, ordering code, quantity, date code

1) According to IEC 60529

Please read *Cautions and warnings* and *Important notes* at the end of this document.



Schematic picture


²⁾ The maximum permissible motor cable length depends on the application and must be checked.




Sine-wave output filters for 3-phase systems

Typical circuit diagrams

Filters for 4 A ... 33 A

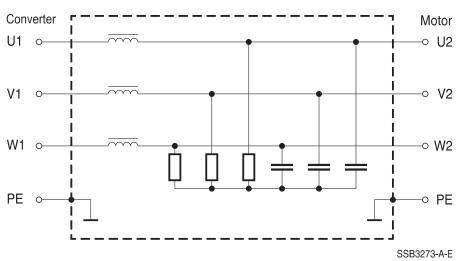

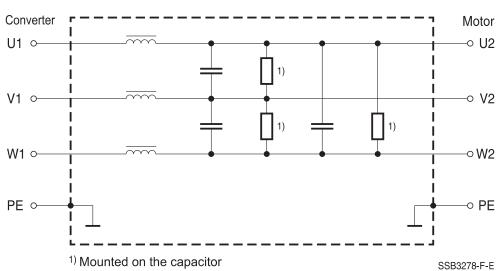

Filters for 50 A ... 320 A

B84143V*R227



Sine-wave output filters for 3-phase systems

B84143V*R227

Technical data and measuring conditions

Rated voltage V _R	Filters 4 A 132 A:	300/520 V AC (50/60 Hz)				
	Filters 180 A 320 A:	400/690 V AC (50/60 Hz)				
Rated current I _R	Referred to 40 °C rated temperature					
Test voltage V _{test}	1500 V DC, 2 s (line/line)					
	2500 V DC, 2 s (lines/case)					
Rated inductance L _R	See table "Characteristics and o	ordering codes"				
Rated capacitance C _R	Based on star connection indep	endent of the real used circuit;				
	see table "Characteristics and c	ordering codes"				
Converter output frequency f _M	0 100 Hz					
Pulse frequency f _P	See table "Characteristics and ordering codes"					
Overload capability (thermal)	1.5 · I _R for 1 min per hour					
Voltage drop ΔV (Input to	At I _R and 50 Hz					
output)						
Max. dv/dt on filter input	5 kV/μs (higher values can be a	pproved individually)				
Climatic category (IEC 60068-1)	Filters 4 A 33 A:	25/90/21				
	Filters 50 A 95 A:	25/55/21				
	Filters 132 A320 A:	25/70/21				
Insolation class	155 (F)					
Approvals	Insulation system class 155 (F)					

Characteristics and ordering codes

l _R *	Terminal cross	R _{typ}	L _R	C _R	ΔV	f _P ¹⁾	f _P	$P_L^{2)}$	Approx.	Ordering code
	section					min.	max.		weight	
А	mm ²	mΩ	mH	μF	%	kHz	kHz	W	kg	
$V_{R} = \xi$	520 V AC									
4	4	390	12.0	2.2	5	3	16	40	3.3	B84143V0004R227
6	4	290	8.5	2.2	5	3	16	45	3.5	B84143V0006R227
11	4	70	4.5	3.3	5	3	16	55	5.3	B84143V0011R227
16	6	37	3.0	5.6	7	3	10	60	8.5	B84143V0016R227
25	10	28	2.5	10	7	3	10	100	16	B84143V0025R227
33	10	20	1.8	10	8	3	10	150	20	B84143V0033R227
50	35	12	1.2	12	8	3	10	190	25	B84143V0050R227
66	35	9	0.95	18	8	3	8	250	26	B84143V0066R227
75	35	7	0.86	27	9	3	8	320	38	B84143V0075R227
95	35	6.3	0.75	27	10	3	8	330	52	B84143V0095R227
132	95	3.7	0.52	60	10	3	8	380	67	B84143V0132R227

* Higher current values upon request

1) For lower frequencies please contact TDK

2) Estimated losses at I_{R} and V_{R} when running with an inverter at f_{p} min



B84143V*R227


Sine-wave output filters for 3-phase systems

l _R *	Terminal cross	R _{typ}	L _R	C _R	ΔV	f _P ³⁾	f _P	$P_L^{4)}$	Approx.	Ordering code
	section					min.	max.		weight	
А	mm ²	mΩ	mH	μF	%	kHz	kHz	W	kg	
$V_{R} = 6$	$V_{\rm R} = 690 \text{ V AC}$									
180	95	3.8	0.40	90	10	3 ⁵⁾	6	480	74	B84143V0180R227
250	40 × 3	1.4	0.32	102	11	2.4	6	560	91	B84143V0250R227
320	40 × 3	1.2	0.25	167	11	2.4	6	750	145	B84143V0320R227

* Higher current values upon request

Dimensional drawings

B84143V0004R227 ... B84143V0011R227 (4 A ... 11 A)

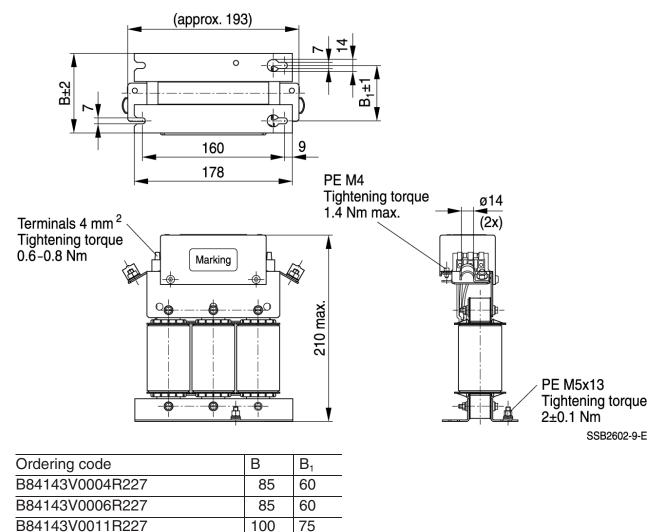

General tolerances according to ISO 2768-cL Dimensions in mm

3) For lower frequencies please contact TDK


- 4) Estimated losses at I_{R} and V_{R} when running with an inverter at f_{p} min
- 5) 4 kHz in case the filter is mounted vertically on the wall



Output filters


Sine-wave output filters for 3-phase systems

B84143V0016R227 (16 A)

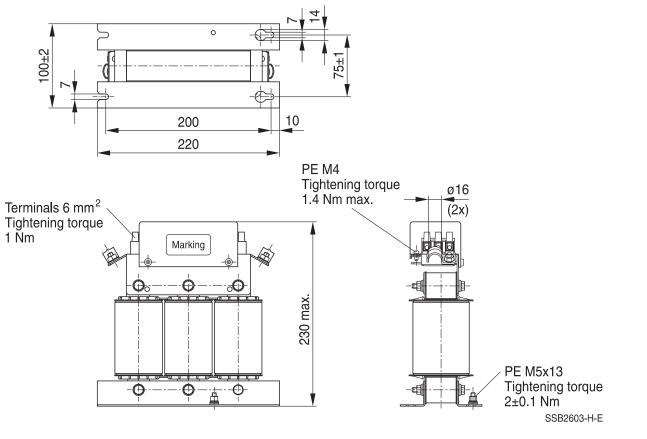



Sine-wave output filters for 3-phase systems

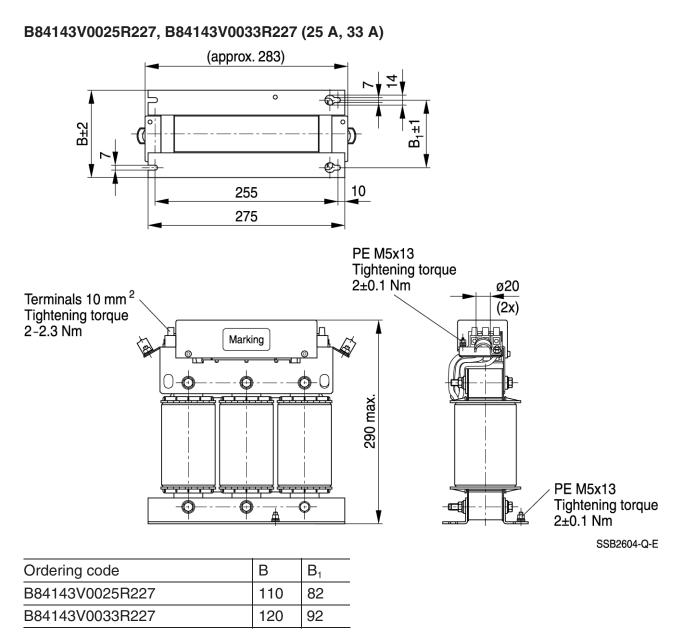




Output filters

Sine-wave output filters for 3-phase systems

B84143V0050R227 ... B84143V0075R227 (50 A ... 75 A)

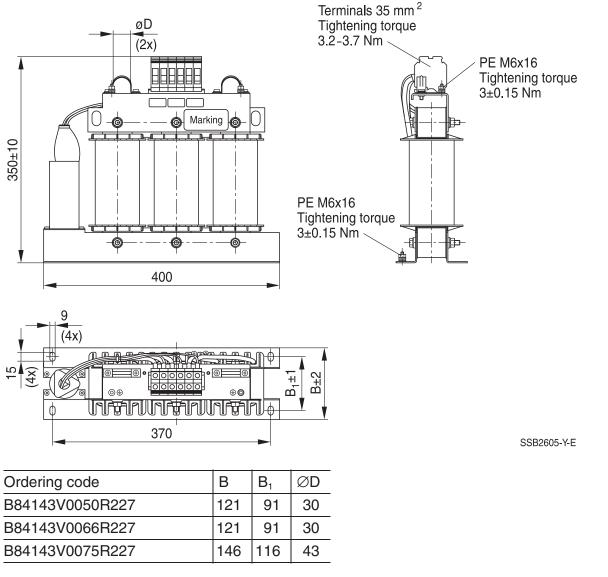




Output filters

Sine-wave output filters for 3-phase systems

B84143V0095R227 ... B84143V0180R227 (95 A ... 180 A)

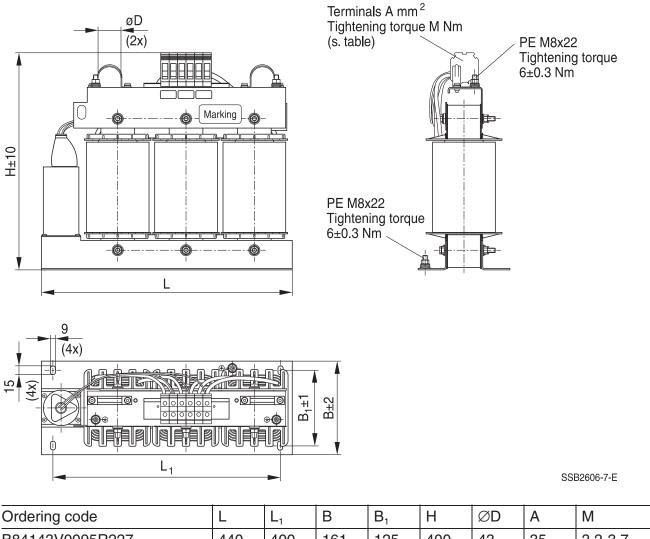


Ordering code	L	L ₁	В	B ₁	н	ØD	A	IVI
B84143V0095R227	440	400	161	125	400	43	35	3.2-3.7
B84143V0132R227	480	400	176	140	430	55	95	15-20
B84143V0180R227	500	460	191	155	430	55	95	15-20



Sine-wave output filters for 3-phase systems

B84143V0250R227 (250 A)

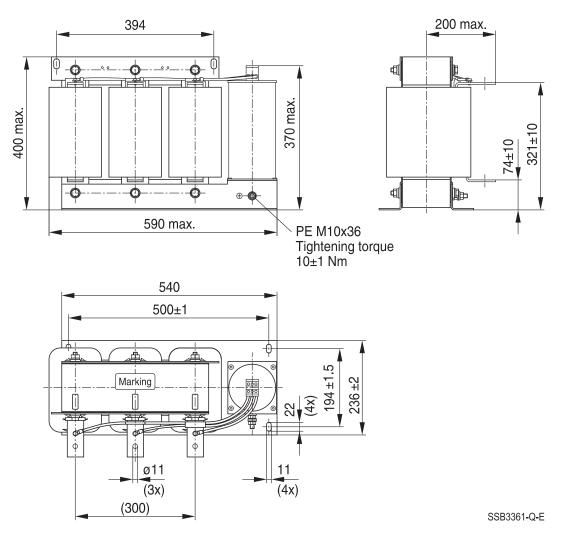




Output filters

Sine-wave output filters for 3-phase systems

B84143V0320R227 (320 A)

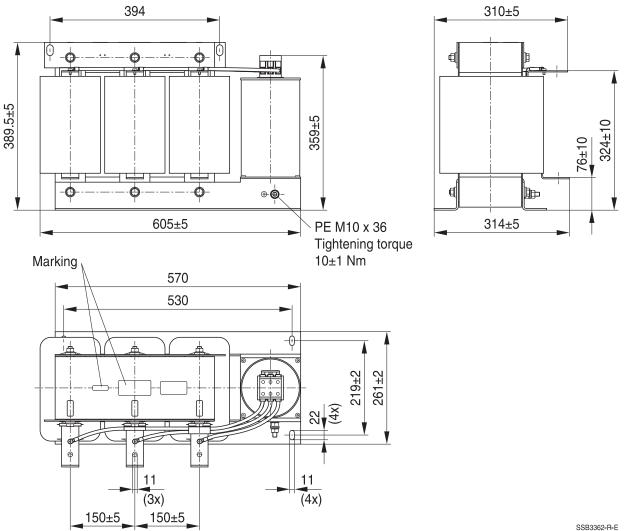

55B3362-H-E



Sine-wave output filters for 3-phase systems

Cautions and warnings

Please read all warning and safety notes carefully before installing the filter and putting it into operation (see \triangle). The same applies to the warning signs on the filter. Please ensure that the signs are not removed nor their legibility impaired by external influences.

Death, serious bodily injury and substantial material damage to equipment may occur if the appropriate safety measures are not carried out or the warnings in the text are not observed.

Using according to the terms

The filters may be used only for their intended application within the specified values in lowvoltage networks in compliance with the instructions given in the data sheets and the data book. The conditions at the place of application must comply with all specifications for the filter used.

Marning

- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. Filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective earth connection must be observed.
- Impermissible overloading of the filter or filter, such as with circuits able to cause resonances, impermissible voltages at higher frequencies etc. can lead to bodily injury and death as well as cause substantial material damages (e.g. destruction of the filter housing).
- Filters must be protected in the application against impermissible exceeding of the rated currents by overcurrent protective devices.
- In case of leakage currents >3.5 mA you shall mount the PE conductor stationary with the required cross section before beginning of operation and save it against disconnecting. For leakage currents I_L¹⁾ ≤10 mA the PE conductor must have a KU value²⁾ of 4.5³; for leakage currents I_L >10 mA the PE conductor must have a KU value of 6⁴).
- Output chokes and output filters must be protected in the application against impermissible exceeding of the component temperature.
- The converter output frequency must be within the specified range to avoid resonances and uncontrolled warming of the output chokes and output filters.
- Because the product can become very hot during operation, there is the risk of burns if touched. The product can remain hot for some time after the power is switched off!

- 2) The KU value (symbol KU) is a classification parameter of safety-referred failure types designed to ensure protection against hazardous body currents and excessive heating.
- A value of KU = 4.5 with respect to interruptions is attained with: a) permanently connected protective earth connection ≥1.5 mm² and b) a protective earth connection ≥2.5 mm² via connectors for industrial equipment (IEC 60309-2)
- 4) KU = 6 with respect to interruptions is achieved for fixed-connection lines $\geq 10 \text{ mm}^2$ where the type of connection and installation correspond to the requirements for PEN conductors as specified in relevant standards.

¹⁾ $I_L = leakage current let-go$



Sine-wave output filters for 3-phase systems

The table below summarizes the safety instructions that must be observed without fail. A detailed description can be found in the relevant chapters of the databook.

Торіс	Instructions	Reference chapter (data book), paragraph
Selecting a filter	When selecting a filter, it is mandatory to observe the rated data of the equipment (such as its rated input current, rated voltage, harmonic content etc.) as well as the derating instructions in Chapters 9 and 10.	Selection guide for converter filters
Rated voltage	When power distribution systems deviating from the symmetric TN-S system is to check the suitability of the filters and the allowed voltages including the fault cases.	Power distribution systems, 7
Protection from residual voltages Discharge resistors	Active parts must be discharged within 5 s to a voltage of less than 60 V (or 50 μ C). If this limit cannot be observed due to the operating mode, the hazardous point must be permanently marked in a clearly visible way.	
	Filters which are not permanently connected (e.g. when the test voltage is applied to the filter at the incoming goods inspection) must be discharged after the voltage has been switched off.	Safety regulations, 6.2
Installing and removing of filters Installation	When installing and removing our filters, a voltage-free state must be set up and secured with observance of the five safety rules described in EN 50110-1.	
Use in IT systems	The special features of the IT system ("first fault case" and other fault cases) shall be observed.	Power distribution system (network types), 7.6
Safety notes on leakage currents	The filter leakage currents specified in the data book are intended for user information only.The maximum leakage current of the entire electrical equipment or appliance has to be limited for safety reasons. Please obtain the applicable limits for your application from the relevant regulations, provisions and standards.	8.4 Leakage current,
Voltage derating	If the permissible limits for the higher-frequency	0
Hazards caused by overloading the filters	voltages at the filter are exeeded, the filter may be damaged or destroyed.	9.8
Current derating at elevated ambient temperatures	Non-observance of the current derating may lead to overheating and consequently represents a fire hazard.	-



B84143V*R227

Sine-wave output filters for 3-phase systems

Торіс	Instructions	Reference chapter (data book), paragraph
Protective earth connection at operating currents >250 A	For operating currents greater than 250 A, we recommend the PE connection to be set up between the feed (filter: line) and output (filter: load) not via the PE terminal bolt in the filter housing.	instructions,
Mounting position	Note the mounting position of the filters! It must always be ensured that natural convection is not impaired.	•
Long motor cables	Long motor cables cause parasitic currents in the installation. The cable lengths indicated for the output chokes and output filters serve for orientation. The user must check the technical parameters and especially the choke temperatures for the respective application.	Mounting instructions, point 15

Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.

Detailed information can be found on the Internet under www.tdk-electronics.tdk.com/orderingcodes.



Sine-wave output filters for 3-phase systems

Symbols and terms

Symbol	English	German
$\frac{1}{\alpha}$	Insertion loss	Einfügungsdämpfung
C _R	Rated capacitance	Bemessungskapazität
С _к	Capacitance X capacitor	Kapazität X-Kondensator
C _Y	Capacitance Y capacitor	Kapazität Y-Kondensator
ΔV	Voltage drop (input to output)	Spannungsabfall (Eingang zu Ausgang)
dv/dt	Rate of voltage rise	Spannungsanstiegsgeschwindigkeit
f	Frequency	Frequenz
f _M	Converter output frequency	Motorfrequenz
f _P	Pulse frequency	Pulsfrequenz
f _R	Rated frequency	Bemessungsfrequenz
f _{res}	Resonant frequency	Resonanzfrequenz
l _c	Current through capacitor	Strom durch Kondensator
I _{LK}	Filter leakage current	Filter-Ableitstrom
	Maximum current	Maximalstrom
I _{max} I _N	Nominal current	Nennstrom
	Operating current (design current)	Betriebsstrom
l _{op}	Rated peak withstand current	Bemessungs-Stoßstromfestigkeit
l _{pk}	Capacitive reactive current	Kapazitiver Blindstrom
l _q I_	Rated current	Bemessungsstrom
I _R I _S	Interference current	Störstrom
	Inductance	Induktivität
L _R	Rated inductance	Bemessungsinduktivität
L _{stray}	Stray inductance	Streuinduktivität
P_L	Power loss	Verlustleistung
R	Resistance	Widerstand
R _{is}	Insulation resistance	Isolationswiderstand
R _{typ}	DC resistance, typical value	Gleichstromwiderstand typisch
T _A	Ambient temperature	Umgebungstemperatur
T _{max}	Upper category temperature	Obere Kategorietemperatur
T _{min}	Lower category temperature	Untere Kategorietemperatur
T _B	Rated temperature	Bemessungstemperatur
U _k	Referred voltage drop in %	Bezogener Spannungsabfall in %
V_{eff}	RMS voltage	Effektivspannung
V _K	Voltage drop	Spannungsabfall
V_{LE}	Voltage line to earth; voltage line to ground	Spannung Phase zu Erdpotential
V _N	Nominal voltage	Nennspannung
V _R	Rated voltage	Bemessungsspannung
V_{peak}	Peak voltage	Spitzenspannung
V _{test}	Test voltage	Prüfspannung
V _X	Voltage over X capacitor	Spannung über X-Kondensator
V_{Y}	Voltage over Y capacitor	Spannung über Y-Kondensator
XL	Inductive reactance	Induktiver Blindwiderstand
Z	Impedance	Scheinwiderstand
Z	Impedance, absolute value	Scheinwiderstand (Betragswert)



The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- 6. Unless otherwise agreed in individual contracts, all orders are subject to our General Terms and Conditions of Supply.



Important notes

- 7. Our manufacturing sites serving the automotive business apply the IATF 16949 standard. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that only requirements mutually agreed upon can and will be implemented in our Quality Management System. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
- 8. The trade names EPCOS, CarXield, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, ModCap, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap, XieldCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2020-06