

Evil Mad Scientist Laboratories /

175 San Lazaro Ave., Ste. 150

evilmadscientist.com Sunnyvale CA 94086

Questions? Please contact us: sales@evilmadscientist.com

**DATASHEET** 



# The "Three Fives" Discrete 555 Timer

Kit version 2.0

Re-create one of the most classic, popular, and all-around useful chips of all time.


The "Three Fives" Discrete 555 Timer kit from Evil Mad Scientist Laboratories is faithful and functional transistor-scale replica of the classic NE555 timer integrated circuit.

Designed by Eric Schlaepfer (tubetime.us), in collaboration with Evil Mad Scientist Laboratories.


#### Main Specifications

- Kit type:Through-hole soldering kit
- · Assembly instructions: Printed, included with kit
- Assembly time: 30-60 minutes (typical)
- Function: Equivalent circuit to NE555 timer IC. Some performance characteristics differ; Refer to Abs. Maximum ratings and Electrical Characteristics
- RoHS compliance: All kit components are RoHS compliant (lead free)
- Connection methods: Terminal posts (bare wire, lug, or alligator clip) or solder

#### Block Diagram / Pinout

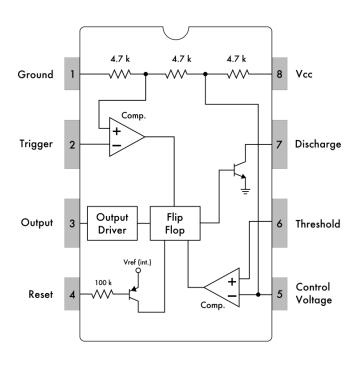

#### Kit Contents

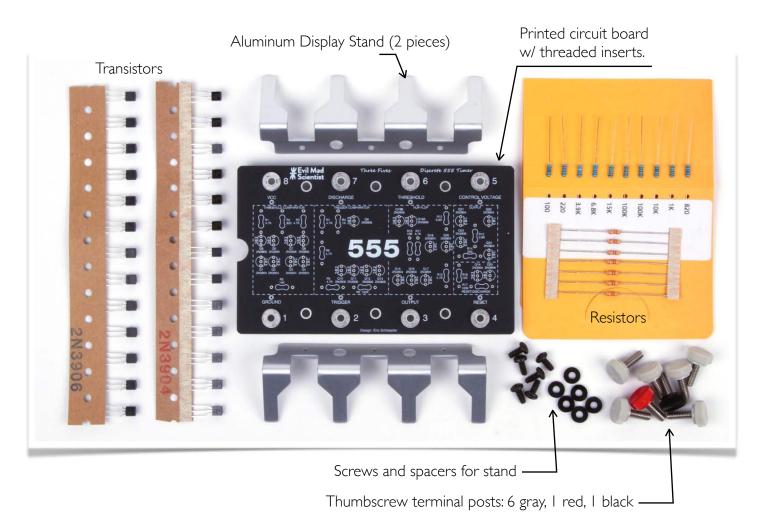


#### Contents of the Three Fives kit:

- The Three Fives printed circuit board (extra thick 0.100"), pre-fitted with eight 8-32 threaded inserts
- The transistors and resistors required to assemble the kit
- Eight thumbscrews (terminal posts) with color-coded caps (1 red, 1 black, 6 gray)
- Two-piece "IC Legs" stand, anodized aluminum
- Mounting screws and spacers for attaching the "IC Legs" stand
- Printed assembly instructions (not shown)

#### Tools and materials required for assembly (not included with kit):

- Soldering iron
- Solder
- Wire clippers
- Phillips head screwdriver (#2 size recommended).

## Schematic Diagram

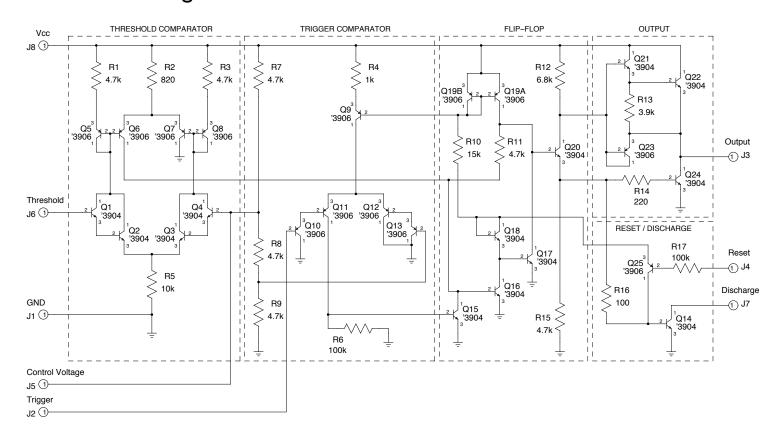

## **Electrical Components**


Reference	Qty	Туре	Value
Q1-4, Q14-18, Q20-22, Q24	13	NPN Transistor	2N3904
Q5-13, Q19A, Q19B, Q23, Q25	13	PNP Transistor	2N3906
RI, R3, R7, R8, R9, RII, RI5	7	Resistor, 1/4 W	4.7 k
R2	I	Resistor, 1/4 W	820
R4	I	Resistor, 1/4 W	l k
R5	I	Resistor, 1/4 W	10 k
R6, R17	I	Resistor, 1/4 W	100 k
R10	I	Resistor, 1/4 W	15 k
RI2	I	Resistor, 1/4 W	6.8 k
RI3	I	Resistor, 1/4 W	3.9 k
RI4	I	Resistor, 1/4 W	220
RI6	ı	Resistor, 1/4 W	100

## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	Vcc	18	V
Output current	lo	± 100	mA
Input voltage (Control Voltage, Threshold, Trigger, Reset pins)	V <sub>IN</sub>	V <sub>CC</sub> <sup>1</sup>	

#### Notes:

1. Exception for kit version 1.0 (without R17 and notch in PCB outline) only: Input voltage at reset pin ( $V_{RST}$ ) should be kept to lesser of  $V_{CC}$  or 6.6 V. For  $V_{CC} >$  6.6 V, Reset pin may be pulled up to Vcc through a 100 kilohm resistor.




## **Electrical Characteristics**

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Supply Voltage	V <sub>CC</sub>		4		18	V
Supply Current	Icc	V <sub>CC</sub> = 5 V, Low state		3		mA
		V <sub>CC</sub> = 15 V, Low state		10		
Threshold Voltage	V <sub>TH</sub>	V <sub>CC</sub> = 5 V		3.3		V
		V <sub>CC</sub> = 15 V	y	10.0		
Threshold Current	I <sub>TH</sub>			10		nA
Trigger Voltage	V <sub>TR</sub>	V <sub>CC</sub> = 5 V		1.67		V
		V <sub>CC</sub> = 15 V		5.0		
Trigger Current	I <sub>TR</sub>	TRIG at 0 V		10		nA
Reset Voltage <sup>1</sup>	V <sub>RST</sub>			0.4		V
Reset Current	I <sub>RST</sub>			0.2		mA
Control Voltage Level	V <sub>C</sub>	V <sub>CC</sub> = 5 V		3.33		V
Discharge Pin Leakage	lkg			1		nA
Discharge Pin Output Voltage Low	V <sub>DL</sub>	$V_{CC} = 5 \text{ V}, I_{O} = -5 \text{ mA}$		50		mV
Output Pin Voltage High <sup>2</sup>	V <sub>OH</sub>	V <sub>CC</sub> = 5 V, No load		4.5		V
		$V_{CC} = 5 \text{ V}, I_{O} = 100 \text{ mA}$		3.3		V
		V <sub>CC</sub> = 15 V, I <sub>O</sub> = 100 mA		13.3		V
Output Pin Voltage Low <sup>2</sup>	V <sub>OL</sub>	$V_{CC} = 5 \text{ V}, I_{O} = -5 \text{ mA}$		50		mV
	7	$V_{CC} = 5 \text{ V}, I_{O} = -8 \text{ mA}$		100		mV
		$V_{CC} = 15 \text{ V}, I_{O} = -10 \text{ mA}$		0.1		٧
		$V_{CC} = 15 \text{ V}, I_{O} = -50 \text{ mA}$		0.4		٧
		$V_{CC} = 15 \text{ V}, I_{O} = -100 \text{ mA}$		2.0		٧

#### Notes:

- Specified with trigger input high.
   For long term static operation, limit to 50 mA maximum.

## Printed Circuit Board: Physical layout and mounting holes

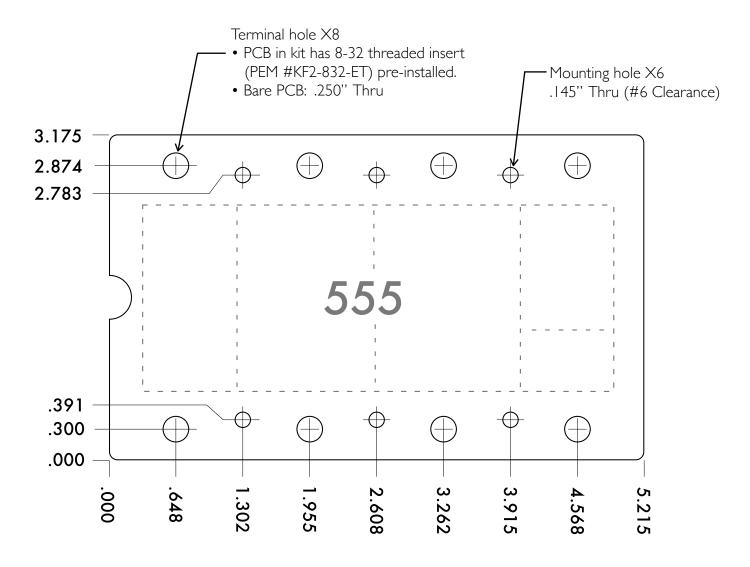


Note: All dimensions are in INCHES.

#### **Additional physical specifications:**

- Printed Circuit Board size: 5.215 X 3.175 inches (13.25 X 8.06 cm) wide
- PCB thickness: 0.100" (2.54 mm) nominal, not including threaded inserts
- PCB thickness: 0.196" (4.98 mm) nominal, including threaded inserts
- Overall thickness: Allow 0.5" min. clearance above and below circuit board
- Mounting holes: Six #6 clearance holes provided. See drawing for locations.
- Nominal height of "IC legs" stand: 1.25 inches (3.175 cm), not including spacers
- Nominal height of "IC legs" stand: 1.31 inches (3.33 cm), including spacers, to bottom of PCB.

### Additional Photos

Bare PCB

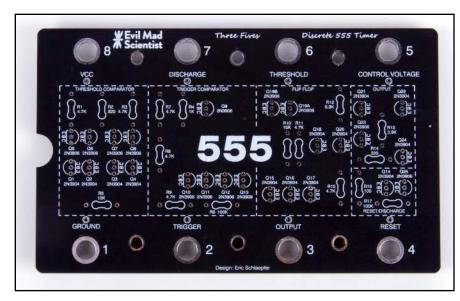




Assembled PCB with stand (Terminal posts removed)

Assembled kit with stand and terminal posts (top view)



## Suggested Circuits

#### LED flasher:

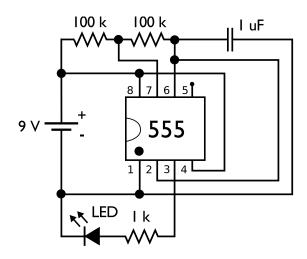

#### Variable-speed Larson Scanner

