



STEVAL-TDR021V1

Demonstration board using the PD84008L-E for 900 MHz 2-way radio

Features

- Excellent thermal stability
- Frequency: 740 - 950 MHz
- Supply voltage: 7.2 V
- Output power: 5 W
- Power gain: 11 ± 1.0 dB
- Efficiency: 48 % - 54%
- Load mismatch: infinite
- BeO free amplifier

Description

The STEVAL-TDR021V1 is a demonstration board using the PD84008L-E LDMOS transistor. It is designed for 2-way UHF portable radio applications.

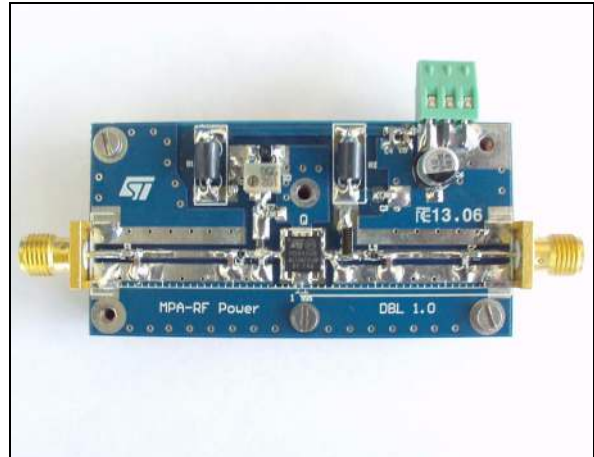


Table 1. Device summary

| Part number | Mechanical specification |
|-----------------|--------------------------|
| STEVAL-TDR021V1 | L = 60 mm, W = 30 mm |

Contents

| | | |
|---|---|----|
| 1 | Electrical characteristics | 3 |
| 2 | Impedance | 4 |
| 3 | Typical performance | 5 |
| 4 | Test circuit | 7 |
| 5 | Circuit layout | 9 |
| 6 | Revision history | 10 |

1 Electrical characteristics

$T_A = +25\text{ }^\circ\text{C}$, $V_{DD} = 7.5\text{ V}$, $I_{dq} = 50\text{ mA}$

Table 2. Electrical specification

| Symbol | Test conditions | Min. | Typ. | Max. | Unit |
|------------------|--|------|-----------|------|------|
| Freq | Frequency range | 740 | | 950 | MHz |
| P _{OUT} | | | 5 | | W |
| Gain | @ P _{IN} = 26 dB | | 11 ± 1.0 | | dB |
| ND | @ P _{IN} = 26 dB | | 49 - 54 | | % |
| H2 | 2 ND Harmonic @ P _{IN} = 26 dB | | -46 / -60 | | dBc |
| H3 | 3 RD Harmonic @ P _{IN} = 26 dB | | -54 / -60 | | dBc |
| VSWR | Load mismatch all phases @ P _{OUT} = 5 W | | Infinite | | |

2 Impedance

Figure 1. Impedance graphic

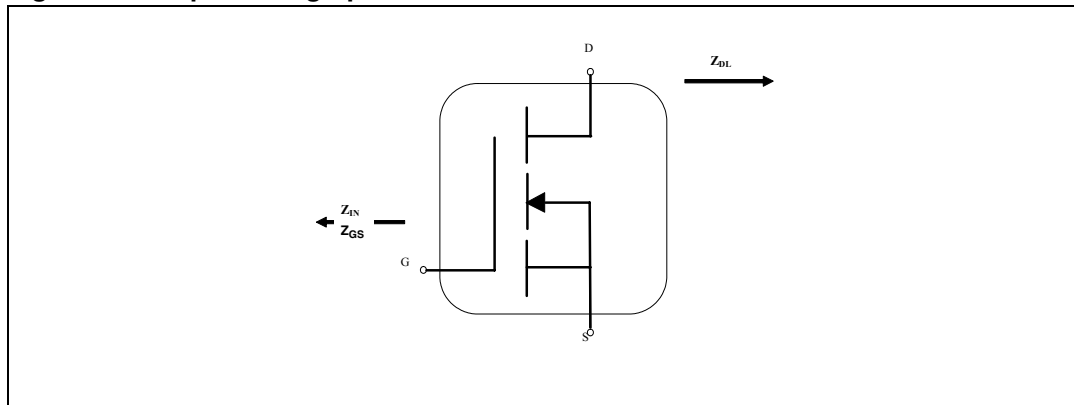


Table 3. Impedance data

| F (MHz) | Z_{GS} | Z_{DL} |
|---------|--------------|--------------|
| 740 | 1.87 - j5.74 | 3.04 - j6.19 |
| 750 | 1.84 - j5.65 | 3.10 - j6.13 |
| 760 | 1.83 - j5.55 | 3.17 - j6.09 |
| 770 | 1.81 - j5.43 | 3.26 - j6.04 |
| 780 | 1.79 - j5.30 | 3.35 - j5.60 |
| 790 | 1.74 - j5.19 | 3.43 - j5.98 |
| 800 | 1.70 - j5.13 | 3.51 - j6.02 |
| 810 | 1.67 - j5.05 | 3.61 - j6.09 |
| 820 | 1.68 - j4.97 | 3.70 - j6.20 |
| 830 | 1.69 - j4.89 | 3.82 - j6.32 |
| 840 | 1.69 - j4.80 | 3.91 - j6.48 |
| 850 | 1.68 - j4.72 | 3.94 - j6.70 |
| 860 | 1.67 - j4.68 | 3.90 - j6.96 |
| 870 | 1.66 - j4.61 | 3.82 - j7.22 |
| 880 | 1.66 - j4.54 | 3.67 - j7.48 |
| 890 | 1.66 - j4.48 | 3.47 - j7.65 |
| 900 | 1.61 - j4.37 | 3.17 - j7.74 |
| 910 | 1.54 - j4.26 | 2.85 - j7.79 |
| 920 | 1.48 - j4.18 | 2.48 - j7.81 |
| 930 | 1.43 - j4.12 | 2.12 - j7.77 |
| 940 | 1.36 - j4.04 | 1.77 - j7.67 |
| 950 | 1.33 - j3.98 | 1.49 - j7.51 |

3 Typical performance

Figure 2. Output power vs. frequency
 Vdd = 7.2 V - Idq = 200 mA

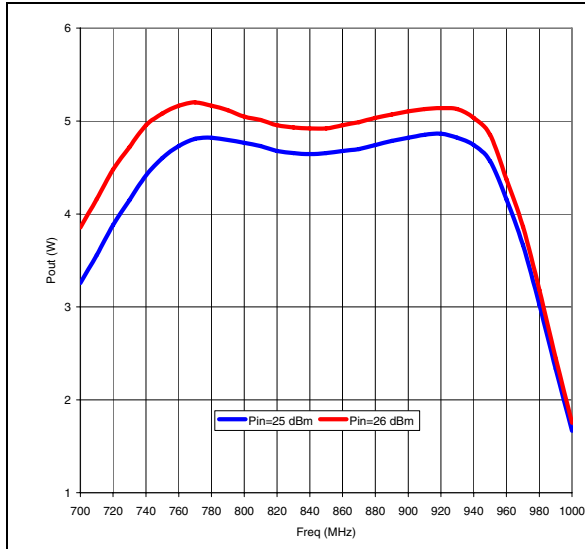


Figure 3. Gain vs. frequency
 Vdd = 7.2 V - Idq = 200 mA

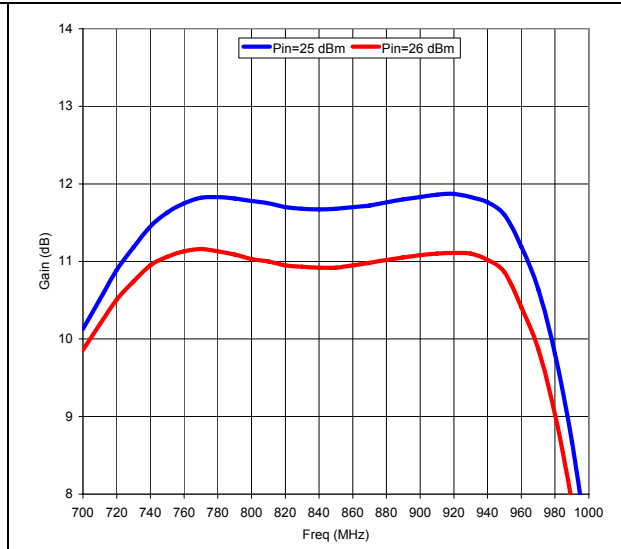


Figure 4. Input return loss vs. frequency
 Vdd = 7.2 V - Idq = 200 mA

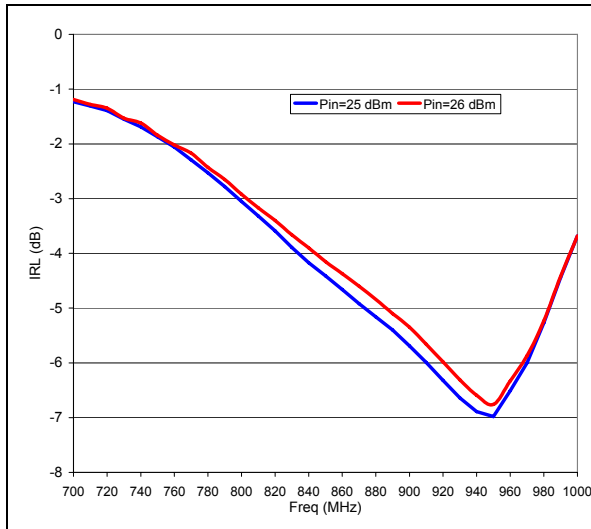


Figure 5. Efficiency vs. frequency
 Vdd = 7.2 V - Idq = 200 mA

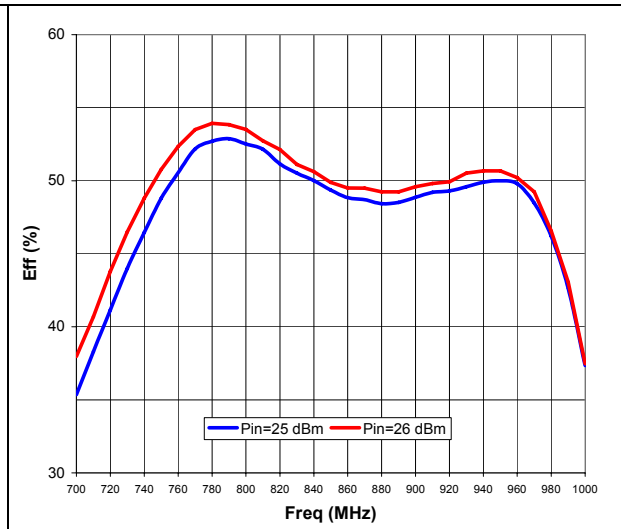


Figure 6. Gain vs. output
Vdd = 7.2 V - Idq = 200 mA


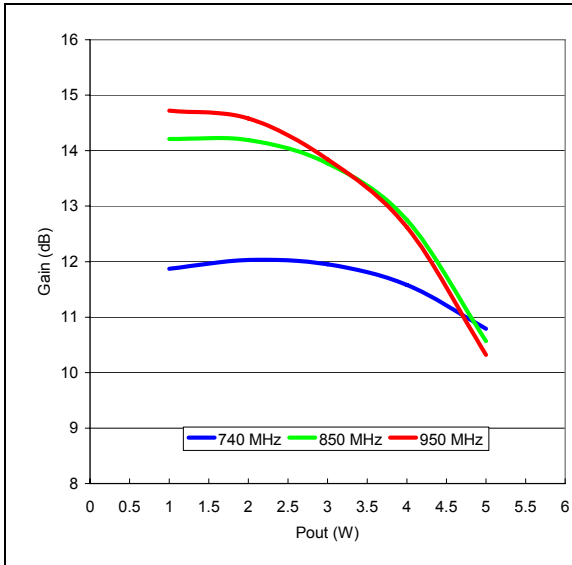


Figure 7. Harmonics vs. frequency Pin = 26 dBm Vdd = 7.2 V - Idq = 200 mA

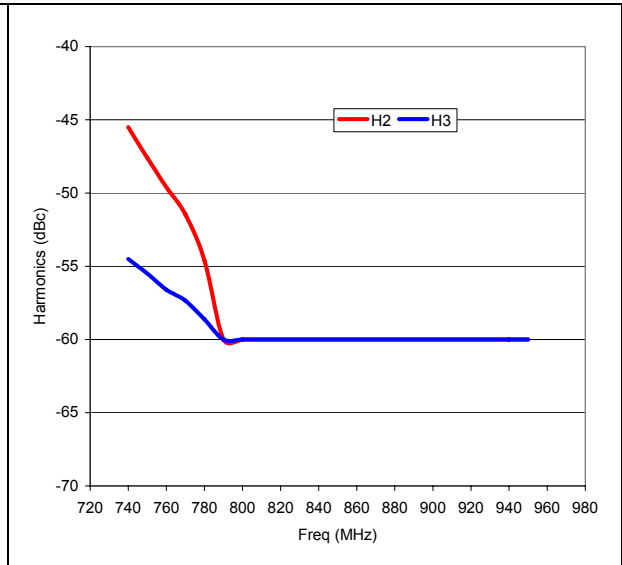

4 Test circuit

Figure 8. Test circuit schematic

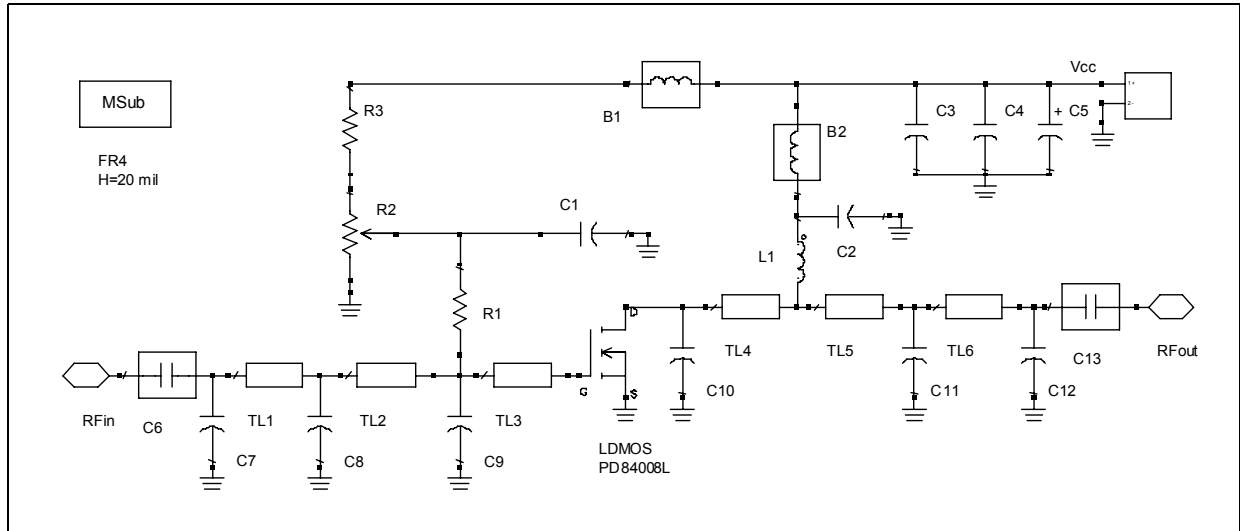


Table 4. Component part list


| Component ID | Description | Value | Case size | Manufacturer | Part code |
|--------------|---------------|--------------|-----------|--------------------|-----------------------|
| B1 | Ferrite bead | | | Panasonic | EXCELDRC35C |
| B2 | Ferrite bead | | | Panasonic | EXCELDRC35C |
| C1, C2 | Capacitor | 150 pF | 0603 | Murata | GRM39-C0G151J50D500 |
| C3 | Capacitor | 1 nF | 0603 | Murata | GRM39-COG102J50D500 |
| C4 | Capacitor | 10 nF | 0603 | Murata | GRM39-X7R103K50C560_ |
| C5 | Capacitor | 10 μ F | SMT | Panasonic | EEVHB1V100P |
| C6, C13 | Capacitor | 39 pF | 0603 | Murata | GRM39-C0G390J50D500 |
| C7, C8 | Capacitor | 3,9 pF | 0603 | Murata | GRM39-C0G3R9C50Z500 |
| C9, C10 | Capacitor | 18 pF | 0603 | Murata | GRQ706-C0G180J50K500 |
| C11 | Capacitor | 8.2 pF | 0603 | Murata | GRM39-C0G8R2D50Z500 |
| C12 | Capacitor | 2 pF | 0603 | Murata | GRQ706-C0G020C100K500 |
| L1 | Inductor | 12.55 nH | | Coilcraft | 1606-10 |
| R1 | Resistor | 510 Ω | 0603 | Tyco electronics | |
| R2 | Potentiometer | 1 k Ω | | Bourns electronics | 3224W-1-102 |

Table 4. Component part list (continued)

| Component ID | Description | Value | Case size | Manufacturer | Part code |
|---------------|-----------------------------------|--------------|-----------|--------------------|--------------|
| R3 | Resistor | 100 Ω | 0603 | Tyco electronics | 01623440-1 |
| TL1 | Transmission Line | W=0.92 mm | L=12,5 mm | | |
| TL2 | Transmission Line | W=0.92 mm | L=3,5 mm | | |
| TL3 | Transmission Line | W=0.92 mm | L=2,6 mm | | |
| TL4 | Transmission Line | W=0.92 mm | L=1,8 mm | | |
| TL5 | Transmission Line | W=0.92 mm | L=5,3 mm | | |
| TL6 | Transmission Line | W=0.92 mm | L=10.0 mm | | |
| RF in, RF out | SMA-CONN | 50 Ω | 60 mils | Johnson | 142-0701-801 |
| PD84008L-E | LDMOS | | | STMicroelectronics | PD84008L-E |
| Board | FR-4 THk=0.020" 2OZ Cu both sides | | | | |

5 Circuit layout

Figure 9. Circuit layout

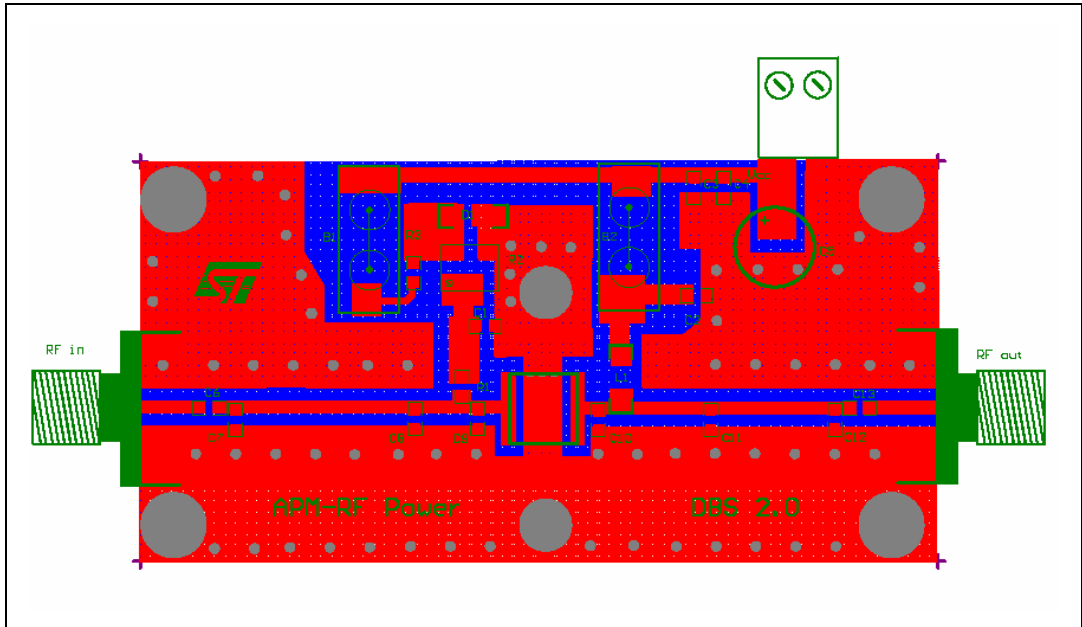

6 Revision history

Table 5. Document revision history

| Date | Revision | Changes |
|-------------|----------|-----------------|
| 14-Oct-2010 | 1 | Initial release |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

