

Barometric Pressure Unit

SKU:U090



Description

Barometric Pressure Unit is a barometer unit, which integrates the Bosch BMP280 pressure sensor to measure atmospheric pressure and estimate the altitude. The relative accuracy can reach $\pm 0.12\text{hPa}$, equivalent to $\pm 1\text{m}$ height difference. At the same time, the temperature drift coefficient is very low, which can reach 1.5 PA / K , that is, the temperature drift is 12.6 cm / K . In addition, there is an integrated temperature sensor in the chip.

Product Features

- Air pressure sensor, with temperature sensor on chip, can be measure simultaneously
- The accuracy is $\pm 0.12\text{hPa}$
- Temperature drift coefficient 1.5pa/k
- Supports periodic measurement
- Integrated 5-segment filter
- Support low power consumption
- Development platform: Arduino, UIFlow (Blockly, Python)
- 2x LEGO™ compatible holes

Include

- 1x Barometric Pressure Unit
- 1x Grove Cable (5cm)

Application

- height detector
- Weather station

Specification

Resources	Parameter
Air pressure measurement range	300 - 1100 hPa(+9000m ~ -500m)
Relative accuracy	0.12hPa
Absolute accuracy	1hPa
Temperature measurement range	-40 ~ +85°C
Temperature resolution	0.01°C
Pressure resolution	0.16Pa
Temperature coefficient offset	1.5 Pa/K(12.6 cm/K)

Temperature measurement onset	1.5 Pa/K(12.5 cm/K)
Current consumption	2.7μA @ 1 Hz sampling rate
Voltage	1.71V - 3.6V
Communication protocol	I2C: 0x76
Net Weight	8g
Gross Weight	21g
Produce Size	24*24*13mm
Package Size	35*36*18mm


EasyLoader

EasyLoader is a precise and fast program writer, which has a built-in case program related to the product. It can be burned to the main control by simple steps to perform a series of function verification. Please install the corresponding driver according to the device type. M5Core host (Please click here to view the CP210X driver installation tutorial, M5StickC/V/T/ATOM series can be used without driver)

Related Links

Datasheet
[BMP 280](#)

Schematic

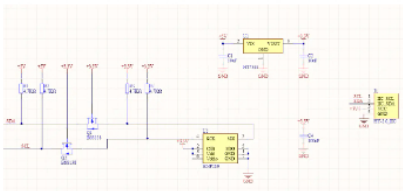

Pin Map

M5Core(GROVE A)	SCL	SDA	5V	GND
BMP Unit	GPIO22	GPIO21	5V	GND


Example

1. Arduino

[Click here to download the Arduino example](#)

2. UIFlow

[Click here to download the UIFlow example](#)

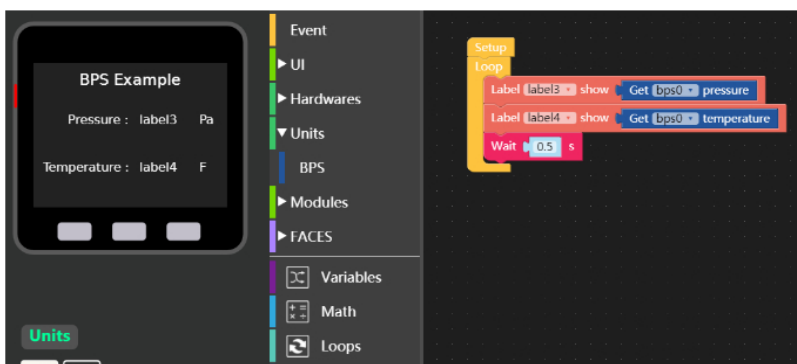



Logic

Graphic

Last updated: 2020-12-11

PURCHASE
