

Turnkey Pentium Pro¹ power supply specification

The new IRP6VRM1 offers the power supply designer a complete turnkey solution for DC/DC converters required to power next-generation microprocessors. A synchronous buck regulator topology operating at 200kHz is employed and achieves excellent efficiency with very fast load response and tight output voltage regulation.

The new FETKY™ D²Pak is used in the synchronous recirculation circuitry to reduce board space and assembly costs while actually improving circuit efficiency through reduced stray inductance. Complete performance characterization along with a detailed schematic, bill-of-materials, PCB layout and modeling are offered to reduce the customer's design time and effort.

Purpose

This is a production-ready design. It has been thoroughly tested for performance against the Intel P6 power specification, and evaluated for manufacturability by a high volume manufacturer.

This design will not be manufactured by International Rectifier. Its purpose is to simplify the design and qualification process for our customers.

Web Site

This design may be downloaded in two formats at IR's web site (<http://www.irf.com>). One is PDF format for on screen viewing or printing, the other is in native format.

Floppy Disk

The design is also available on floppy disk. As on our web site, the floppy version contains two formats, PDF and native format.

Demo Boards

Completed boards are available free to IR customers, and at a reasonable charge to others.

Support

E-mail Chris Davis at cdavis1@irf.com for support of this design.

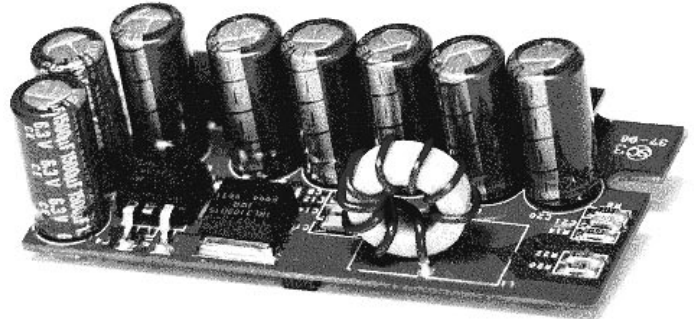


Figure 1. IRP6VRM1

Key Features

- Conforms to Intel 200Mhz P6 specification
- 12.4 ampere continuous output
- 2.0V-to-3.5V digitally selectable output
- 30A/μS transient load response capability
- Meets Pentium II power requirements
- Greater than 90% efficient
- Short circuit protected
- FETKY™ D²Pak synchronous rectifier
- Evaluation kit available: IRP6VRM1-EV

Contents

| | |
|-------------------------------|---|
| Specifications | 2 |
| Schematic Diagram | 3 |
| Bill of Materials | 4 |
| Inductor Specifications | 5 |
| Assembly Options | 5 |
| Static Performance | 5 |
| Dynamic Performance | 6 |

Copyright Restriction

This design may be used for production or evaluation purposes under the condition that all IR labeling and identification marks remain on all boards produced using this design, or as otherwise agreed to in writing by International Rectifier.

¹: A registered trademark of Intel Corporation

Specifications

Absolute maximum ratings (Table 1)

| Parameter | Min | Max | Units | Conditions / Description |
|---------------------------|-----|------|-------|-----------------------------------|
| 5 volt input | - | 6.0 | V | |
| 12 volt input | - | 15.0 | V | |
| Continuous output current | - | 12.4 | A | Pulse width > 100ms |
| Pulsed output current | - | 14 | A | 100ms pulse width, 1% duty factor |
| Ambient Temperature | 10 | 60 | °C | |

Electrical Input Specifications

| Parameter | Min | Typ | Max | Units | Conditions / Description |
|-----------------------|------|------|------|-------|----------------------------------------|
| 5 volt input (5Vin) | 4.75 | 5.0 | 5.25 | V | Supply meet all output specifications |
| 5 volt input current | - | - | 10 | A | All line and load conditions |
| 12 volt input (12Vin) | 11.8 | 12.0 | 13.2 | V | Supply meets all output specifications |
| 12 volt input current | - | 12.5 | 50 | mA | All line and load conditions |

Power Output Specifications (all specified line and load conditions)

| Parameter | Min | Typ | Max | Units | Conditions / Description |
|-----------------------|-----|-----|------|-------|------------------------------------------------------------------------------------------|
| Voltage Range | 2.0 | - | 3.5 | V | Selected by VID[0:3] |
| Current | 0 | - | 12.4 | A | |
| Voltage regulation | -5 | - | +5 | % | Of nominal VID set point. Includes 30A/us transients from min-to-max-to-min load current |
| Ripple voltage | -1 | - | +1 | % | Percent of set point. |
| Turn on settling time | - | 1.5 | 10 | mS | Within ±10% of VID set point |

Digital Input / Output Specifications

| Signal | Input / Output | Conditions / Description |
|----------|----------------|----------------------------------------------------------------------------------------------------------------------------|
| PWRGD | output | Open collector output. Logic 1 output signifies that the voltage output of the module is within ±10% of the selected level |
| OUTEN | input | Open collector input. Logic 0 disables the module output. |
| UP# | input | Open. Not required in this module since the module has upgrade capability. |
| VID[0:3] | input | Open collector input. Selects nominal output voltage as shown in table #2. |

Output Fault Protection

| Parameter | Min | Typ | Max | Units | Conditions / Description |
|--------------------------|-----|-----|-----|-------|--------------------------------------------------------------------------------------------|
| Short circuit protection | 13 | 17 | 21 | A | Limits output current during short circuit or overload |
| Over voltage protection | +10 | - | +20 | % | Shuts down the power supply when the output voltage exceeds 10%-to-20% above the set point |

VID Codes (Table 2)

| VccP | VID3 | VID2 | VID1 | VID0 | Comments |
|------|------|------|------|------|----------|
| 2.0 | 1 | 1 | 1 | 1 | No CPU |
| 2.1 | 1 | 1 | 1 | 0 | Optional |
| 2.2 | 1 | 1 | 0 | 1 | Optional |
| 2.3 | 1 | 1 | 0 | 0 | Optional |
| 2.4 | 1 | 0 | 1 | 1 | Optional |
| 2.5 | 1 | 0 | 1 | 0 | Optional |
| 2.6 | 1 | 0 | 0 | 1 | Optional |
| 2.7 | 1 | 0 | 0 | 0 | |
| 2.8 | 0 | 1 | 1 | 1 | |
| 2.9 | 0 | 1 | 1 | 0 | |
| 3.0 | 0 | 1 | 0 | 1 | |
| 3.1 | 0 | 1 | 0 | 0 | |
| 3.2 | 0 | 0 | 1 | 1 | |
| 3.3 | 0 | 0 | 1 | 0 | |
| 3.4 | 0 | 0 | 0 | 1 | |
| 3.5 | 0 | 0 | 0 | 0 | |

Fig 2. Connector pin out

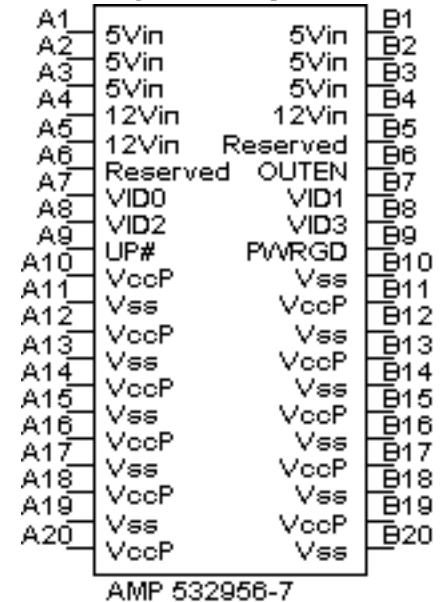


Fig 3. Silk screen top view



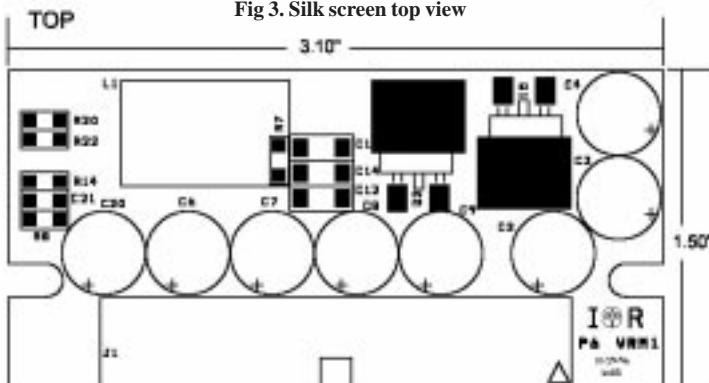


Fig 4. Silk screen bottom view

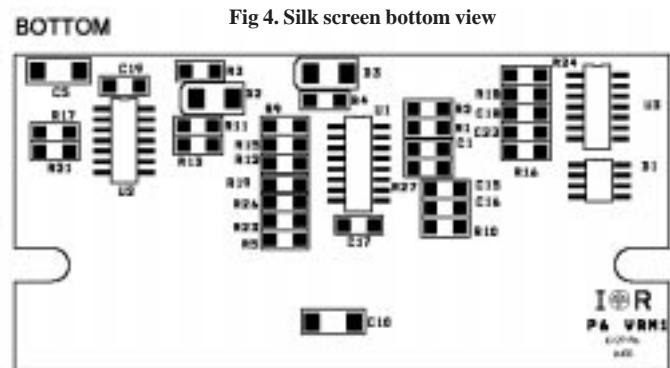

Schematic Diagram Fig. 5.

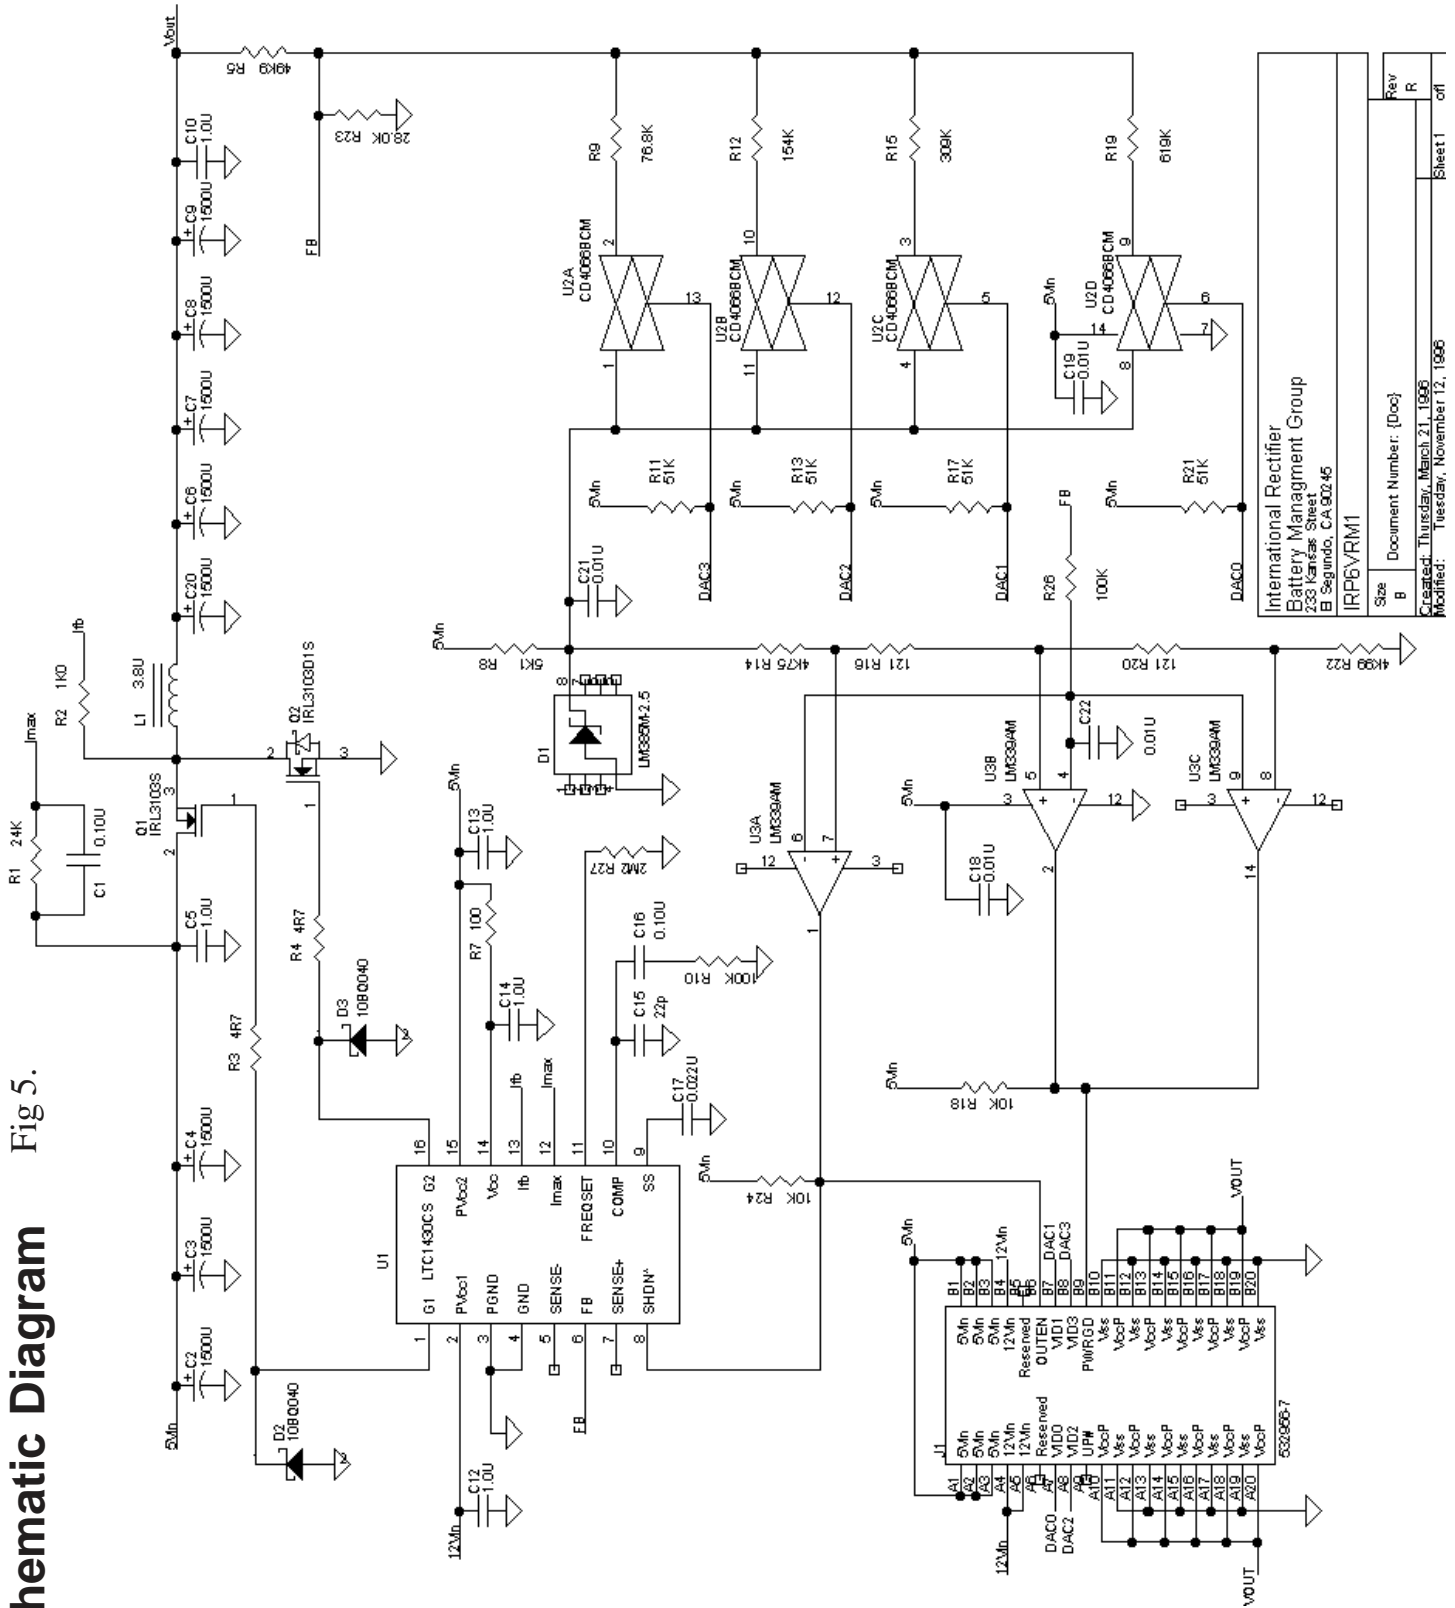

International Rectifier
Battery Management Group
233 Kankoa Street
B. Segundo, CA 90245
IRP6VRM1

| | | | |
|------|---|------------------|----------------------------|
| Size | B | Document Number: | {Doc} |
| Rev | R | Created: | Thursday, March 21, 1996 |
| | | Modified: | Tuesday, November 12, 1996 |

Sheet 1 of 1

4 Bill of Materials

(Table #3)

| Item | Qty | Reference | Part | Description | Manufacturer | Man PN | Vendor | Vend PN |
|------|-----|--------------------------|------------|--------------------------------------|-------------------------|---------------|---------------------|---------------|
| 1 | 2 | C1,C16 | 0.10U | 20% 1206 Z5U capacitor | Novacap | 1206Z104M500N | Garrett | 1206Z104M500N |
| 2 | 8 | C2,C3,C4,C6,C7,C8,C9,C20 | 1500U | Radial lead electrolytic capacitor | Sanyo | 6MV1500GX | Sanyo | 6MV1500GX |
| 3 | 5 | C5,C10,C12,C13,C14 | 1.0U | 20% 1808 Z5U capacitor | Novacap | 1808Z105M250N | Garrett | 1808Z105M250N |
| 4 | 1 | C15 | 22p | 5% 1206 NPO capacitor | Novacap | 1206N220J101N | Garrett | 1206N220J101N |
| 5 | 1 | C17 | 0.022U | 10% 1206 X7R capacitor | Novacap | 1206B223K500N | Garrett | 1206B223K500N |
| 6 | 4 | C18,C19,C21,C22 | 0.01U | 10% 1206 X7R capacitor | Novacap | 1206B103K500N | Garrett | 1206B103K500N |
| 7 | 1 | D1 | LM385M-2.5 | 2.5V S08 Precision shunt reference | National Semiconductor | LM385M-2.6 | Anthem | LM385M-2.5-ND |
| 8 | 2 | D2,D3 | 10BQ040 | 1A 40V SM schottky diode | International Rectifier | 10BQ040 | IR | 10BQ040 |
| 9 | 1 | J1 | 532956-7 | 40 Pin connector | AMP | 532956-7 | AMP | 532956-7 |
| 10 | 1 | L1 | 3.8U | 9t of 16g on Micrometals T60-52 core | Pacific Transformer | IR001 | Pacific Transformer | IR001 |
| 11 | 1 | Q1 | IRL3103S | N-Channel Power MOSFET | International Rectifier | IRL3103S | IR | IRL3103S |
| 12 | 1 | Q2 | IRL3103D1S | N-Channel Super FETKY | International Rectifier | IRL3103D1S | IR | IRL3103D1S |
| 13 | 1 | R1 | 24K | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ243V | Digi-Key | P24KETR-ND |
| 14 | 1 | R2 | 1K0 | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ102V | Digi-Key | P1.0KETR-ND |
| 15 | 2 | R4,R3 | 4R7 | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ4R7V | Digi-Key | P4R7ETR-ND |
| 16 | 1 | R5 | 49K9 | 1% 1206 Resistor | Panasonic | ERJ-8ENF4992V | Digi-Key | P49.9KFTR-ND |
| 17 | 1 | R7 | 100 | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ101V | Digi-Key | P100ETR-ND |
| 18 | 1 | R8 | 5K1 | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ512V | Digi-Key | P5.1KETR-ND |
| 19 | 1 | R9 | 76.8K | 1% 1206 Resistor | Panasonic | ERJ-8ENF7682V | Digi-Key | P76.8KFTR-ND |
| 20 | 2 | R26,R10 | 100K | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ104V | Digi-Key | P100KETR-ND |
| 21 | 4 | R11,R13,R17,R21 | 51K | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ511V | Digi-Key | P51KETR-ND |
| 22 | 1 | R12 | 154K | 1% 1206 Resistor | Panasonic | ERJ-8ENF1543V | Digi-Key | P154KFTR-ND |
| 23 | 1 | R14 | 4K75 | 1% 1206 Resistor | Panasonic | ERJ-8ENF4751V | Digi-Key | P4.75KFTR-ND |
| 24 | 1 | R15 | 309K | 1% 1206 Resistor | Panasonic | ERJ-8ENF3093V | Digi-Key | P309KFTR-ND |
| 25 | 2 | R16,R20 | 121 | 1% 1206 Resistor | Panasonic | ERJ-8ENF1210V | Digi-Key | P121FTR-ND |
| 26 | 2 | R18,R24 | 10K | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ103V | Digi-Key | P10KETR-ND |
| 27 | 1 | R19 | 619K | 1% 1206 Resistor | Panasonic | ERJ-8ENF6193V | Digi-Key | P619KFTR-ND |
| 28 | 1 | R22 | 4K99 | 1% 1206 Resistor | Panasonic | ERJ-8ENF4991V | Digi-Key | P4.99KFTR-ND |
| 29 | 1 | R23 | 28.0K | 1% 1206 Resistor | Panasonic | ERJ-8ENF2802V | Digi-Key | P28.0KFTR-ND |
| 30 | 1 | R27 | 2M2 | 5% 1206 Resistor | Panasonic | ERJ-8GEYJ225V | Digi-Key | P2.2METR-ND |
| 31 | 1 | U1 | LTC1430CS | Synchronous Buck Controller | Linear Technology | LTC1430CS | Linear Technology | LTC1430CS |
| 32 | 1 | U2 | CD4066BCM | Quad Bilateral Switch | National Semiconductor | CD4066BCM | Anthem | CD4066BCM-ND |
| 33 | 1 | U3 | LM339AM | Quad Comparator | National Semiconductor | LM339AM | Anthem | LM339AM |

Manufacturers

Novacap----- (800) 227-2447
 Panasonic----- (800) 922-0028
 National Semiconductor----- (800) 272-9959
 Linear Technology----- (714) 453-4650
 Micrometals Inc----- (714) 970-9400
International Rectifier----- (310) 322-3331
 AMP----- (800) 522-6752
 Sanyo----- (619) 661-6835

Distributors

Digi-Key----- (800) 344-4539
 Garrett----- (800) 767-0081
 Anthem----- (714) 768-4444

PCB Fabrication

South Coast Circuits----- (714) 966-2108

Turn Key Manufacturing

Corlund Electronics Corporation (805) 499-6877

Inductor Winding

Pacific Transformer----- (714) 779-0450

Delivery

Items used in this design were found to have production quantity lead times of under 10 weeks. Most were well under 8 weeks.

Inductor Specifications

Inductor Drawing

The specified inductor IR001, or optional IR002 can be purchased, assembled and tested (see BOM).

Fig 6. IR001

Core = Micrometals T60-52
Winding = 9 turns, 18 gauge, single layer
Finished OD = 0.800 MAX
Finished Height = 0.400 MAX
Leads extend 0.2" past OD, Stripped and tinned 0.2"

3.8uH Nominal @ 0A DC
2.5uH Nominal @ 14A DC



| | | |
|---------------------------------------------------------------------------------------------------|------------------------|-------|
| International Rectifier Battery Management Group 230 Kandler Street El Segundo, CA 90245 | | |
| 3.8uH, 12.4A inductor | | |
| Size A | Document Number: IR001 | Rev B |
| Created: Thursday, July 11, 1996 | | |
| Modified: Thursday, October 10, 1996 | | |
| | Sheet 1 | of 1 |

Fig 7. IR002

Core = Micrometals T60-52
Winding = 13 turns, 18 gauge, single layer
Finished OD = 0.800 MAX
Finished Height = 0.400 MAX
Leads extend 0.2" past OD, Stripped and tinned 0.2"

8.0uH Nominal @ 0A DC
5.5uH Nominal @ 8.6A DC



| | | |
|---------------------------------------------------------------------------------------------------|------------------------|-------|
| International Rectifier Battery Management Group 230 Kandler Street El Segundo, CA 90245 | | |
| 8.0uH, 8.6A inductor | | |
| Size A | Document Number: IR002 | Rev B |
| Created: Thursday, October 10, 1996 | | |
| Modified: Thursday, October 10, 1996 | | |
| | Sheet 1 | of 1 |

Assembly Options


Options For 8A Output (table #4)

| REF | From | To |
|--------|------------|---------------|
| C4 | 1500UF | Don't install |
| C6, C8 | 1500UF | Don't install |
| Q1 | IRL3103S | IRL3303S |
| Q2 | IRL3103D1S | IRL3303S |
| L1 | IR001 | IR002 |

8 Ampere Design Adaptation


Many motherboards do not require the full 12.4 ampere current output. In this case the IRP6VRM1 can be adapted to lower current levels by using the assembly options shown. These options will reduce cost by removing components and by using smaller die size MOSFETs. Substitution of a MOSFET for a FETKY will reduce efficiency somewhat, but junction temperatures will still remain well within a safe limit.

Fig 8. Typical T_j of Q1 @ $T_a = 50^\circ\text{C}$, still air

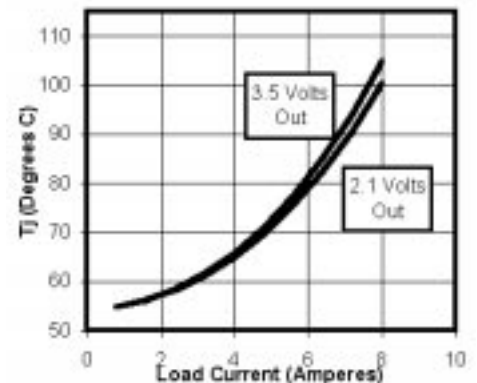

Static Performance

Fig 9. Average Efficiency

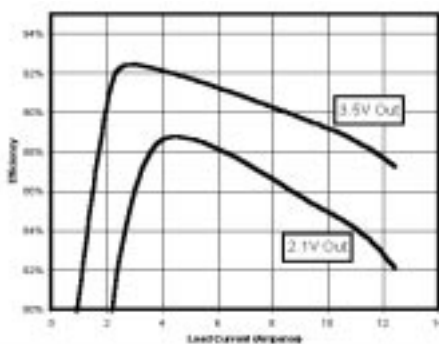


Efficiency

Efficiency is required to be at least 80% at full load. Thanks to the very efficient IRL3103S and the FETKY IRL3103D1S, IRP6VRM1 exceeds the required specification by a wide margin.

Maximum Junction Temperature


Analysis of Q1 junction temperature shows that it remains within specifications at an ambient temperature of 50°C , even in still air.

Fig 10. Typical T_j of Q1 @ $T_a = 50^\circ\text{C}$, still air

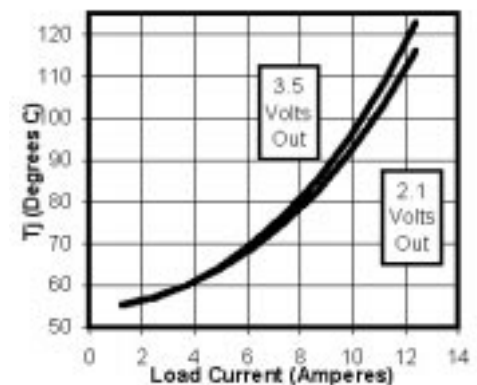

Dynamic Performance

Fig 11. Load Regulation, 2.1 Volts Out

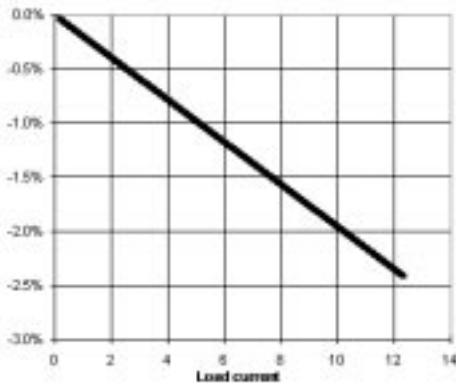

Load Regulation

The output must stay within its +5% specification from no load to full load.

Fig 12. Load Regulation, 3.5 Volts Out


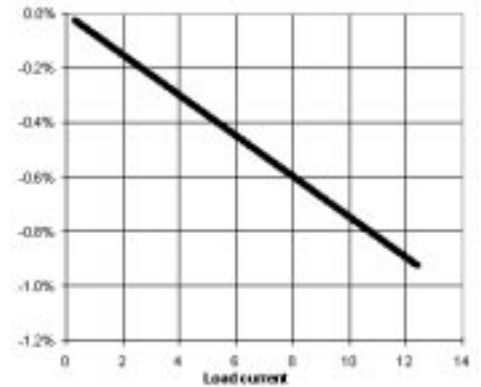


Fig 13. Transient Load Current Rise Time

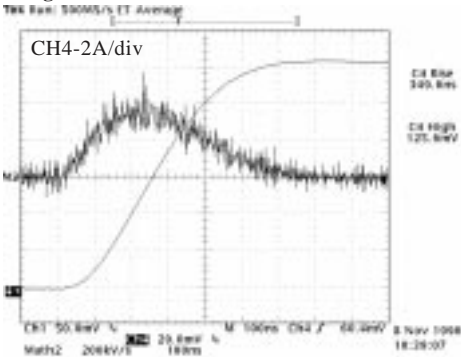

Transient Load Test Conditions

The Intel specification requires the supply to stay within its $\pm 5\%$ specification during transient load event of 0.3A-to-12.4A in 413ns. Although most motherboards do not require this full level of performance, the IRP6VRM1 meets the full transient response specification.

Fig 14. Transient Load Current Fall time


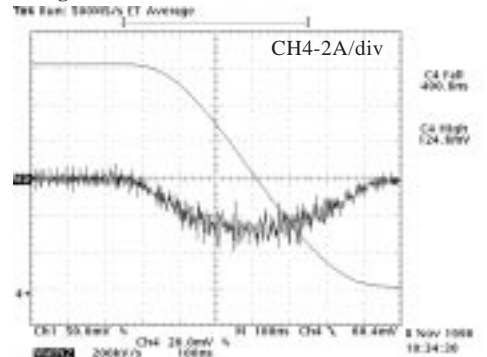


Fig 15. 100 Hz 3.5 Volts Output

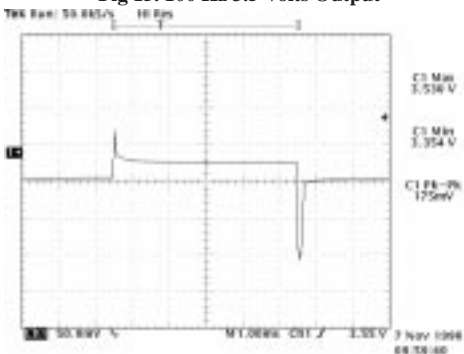


Transient Load At 3.5V Out

Performance at 100kHz is dominated by stray output inductance. This inductance is a combination of output capacitor ESL and board / connector inductance. Performance at 100Hz is dominated by loop characteristics.


| | Limit | 100Hz | 100kHz |
|-----|-------|-------|--------|
| Min | 3.325 | 3.354 | 3.351 |
| Max | 3.675 | 3.530 | 3.519 |

Fig 16. 100 kHz 3.5 Volts Output

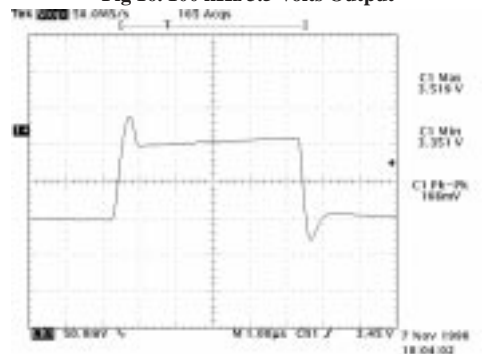

Dynamic Performance (continued)

Fig 17. 100Hz 2.1 Volts Output

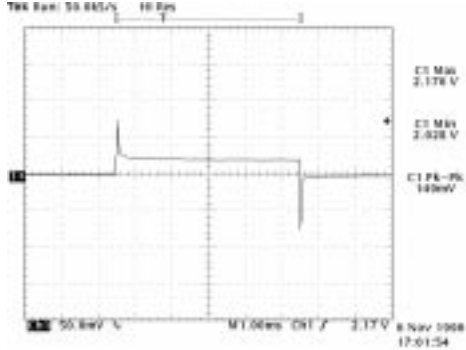

Transient Load At 2.1V Out

Performance at 2.1 volts out is very similar to that at 3.5 volts. The notable exception is a reduction of the negative spike at the current rising edge. This is due to having more average voltage available to change the current in L1.

| | Limit | 100Hz | 100kHz |
|-----|-------|-------|--------|
| Min | 1.995 | 2.028 | 2.004 |
| Max | 2.205 | 2.176 | 2.163 |

Fig 18. 100kHz 2.1 Volts Output


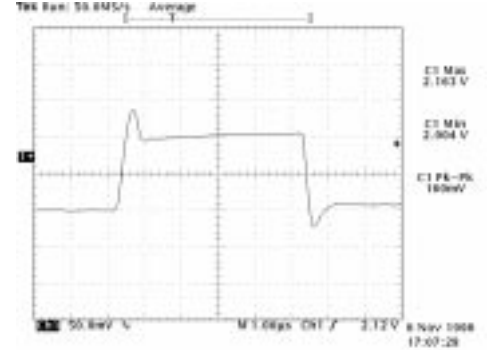


Fig 19. Turn On Input Current Waveform

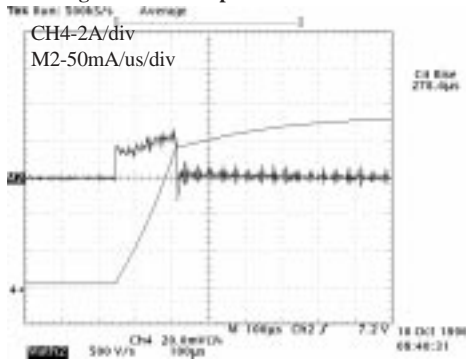


Input di/dt During Transient Load

The Intel guideline (optional) specification calls for a maximum input di/dt during transient load of 0.1A/μs. The IRP6VRM1 readily meets this specification at turn on, but falls short at turn off.


This is common to all VRM boards evaluated by IR, regardless of manufacturer. It should not cause difficulties for most users, but if it is an issue for your design, add input inductance.

Fig 20. Falling Input Current Waveform

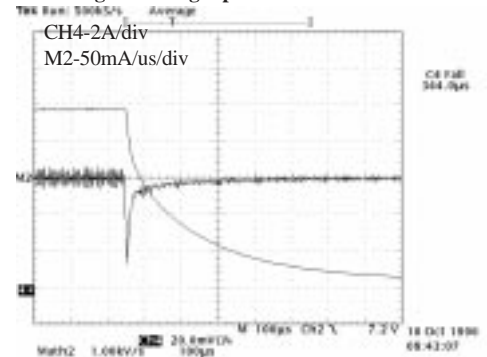

Dynamic Performance (continued)

Fig 21. 2.1 Volts Out, No Load

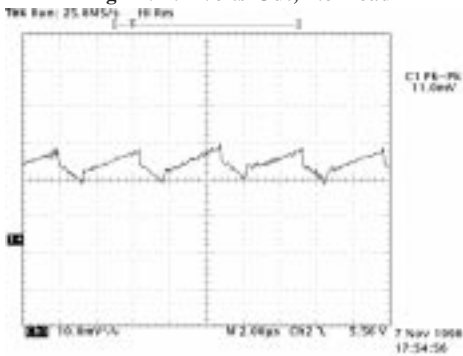

Output Ripple Voltage

Output ripple voltage is specified as a maximum 2% p-p.

| Out | Limit | Measured |
|------|-------|----------|
| 2.1V | 42mV | 11mV |
| 3.5V | 70mV | 16mV |

Fig 22. 3.5 Volts Out, Full Load


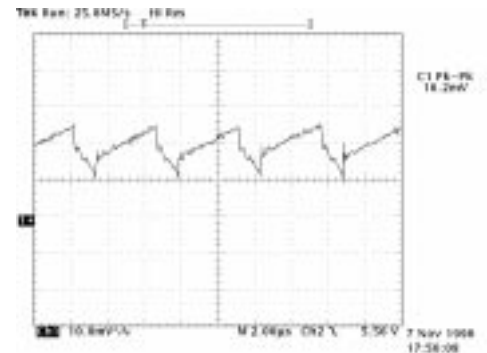


Fig 23. Turn on Waveform, 2.1 Volts Out

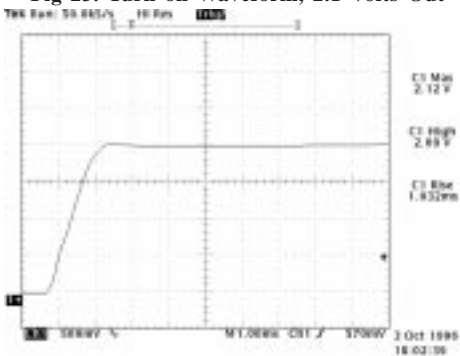

Turn On Transient

Output voltage must remain within 10% of the nominal set point.

| Out | Limit | Measured |
|------|-------|----------|
| 2.1V | 2.31 | 2.12 |
| 3.5V | 3.85 | 3.84 |

Fig 24. Turn on Waveform, 3.5 Volts Out

