


Data sheet | Item number: 288-808

stabilized power supply; Input voltage: 230 VAC; 12 VDC output voltage; 0.5 A output current; in mounting carrier; 2,50 mm²



www.wago.com/288-808

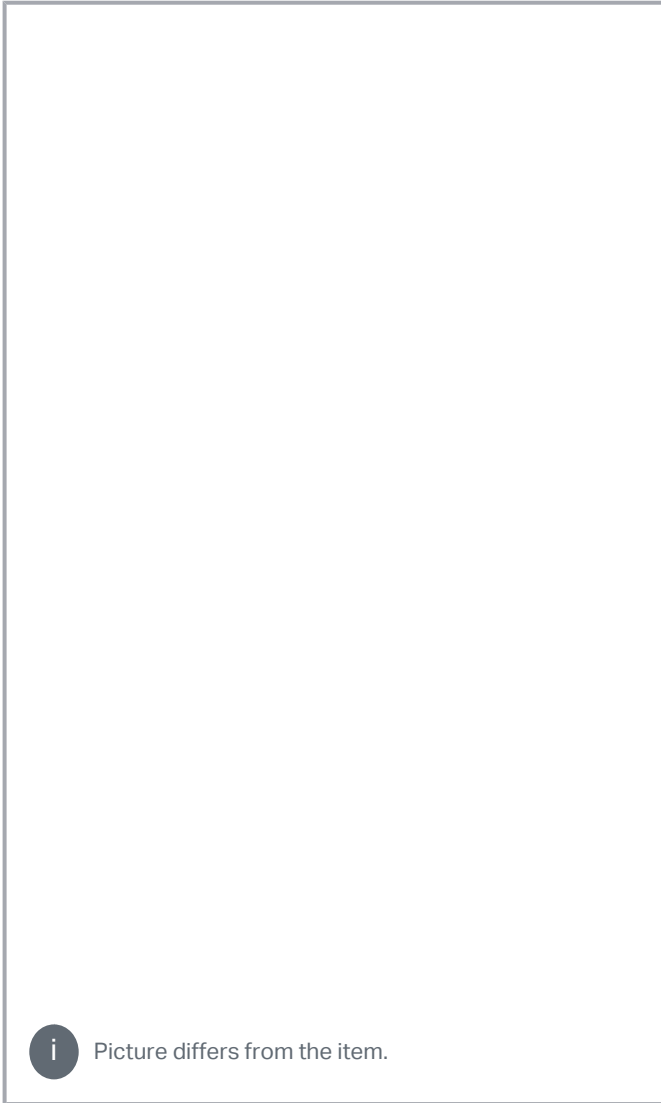

Data

Technical data

Input

Phases	1
--------	---

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Nominal input voltage $U_{i\text{nom}}$	1 x AC 230 V
Input voltage range	$\pm 10\%$
Nominal mains frequency range	50 ... 60 Hz

Output

Nominal output voltage $U_{o\text{nom}}$	DC 12 V
Output voltage range	$\pm 4\%$
Nominal output current $I_{o\text{nom}}$	0.5 A
Residual ripple	$\leq 10\text{ mV}$ (peak-to-peak)

Efficiency/power losses

Power loss (max.) $P_{l(\text{max.})}$	23 W
--	------

Circuit protection

Internal fuse	T 0.8 A
---------------	---------

Safety and protection

Protection class	II
Protection type	IP00; per EN 60529
Pollution degree	2
Series operation	No

Connection data

Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

Physical data

Width	77 mm / 3.031 inches
Height	106 mm / 4.173 inches
Depth from upper-edge of DIN-rail	52 mm / 2.047 inches

Subject to changes. Please also observe the further product documentation!



Mechanical Data

Housing design	Mounting carrier
Mounting type	DIN-35 rail

Material Data

Fire load	6.422 MJ
Weight	560 g

Environmental requirements

Ambient temperature (operation)	0 ... +50 °C
---------------------------------	--------------

Standards and specifications

Conformity marking	CE
--------------------	----

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	3 (1) pcs
Packaging type	box
Country of origin	DE
GTIN	4050821168614
Customs tariff number	85044083900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I
SCIP notification number (Austria)	c9c713b3-614f-4cc8-8e12-03b56e03c379
SCIP notification number (Belgium)	d29e62d1-0a2a-457f-ba1f-3f7aeae03a5d
SCIP notification number (Bulgaria)	4f0f061e-8a96-4070-8fe2-ec2a32bb13e4

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Czech Republic)	157997a7-d730-474e-b608-14067c37404a
SCIP notification number (Denmark)	8bfa2ce9-7451-472a-8bb1-80eb30992ea8
SCIP notification number (Finland)	0c7ba7fc-79a1-401d-affe-f7cad609aed5
SCIP notification number (France)	482f0351-2806-471f-b7d2-0610a4c70898
SCIP notification number (Germany)	5f3fc8ac-b439-4609-a12f-244f6e92d36b
SCIP notification number (Hungary)	3f18c326-1fbc-4228-a30d-54a23d481701
SCIP notification number (Italy)	a49788ba-4bf2-4a4d-abf3-d73fa539d7b1
SCIP notification number (Netherlands)	334fb5a1-99be-45ca-a0ad-54669b2a86c2
SCIP notification number (Poland)	b29ce093-5376-4827-acd8-5bc3edea026e
SCIP notification number (Romania)	a5eb8ffb-eed5-485f-94c6-9ca02ab11270
SCIP notification number (Sweden)	7b7e8da9-ee5e-4ff3-b5e2-9fd74b5ae48f

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19

Optional accessories

Marking accessories

Marking strip	
Item no.: 210-831 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white	www.wago.com/210-831
Item no.: 210-832 Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white	www.wago.com/210-832
Item no.: 709-196 Marking strips; for laser printer; translucent	www.wago.com/709-196
Item no.: 709-178 Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white	www.wago.com/709-178
Item no.: 709-177 Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent	www.wago.com/709-177

Tool

Operating tool	
Item no.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured	www.wago.com/210-720

Subject to changes. Please also observe the further product documentation!



Downloads Documentation

Bid Text

288-808 X81 - Datei	2019 年2月19 日	xml 3.7 kB	Download
------------------------	--------------	---------------	----------

288-808 doc - Datei	2015 年2月6 日	doc 26.6 kB	Download
------------------------	-------------	----------------	----------

Instruction Leaflet

		pdf 1.3 MB	Download
--	--	---------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 年8月18 日	pdf 2.2 MB	Download
---	-------------------------	---------------	----------

CAD/CAE-Data

CAE data

EPLAN Data Portal 288-808		URL	Download
---------------------------	--	-----	----------

WSCAD Universe 288-808		URL	Download
------------------------	--	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 288-808 stabilized power supply; Input voltage: 230 VAC; 12 VDC output voltage; 0.5 A output current; in mounting carrier; 2,50 mm ²		URL	Download
---	--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!