

# PA32-32(Z) Data Sheet

## 32 pin PLCC socket/32 pin DIP 0.6" plug

### Supported Device/Footprints


This adapter allows programming of many 32 pin PLCC, CLCC and LCC devices in their 32 pin DIP footprint.

The CLCC package has J leads. The LCC package is leadless. Both packages are ceramic. The LCC package is supported by the PA32-32Z when a shim is used. See the LCC Package Support section.


The following devices are supported using the indicated footprint.  
**Generic:** 27x010, 27x020, 27x040, 27x080, 27x101, 27x201, 27x401, 29F100

**Footprint:** Same device 32DIP 0.6"

### Adapter Dimensions

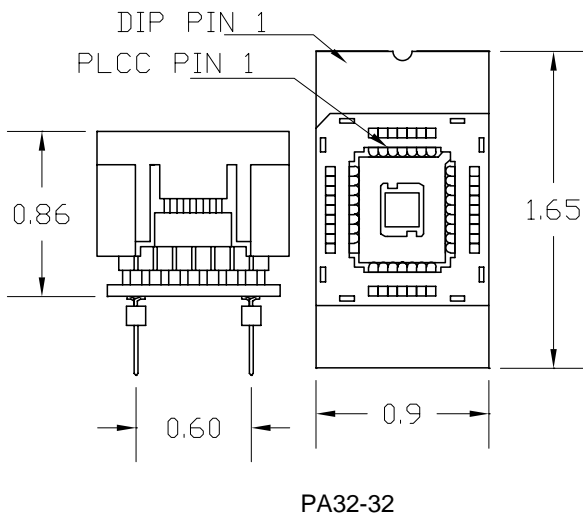

PA32-32

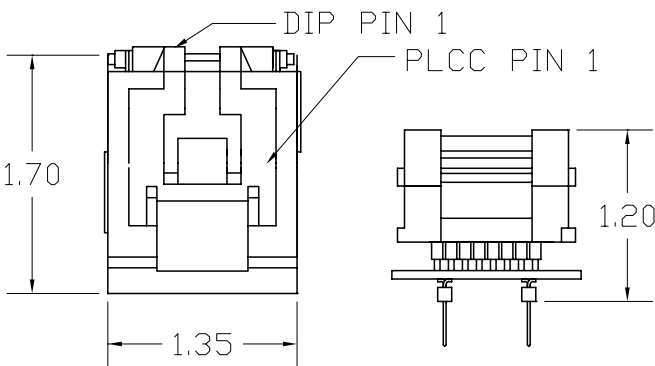

PA32-32Z

### Adapter Construction

The adapter is made up of 2 sub-assemblies. They assemble via connectors making the adapter modular. This way the sub-assemblies can be replaced when they wear out.

When disassembling the adapter take care not to bend the pins. When reassembling the adapter note the pin 1 indicators to align the parts correctly.

The following chart shows the various socket and board part numbers that make up these adapters.

| Adapter  | Socket | Board          |
|----------|--------|----------------|
| PA32-32  | 32-309 | PA32-32 Ver D  |
| PA32-32Z | 32-453 | PA32-32Z Ver C |

### Test Sockets

| LSC #  | Style      | Mfgr/Pn                 |
|--------|------------|-------------------------|
| 32-309 | Auto-Eject | Yamaichi IC120-0324-309 |
| 32-453 | Lidded ZIF | Yamaichi IC51-0324-453  |

### Adapter Wiring

This adapter is wired 1 to 1. The following chart shows the connections from the PLCC device to the adapters DIP plug.

| DEVICE | PLUG | PLUG | DEVICE |
|--------|------|------|--------|
| 1      | 1    | 32   | 32     |
| 2      | 2    | 31   | 31     |
| 3      | 3    | 30   | 30     |
| 4      | 4    | 29   | 29     |
| 5      | 5    | 28   | 28     |
| 6      | 6    | 27   | 27     |
| 7      | 7    | 26   | 26     |
| 8      | 8    | 25   | 25     |
| 9      | 9    | 24   | 24     |
| 10     | 10   | 23   | 23     |
| 11     | 11   | 22   | 22     |
| 12     | 12   | 21   | 21     |
| 13     | 13   | 20   | 20     |
| 14     | 14   | 19   | 19     |
| 15     | 15   | 18   | 18     |
| 16     | 16   | 17   | 17     |

### LCC (Leadless) package support

The test socket on the PA32-32Z can accommodate the LCC package. A shim must be used to make up the difference in thickness between the PLCC and LCC packages. The shim can be ordered using part number **SHIM32-453** or it can be made.

The shim should be between 0.023" and 0.030" thick and cut to a size of 3/8" by 5/8". It should be affixed to the inside of the cover of the socket. Test close the socket, without a device, to confirm the shim does not interfere with the interlocking parts of the socket.