

#### AMP SMA

TE Internal #: 1-1478904-0 SMA RF Interface, Plug, 50 Ω, RG 405, Screw, 18 GHz Operating Frequency, Cable-to-Board, 1 Position, Sealable, Wire & Cable, Panel Mount, AMP SMA

View on TE.com >

Connectors > RF Connectors > Coax Connectors



RF Interface: SMA

RF Connector Style: Plug

RF Connector Mated Outer Diameter (Approximate): 6.35 mm [.25 in ]

Impedance:  $50 \Omega$ 

Compatible With RF Cable Type: RG 405

# Features



### Product Type Features

Connector Product Type	Connector Assembly				
Connector Seal & Plug Type	Gasket				
RF Interface	SMA				
RF Connector Style	Plug				
Compatible With RF Cable Type	RG 405				
Connector System	Cable-to-Board				
Sealable	Yes				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	1				
Number of Coaxial Contacts	1				
Electrical Characteristics					
Impedance	50 Ω				
Body Features					

SMA RF Interface, Plug, 50  $\Omega$ , RG 405, Screw, 18 GHz Operating Frequency, Cable-to-Board, 1 Position, Sealable, Wire & Cable, Panel Mount, AMP SMA



Cable Connector Orientation	Straight				
Body Material	Stainless Steel				
Body Plating Material	Gold				
Contact Features					
RF Connector Center Contact Underplating Material	Copper				
RF Connector Contact Configuration	Not Captivated				
RF Connector Center Contact Plating Material	Gold				
RF Connector Center Contact Material	Brass				
Termination Features					
Termination Method to Wire & Cable	Solder				
Mechanical Attachment					
RF Connector Coupling Mechanism	Screw				
Connector Mounting Type	Panel Mount				
RF Contact Captivation Method	Mechanical				
Detent	Without				
Dimensions					
Product Length	11.2 mm[.442 in]				

RF Connector Mated Outer Diameter (Approximate)	6.35 mm[.25 in]				
Usage Conditions					
Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]				
Operation/Application					
Operating Frequency	18 GHz				
Packaging Features					
Packaging Quantity	100				
Packaging Method	Bag				
Other					
Coupling Nut Plating Material	Gold				
Coupling Nut Base Material	Stainless Steel				
Gasket Material	Silicone Rubber				
Grade	Professional				
Dielectric Material	PTFE				

SMA RF Interface, Plug, 50  $\Omega$ , RG 405, Screw, 18 GHz Operating Frequency, Cable-to-Board, 1 Position, Sealable, Wire & Cable, Panel Mount, AMP SMA



### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Compliant with Exemptions	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (.35% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free	
Solder Process Capability	Wave solder capable to 265°C	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**




SMA RF Interface, Plug, 50  $\Omega$ , RG 405, Screw, 18 GHz Operating Frequency, Cable-to-Board, 1 Position, Sealable, Wire & Cable, Panel Mount, AMP SMA





# Also in the Series AMP SMA

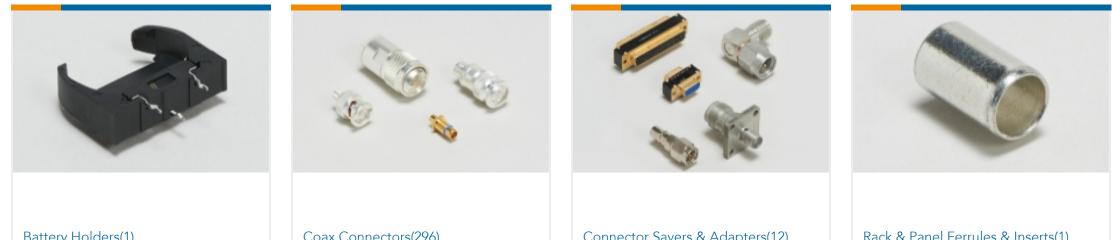

Battery Holders(1)	Coax Connectors(296)	Connector Savers & Adapters(12)	Rack & Panel Ferrules & Inserts(1)
RF Cable Assemblies(2)	RF Connector Hardware(2)	RF Connector Launchers(8)	RF Connector Shrouds(3)




RF Terminators(1)

Customers Also Bought

**C** For support call+1 800 522 6752

SMA RF Interface, Plug, 50  $\Omega$ , RG 405, Screw, 18 GHz Operating Frequency, Cable-to-Board, 1 Position, Sealable, Wire & Cable, Panel Mount, AMP SMA



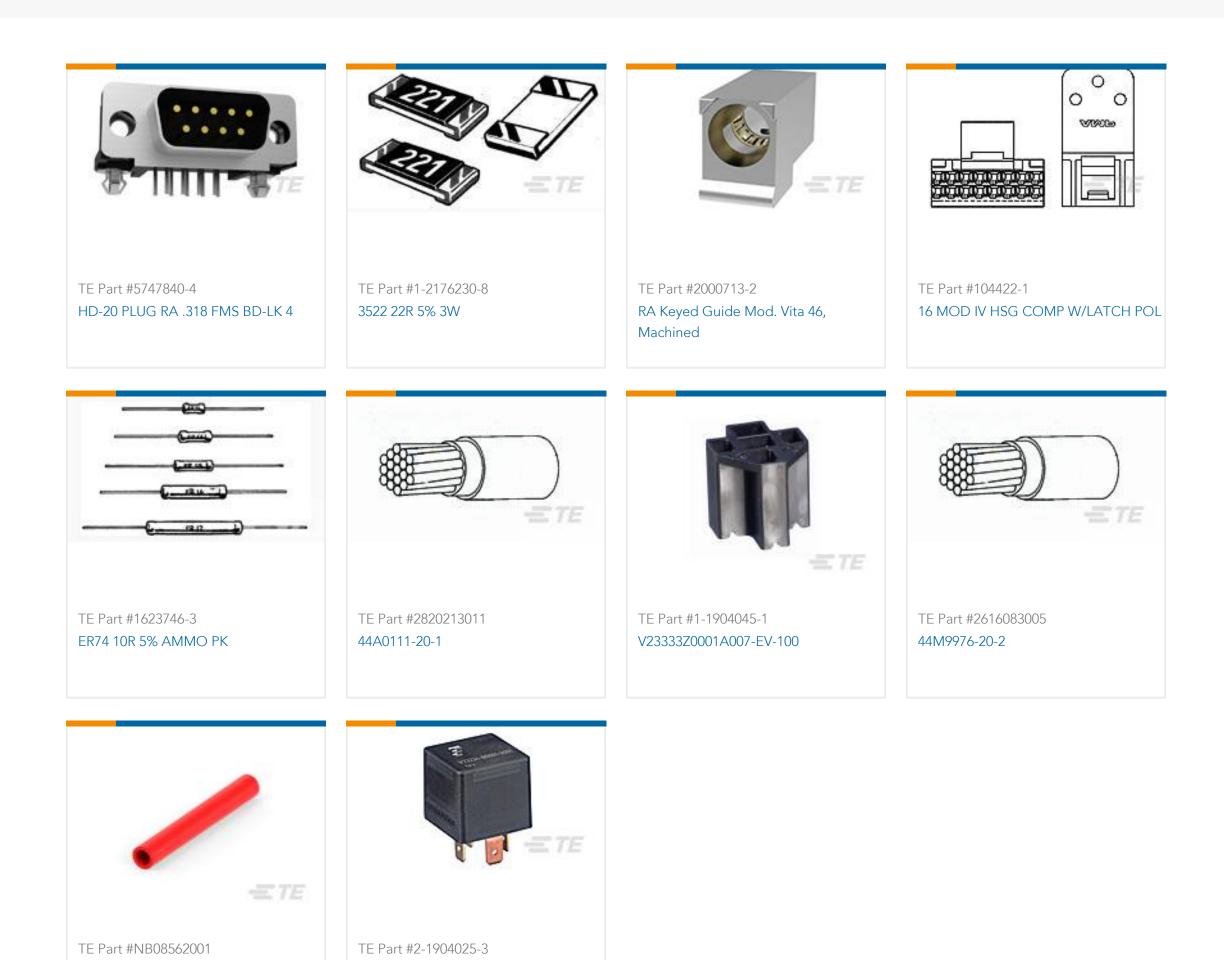

## Documents

ATUM-12/3-2-STK

Product Drawings SMA STR PLG DS RG405 GSS

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-1478904-0\_A2.2d\_dxf.zip

V23234A0004X051-EV-100

English

Customer View Model

ENG\_CVM\_CVM\_1-1478904-0\_A2.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-1478904-0\_A2.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**C** For support call+1 800 522 6752

SMA RF Interface, Plug, 50  $\Omega$ , RG 405, Screw, 18 GHz Operating Frequency, Cable-to-Board, 1 Position, Sealable, Wire & Cable, Panel Mount, AMP SMA



Product specification for SMA connectors with semi rigid cable

English

**Product Specification** 

English