

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized applications, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an ad experson



PowerTrench[®] Power Stage Asymmetric Dual N-Channel MOSFET

Features

Q1: N-Channel

- Max $r_{DS(on)}$ = 8 m Ω at V_{GS} = 10 V, I_D = 13 A
- Max $r_{DS(on)}$ = 11 m Ω at V_{GS} = 4.5 V, I_D = 11 A

Q2: N-Channel


- Max $r_{DS(on)}$ = 2.6 m Ω at V_{GS} = 10 V, I_D = 25 A
- Max $r_{DS(on)}$ = 3.2 m Ω at V_{GS} = 4.5 V, I_D = 22 A
- Low inductance packaging shortens rise/fall times, resulting in lower switching losses
- MOSFET integration enables optimum layout for lower circuit inductance and reduced switch node ringing
- RoHS Compliant

General Description

This device includes two specialized N-Channel MOSFETs in a dual PQFN package. The switch node has been internally connected to enable easy placement and routing of synchronous buck converters. The control MOSFET (Q1) and synchronous SyncFETTM (Q2) have been designed to provide optimal power efficiency.

Applications

- Computing
- Communications
- General Purpose Point of Load
- Notebook VCORE

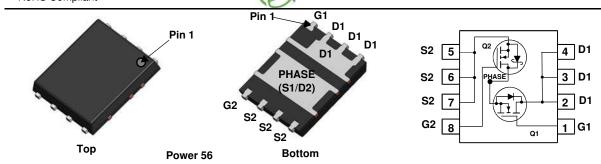

MOSFET Maximum Ratings T_A = 25 °C unless otherwise noted

Symbol	Parameter		Q1	Q2	Units	
V _{DS}	Drain to Source Voltage		30	30	V	
V _{DSt}	Drain to Source Transient Voltage (t _{Transient} < 100 ns)			33	V	
V _{GS}	Gate to Source Voltage	(Note 3)	±20	±12	V	
	Drain Current -Continuous (Package limited)	T _C = 25 °C	30	60		
	-Continuous (Silicon limited)	T _C = 25 °C	60	118	A	
D	-Continuous		13 ^{1a}	25 ^{1b}	A	
	-Pulsed		40	100		
E _{AS}	Single Pulse Avalanche Energy		33 ⁴	48 ⁵	mJ	
P _D	Power Dissipation for Single Operation T _A		2.2 ^{1a}	2.5 ^{1b}	w	
	Power Dissipation for Single Operation	T _A = 25 °C	1 ^{1c}	1 ^{1d}	vv	
T _J , T _{STG}	Operating and Storage Junction Temperature Range		-55 to	+150	°C	

Thermal Characteristics

$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	57 ^{1a}	50 ^{1b}	
R_{\thetaJA}	Thermal Resistance, Junction to Ambient	125 ^{1c}	120 ^{1d}	°C/W
$R_{ ext{ heta}JC}$	Thermal Resistance, Junction to Case	2.9	2.3	

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
22CF 10OD	FDMS3664S	Power 56	13 "	12 mm	3000 units

FDMS3664S
PowerTrench [®]
Power Stage

Symbol	Parameter	Test Cond	itions	Туре	Min	Тур	Max	Units
Off Chara	octeristics							
BV _{DSS}	Drain to Source Breakdown Voltage	$I_D = 250 \ \mu\text{A}, \ V_{GS} = 0 \ \text{V}$ $I_D = 1 \ \text{mA}, \ V_{GS} = 0 \ \text{V}$		Q1 Q2	30 30			V
ΔΒV _{DSS} ΔT _J	Breakdown Voltage Temperature Coefficient	D 1 2		Q1 Q2		16 18		mV/°C
I _{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 24 V, V_{GS} = 0 V$		Q1 Q2			1 500	μ Α μ Α
I _{GSS}	Gate to Source Leakage Current	$V_{GS} = 20 V, V_{DS} = 0 V$ $V_{GS} = 12 V, V_{DS} = 0 V$		Q1 Q2			100 100	nA nA
On Chara	cteristics							
V _{GS(th)}	Gate to Source Threshold Voltage	$\label{eq:VGS} \begin{array}{l} V_{GS} = V_{DS}, \ I_D = 250 \ \mu\text{A} \\ V_{GS} = V_{DS}, \ I_D = 1 \ \text{mA} \end{array}$		Q1 Q2	1.1 1.1	1.9 1.6	2.7 2.2	V
$rac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	$I_D = 250 \ \mu$ A, referen $I_D = 10 \ m$ A, referen		Q1 Q2		-6 -3		mV/°C
-	Drain to Source On Resistance		1 A	Q1		4 6 5.7	8 11 8.7	mΩ
r _{DS(on)}	Drain to Source On Hesistance	$V_{GS} = 10 \text{ V}, \ I_D = 25 \\ V_{GS} = 4.5 \text{ V}, \ I_D = 2 \\ V_{GS} = 10 \text{ V}, \ I_D = 25 \\ \end{array}$	2 A	Q2		2.0 2.5 2.9	2.6 3.2 4.5	11152
9 _{FS}	Forward Transconductance	$V_{DS} = 5 V$, $I_D = 13 A$ $V_{DS} = 5 V$, $I_D = 25 A$		Q1 Q2		62 179		S
Dynamic	Characteristics							
C _{iss}	Input Capacitance	Q1: $V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V}, \text{ f} = 1 \text{ MHZ}$ Q2: $V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V}, \text{ f} = 1 \text{ MHZ}$		Q1 Q2		1325 2515	1765 3345	pF
C _{oss}	Output Capacitance			Q1 Q2		466 645	620 860	pF
C _{rss}	Reverse Transfer Capacitance			Q1 Q2		46 74	70 115	pF
R _g	Gate Resistance			Q1 Q2	0.2 0.2	0.6 0.9	2 3	Ω
Switching	g Characteristics							
t _{d(on)}	Turn-On Delay Time			Q1 Q2		7.7 9.2	15 18	ns
t _r	Rise Time	Q1: $V_{DD} = 15 \text{ V}, \text{ I}_{D} = 13 \text{ A}, \text{ R}_{\text{GEN}} = 6 \Omega$ Q2: $V_{DD} = 15 \text{ V}, \text{ I}_{D} = 25 \text{ A}, \text{ R}_{\text{GEN}} = 6 \Omega$		Q1 Q2		2.2 3.4	10 10	ns
t _{d(off)}	Turn-Off Delay Time			Q1 Q2		19 28	34 46	ns
t _f	Fall Time			Q1 Q2		1.8 2.4	10 10	ns
Qg	Total Gate Charge	$V_{GS} = 0 V \text{ to } 10 V$	Q1:	Q1 Q2		21 37	29 52	nC
Q _g	Total Gate Charge	$V_{GS} = 0$ V to 4.5 V	V _{DD} = 15 V, I _D = 13 A	Q1 Q2		9.5 17	13 24	nC
			•		1			1

 Q_gs

 Q_{gd}

Gate to Source Gate Charge

Gate to Drain "Miller" Charge

Q2:

V_{DD} = 15 V, I_D = 25 A Q1

Q2

Q1

Q2

3.9

5.9


2.6

4

nC

nC


Symbol	Parameter	Test Conditions	Туре	Min	Тур	Max	Unit
Drain-So	urce Diode Characteristics						
V _{SD}	Source to Drain Diode Forward Voltage	$\begin{array}{ll} V_{GS} = 0 \ V, \ I_S = 13 \ A & (Note \ 2) \\ V_{GS} = 0 \ V, \ I_S = 2 \ A & (Note \ 2) \\ V_{GS} = 0 \ V, \ I_S = 25 \ A & (Note \ 2) \\ V_{GS} = 0 \ V, \ I_S = 2 \ A & (Note \ 2) \end{array}$	Q1 Q1 Q2 Q2		0.8 0.7 0.8 0.6	1.2 1.2 1.2 1.2	v
t _{rr}	Reverse Recovery Time	Q1: I _F = 13 A, di/dt = 100 A/µs	Q1 Q2		26 24	42 38	ns
Q _{rr}	Reverse Recovery Charge	Q2: I _F = 25 A, di/dt = 300 A/μs	Q1 Q2		10 22	20 34	nC
	ି ଜେ କ୍ଳାଟ୍ଡ ଝ୍ଳ ଝ େ. 125 °C/W when mounted minimum pad of 2 oz cog			C/W when 1um pad of			
	6 번입 4 8	ው <u>ተያያ</u> ዚ ያ					
EAS of 33 mJ	evice, the negative Vgs rating is for low duty cycle pulse is based on starting T _J = 25 °C; N-ch: L = 1.9 mH, I _{AS} = is based on starting T _J = 25 °C; N-ch: L = 0.6 mH, I _{AS} =	6 A, V_{DD} = 27 V, V_{GS} = 10 V. 100% test at L= 0	.1 mH, I _{AS}	= 16 A.	rating.		

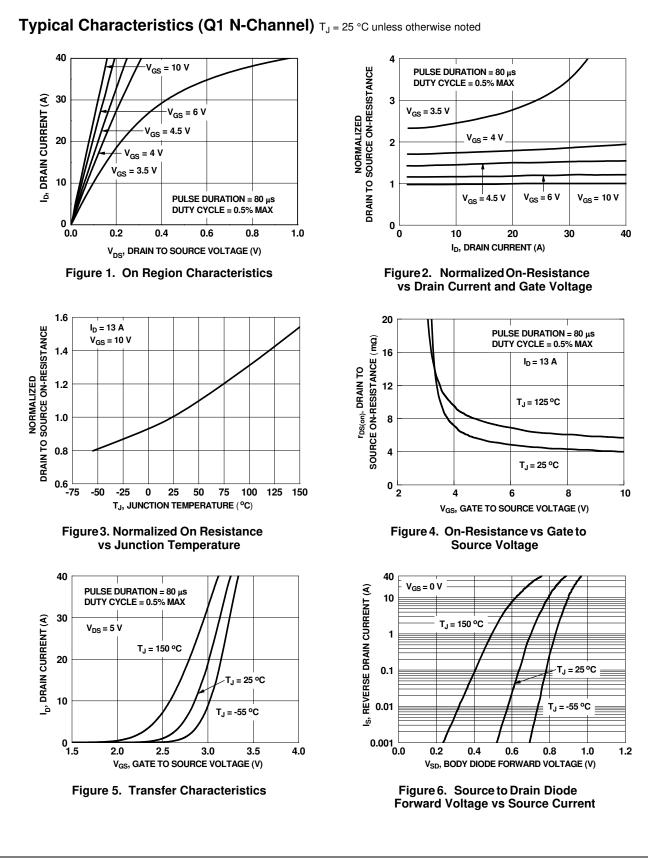


©2012 Fairchild Semiconductor Corporation FDMS3664S Rev.C5

www.fairchildsemi.com



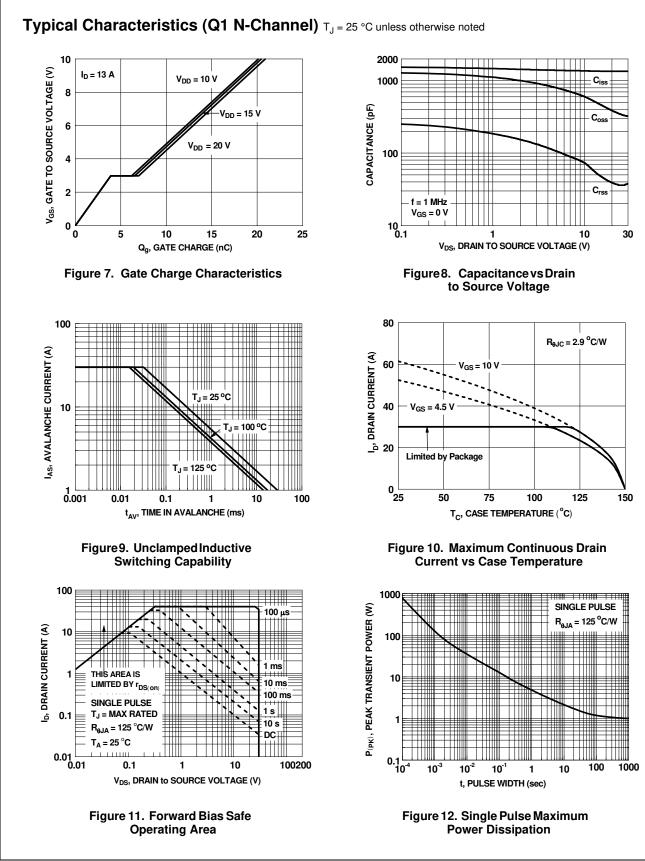


©2012 Fairchild Semiconductor Corporation FDMS3664S Rev.C5 www.fairchildsemi.com

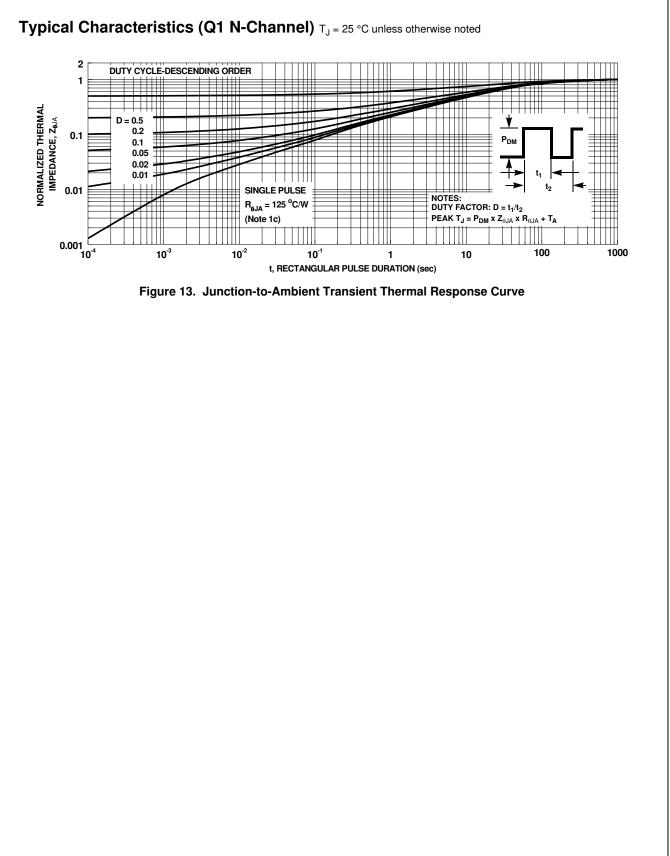


FDMS3664S PowerTrench[®] Power Stage



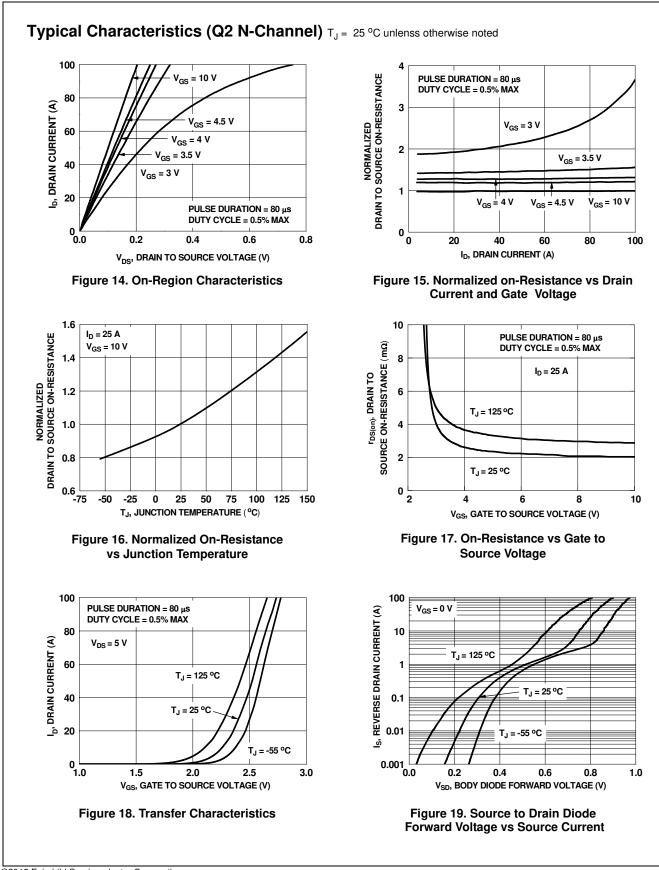


©2012 Fairchild Semiconductor Corporation FDMS3664S Rev.C5

FDMS3664S PowerTrench[®] Power Stage

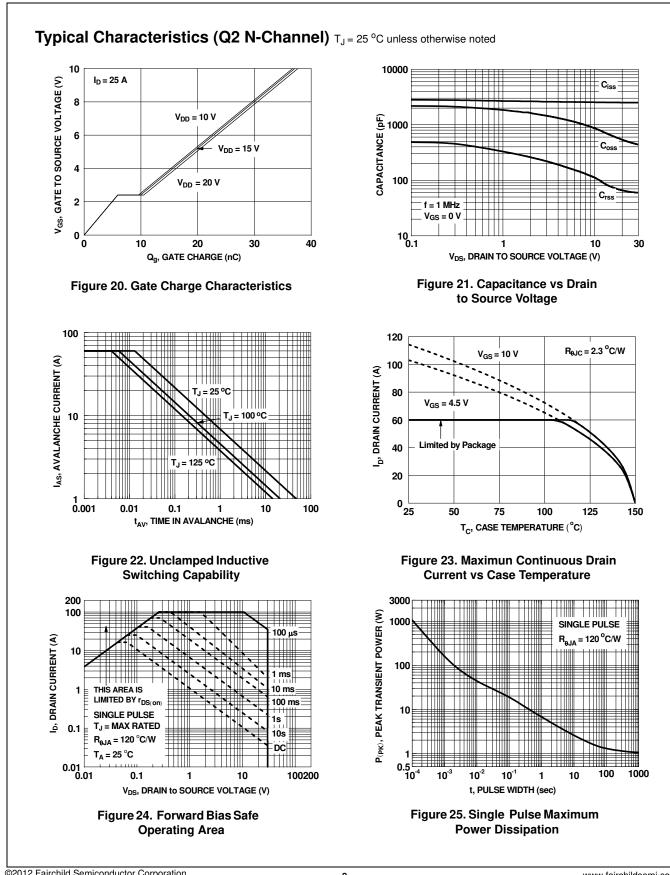

©2012 Fairchild Semiconductor Corporation FDMS3664S Rev.C5

www.fairchildsemi.com

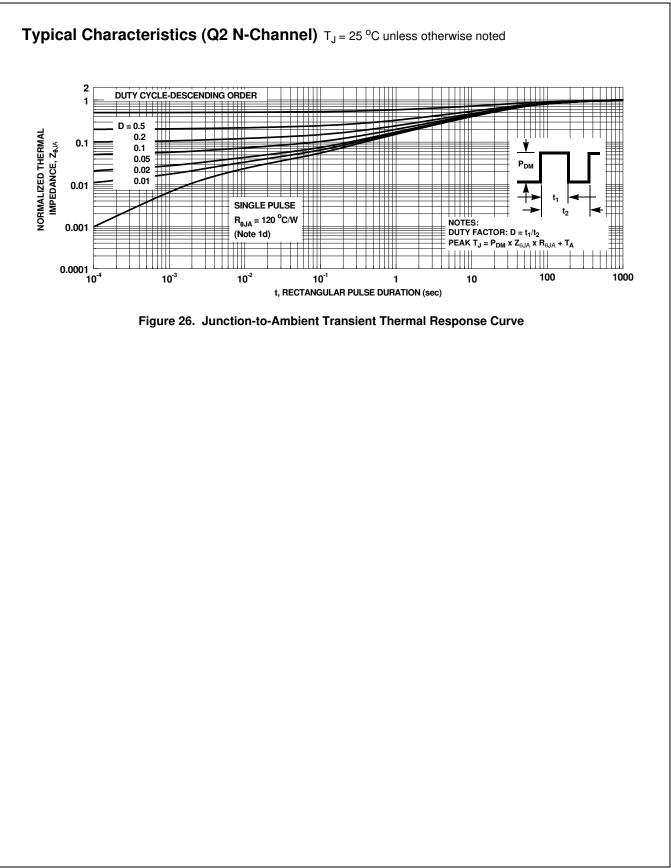

FDMS3664S PowerTrench[®] Power Stage

Typical Characteristics (continued)

SyncFET[™] Schottky body diode Characteristics

30

Fairchild's SyncFETTM process embeds a Schottky diode in parallel with PowerTrench MOSFET. This diode exhibits similar characteristics to a discrete external Schottky diode in parallel with a MOSFET. Figure 27 shows the reverse recovery characteristic of the FDMS3664S.

Schottky barrier diodes exhibit significant leakage at high temperature and high reverse voltage. This will increase the power in the device.






Figure 28. SyncFETTM body diode reverse leakage versus drain-source voltage

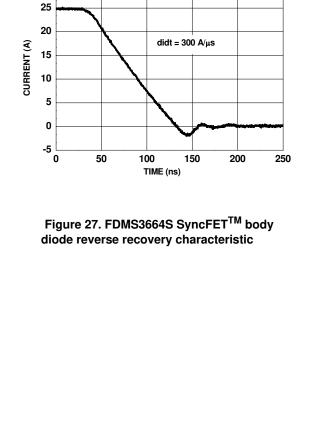

Application Information

1. Switch Node Ringing Suppression

Fairchild's Power Stage products incorporate a proprietary design* that minimizes the peak overshoot, ringing voltage on the switch node (PHASE) without the need of any external snubbing components in a buck converter. As shown in the figure 29, the Power Stage solution rings significantly less than competitor solutions under the same set of test conditions.

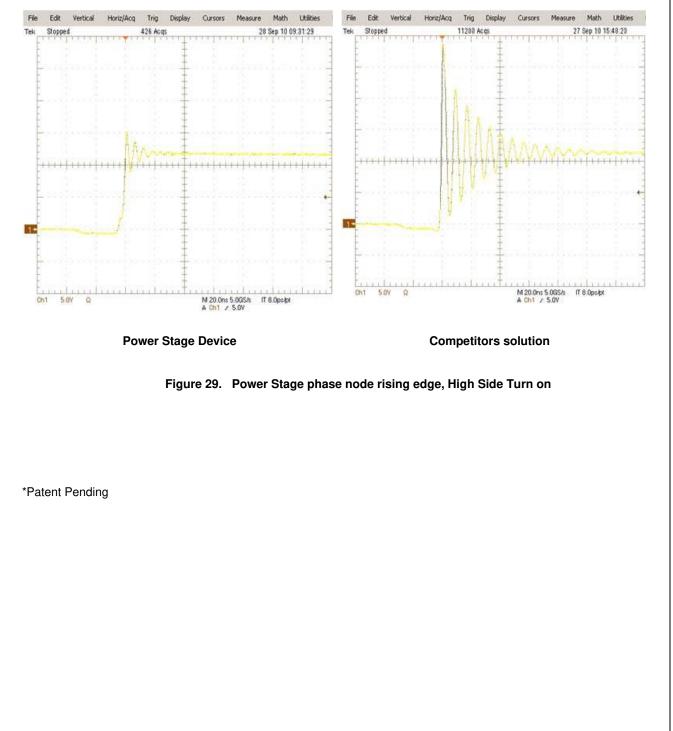



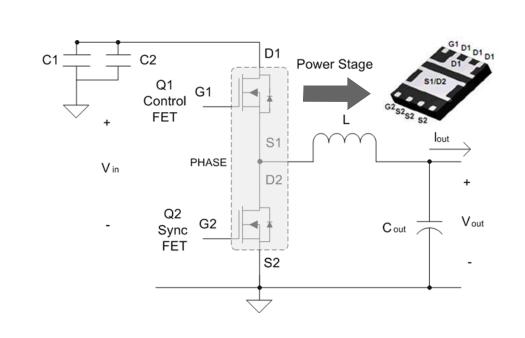


Figure 30. Shows the Power Stage in a buck converter topology

2. Recommended PCB Layout Guidelines

As a PCB designer, it is necessary to address critical issues in layout to minimize losses and optimize the performance of the power train. Power Stage is a high power density solution and all high current flow paths, such as VIN (D1), PHASE (S1/D2) and GND (S2), should be short and wide for better and stable current flow, heat radiation and system performance. A recommended layout procedure is discussed below to maximize the electrical and thermal performance of the part.







©2012 Fairchild Semiconductor Corporation FDMS3664S Rev.C5

Following is a guideline, not a requirement which the PCB designer should consider:

1. Input ceramic bypass capacitors C1 and C2 must be placed close to the D1 and S2 pins of Power Stage to help reduce parasitic inductance and high frequency conduction loss induced by switching operation. C1 and C2 show the bypass capacitors placed close to the part between D1 and S2. Input capacitors should be connected in parallel close to the part. Multiple input caps can be connected depending upon the application.

2. The PHASE copper trace serves two purposes; In addition to being the current path from the Power Stage package to the output inductor (L), it also serves as heat sink for the lower FET in the Power Stage package. The trace should be short and wide enough to present a low resistance path for the high current flow between the Power Stage and the inductor. This is done to minimize conduction losses and limit temperature rise. Please note that the PHASE node is a high voltage and high frequency switching node with high noise potential. Care should be taken to minimize coupling to adjacent traces. The reference layout in figure 31 shows a good balance between the thermal and electrical performance of Power Stage.

3. Output inductor location should be as close as possible to the Power Stage device for lower power loss due to copper trace resistance. A shorter and wider PHASE trace to the inductor reduces the conduction loss. Preferably the Power Stage should be directly in line (as shown in figure 31) with the inductor for space savings and compactness.


4. The PowerTrench[®] Technology MOSFETs used in the Power Stage are effective at minimizing phase node ringing. It allows the part to operate well within the breakdown voltage limits. This eliminates the need to have an external snubber circuit in most cases. If the designer chooses to use an RC snubber, it should be placed close to the part between the PHASE pad and S2 pins to dampen the high-frequency ringing.

5. The driver IC should be placed close to the Power Stage part with the shortest possible paths for the High Side gate and Low Side gates through a wide trace connection. This eliminates the effect of parasitic inductance and resistance between the driver and the MOSFET and turns the devices on and off as efficiently as possible. At higher-frequency operation this impedance can limit the gate current trying to charge the MOSFET input capacitance. This will result in slower rise and fall times and additional switching losses. Power Stage has both the gate pins on the same side of the package which allows for back mounting of the driver IC to the board. This provides a very compact path for the drive signals and improves efficiency of the part.

6. S2 pins should be connected to the GND plane with multiple vias for a low impedance grounding. Poor grounding can create a noise transient offset voltage level between S2 and driver ground. This could lead to faulty operation of the gate driver and MOSFET.


7. Use multiple vias on each copper area to interconnect top, inner and bottom layers to help smooth current flow and heat conduction. Vias should be relatively large, around 8 mils to 10 mils, and of reasonable inductance. Critical high frequency components such as ceramic bypass caps should be located close to the part and on the same side of the PCB. If not feasible, they should be connected from the backside via a network of low inductance vias.


13




SEE


DETAIL A






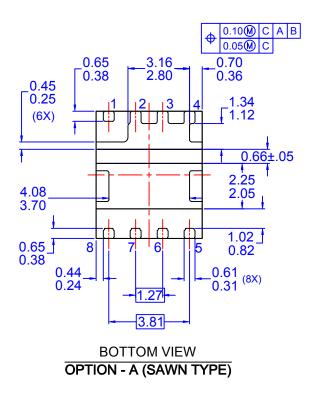

SIDE VIEW



(SCALE: 2X)

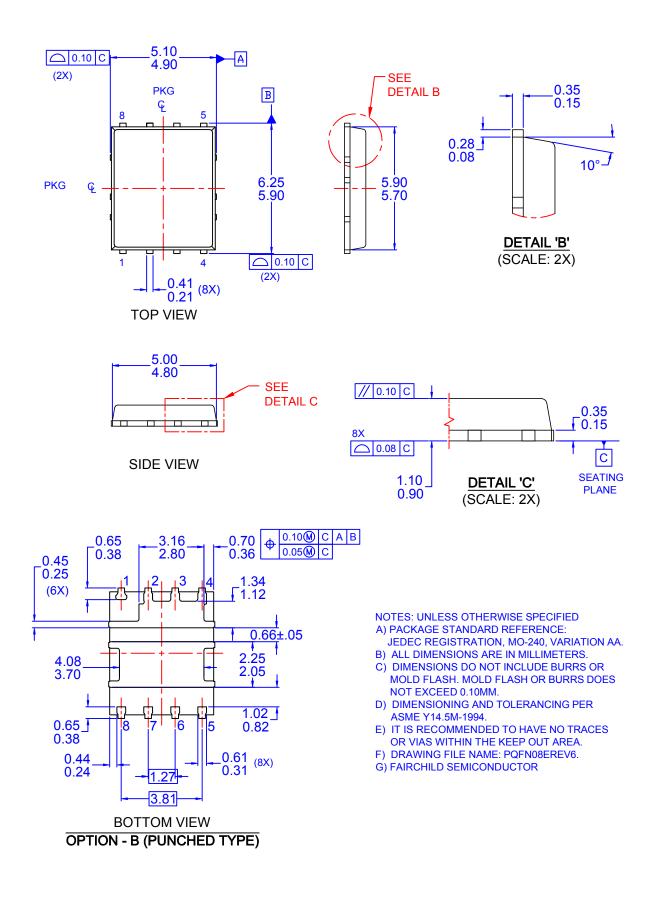

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative