




**Ultra Low Profile 0404 Balun  
50Ω to 200Ω Balanced**

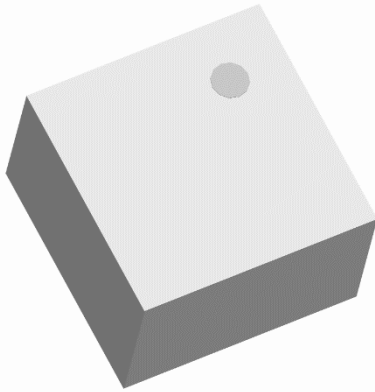

**Description:**

The BD2425N50200AHF is a low cost, low profile sub-miniature unbalanced to balanced transformer designed for differential inputs and output locations on modern chipsets in an easy to use surface mount package. The BD2425N50200AHF is ideal for high volume manufacturing and delivers higher performance than traditional ceramic baluns. The BD2425N50200AHF has an unbalanced port impedance of 50Ω and a 200Ω balanced port impedance. This transformation enables single ended signals to be applied to differential ports on modern integrated chipsets. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The BD2425N50200AHF is available on tape and reel for pick and place high volume manufacturing.


**Detailed Electrical Specifications:**

Specifications subject to change without notice.


Features:	Parameter	ROOM (25°C)			Unit	
		Min.	Typ.	Max		
<ul style="list-style-type: none"> <li>• 2400 – 2500 MHz</li> <li>• 0.56 mm Height Profile</li> <li>• 50 Ohm to 2 x 100 Ohm</li> <li>• Low Insertion Loss</li> <li>• 802.11 b+g</li> <li>• MIMO b+g</li> <li>• Bluetooth</li> <li>• Zigbee</li> <li>• Surface Mountable</li> <li>• Tape &amp; Reel</li> <li>• Non-conductive Surface</li> <li>• RoHS Compliant</li> <li>• Halogen Free</li> </ul>	Frequency	2400		2500	MHz	
	Unbalanced Port Impedance		50		Ω	
	Balanced Port Impedance			200		Ω
	Return Loss	18	27		dB	
	Insertion Loss*		0.6	0.7	dB	
	Amplitude Balance		0.5	1.0	dB	
	Phase Balance		2	6	Degrees	
	CMRR		29		dB	
	Power Handling			1.0	Watts	
	Operating Temperature		-55		+85	°C

\*Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)






**Outline Drawing:**

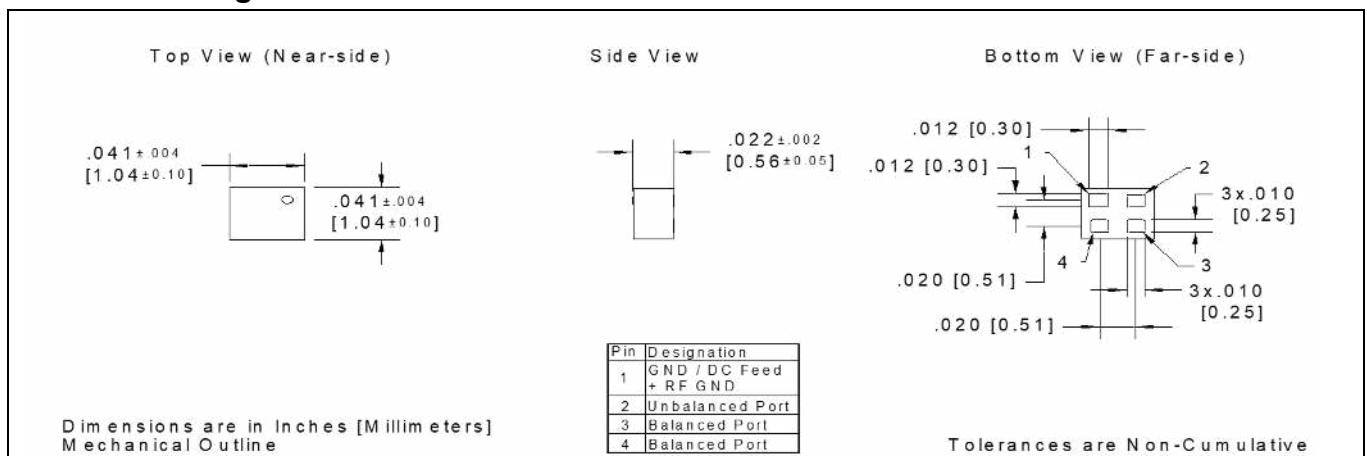

**Typical Performance: 2300 MHz. to 2600 MHz.**

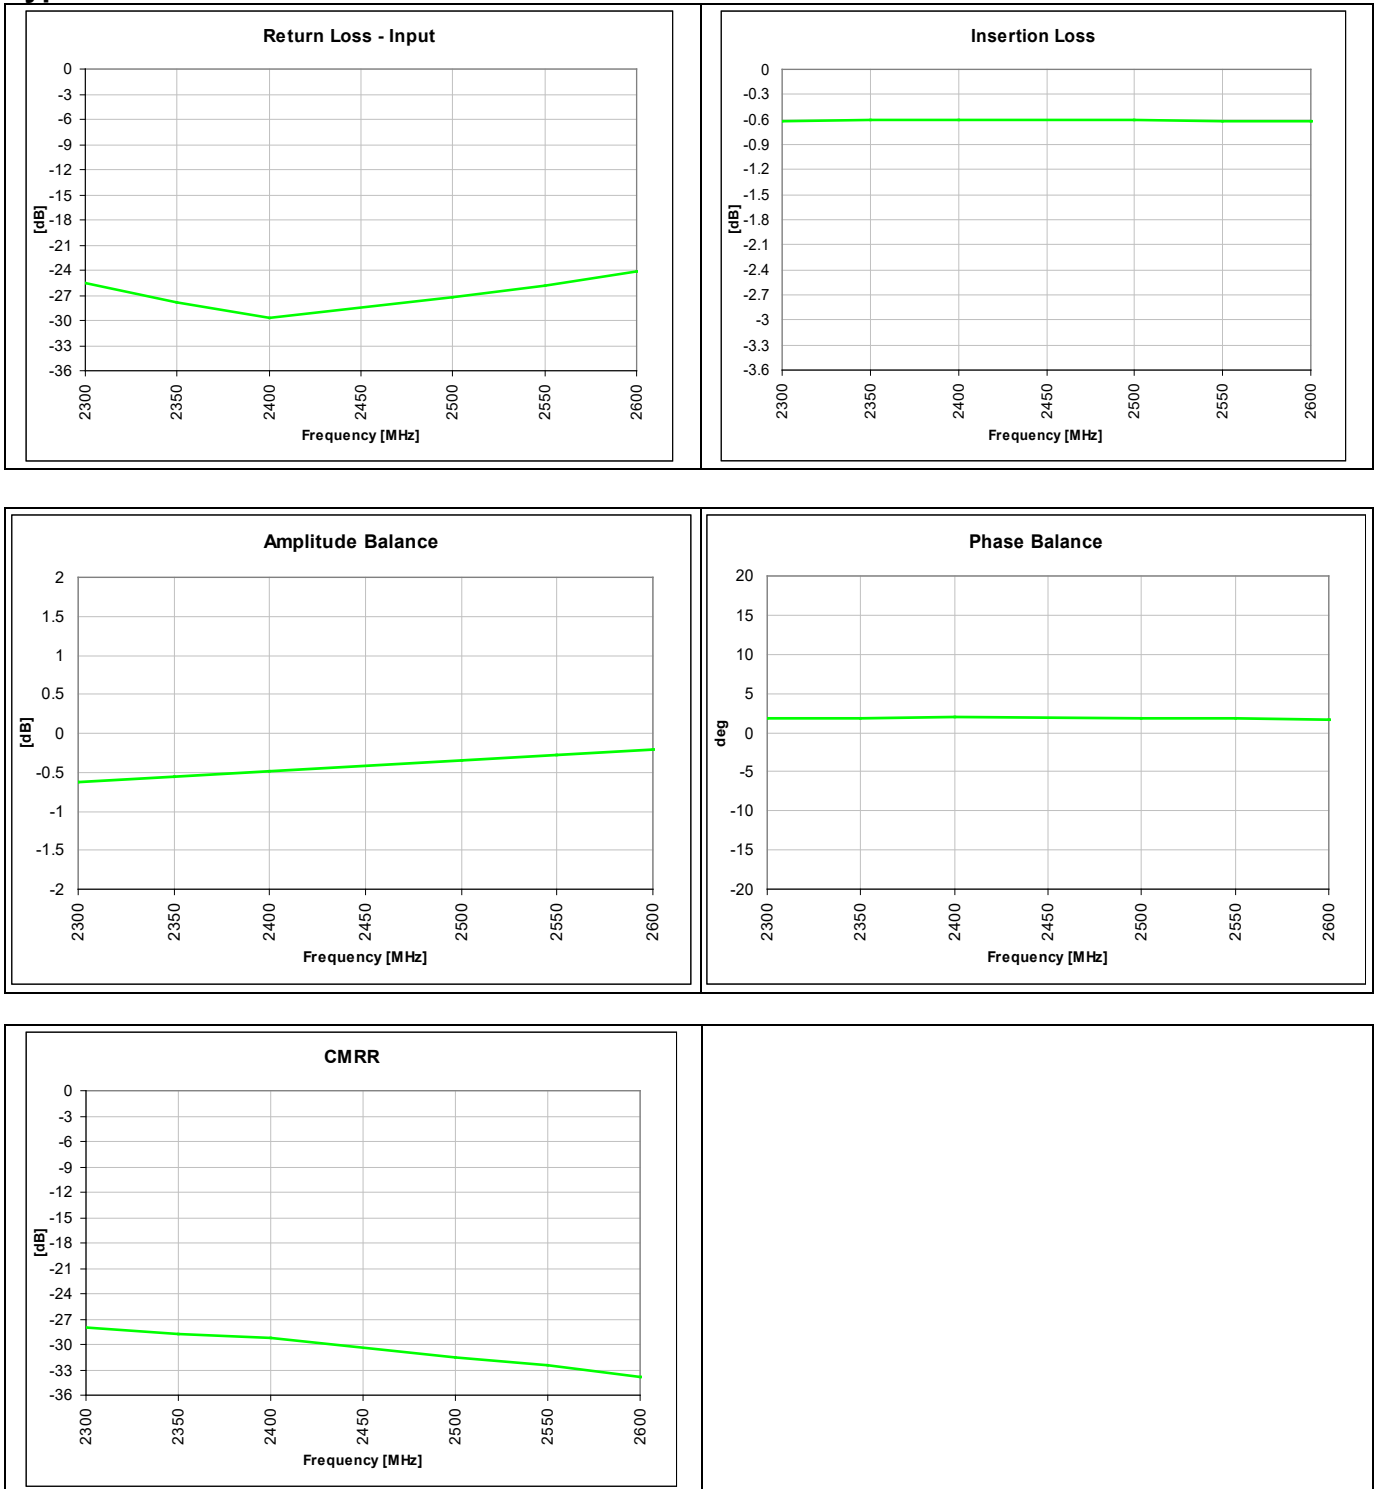

**Wide Band Performance: 500 MHz. to 8500 MHz.**

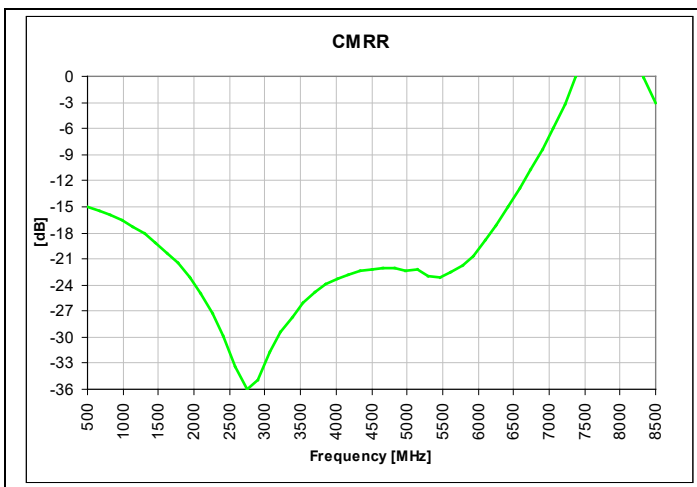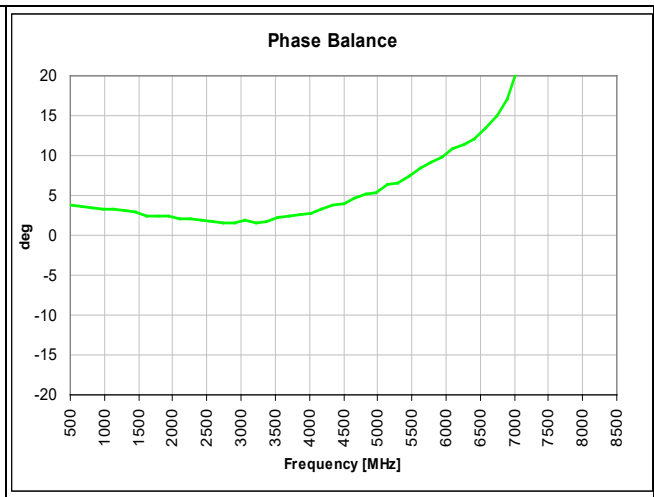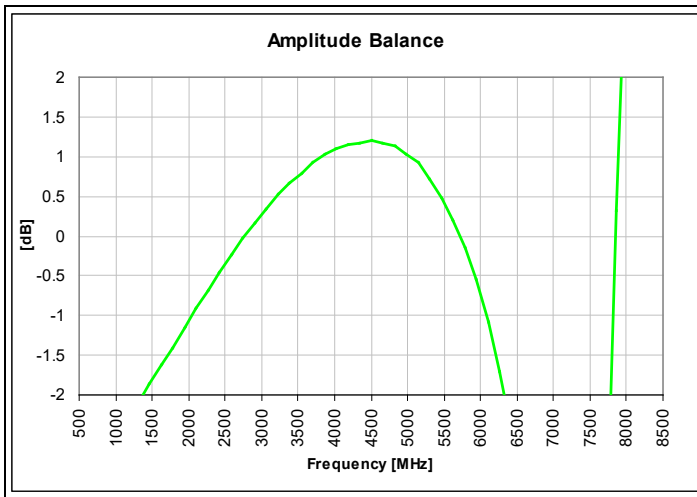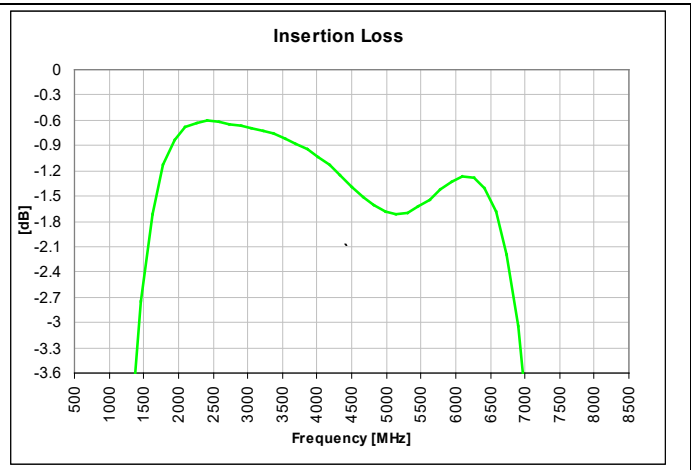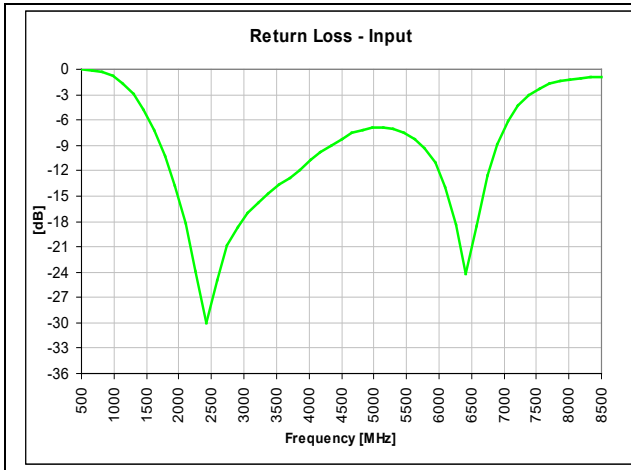


**Mounting Configuration:**

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.


All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability.

An example of the PCB footprint used in the testing of these parts is shown below. An example of a DC-biased footprint is also shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

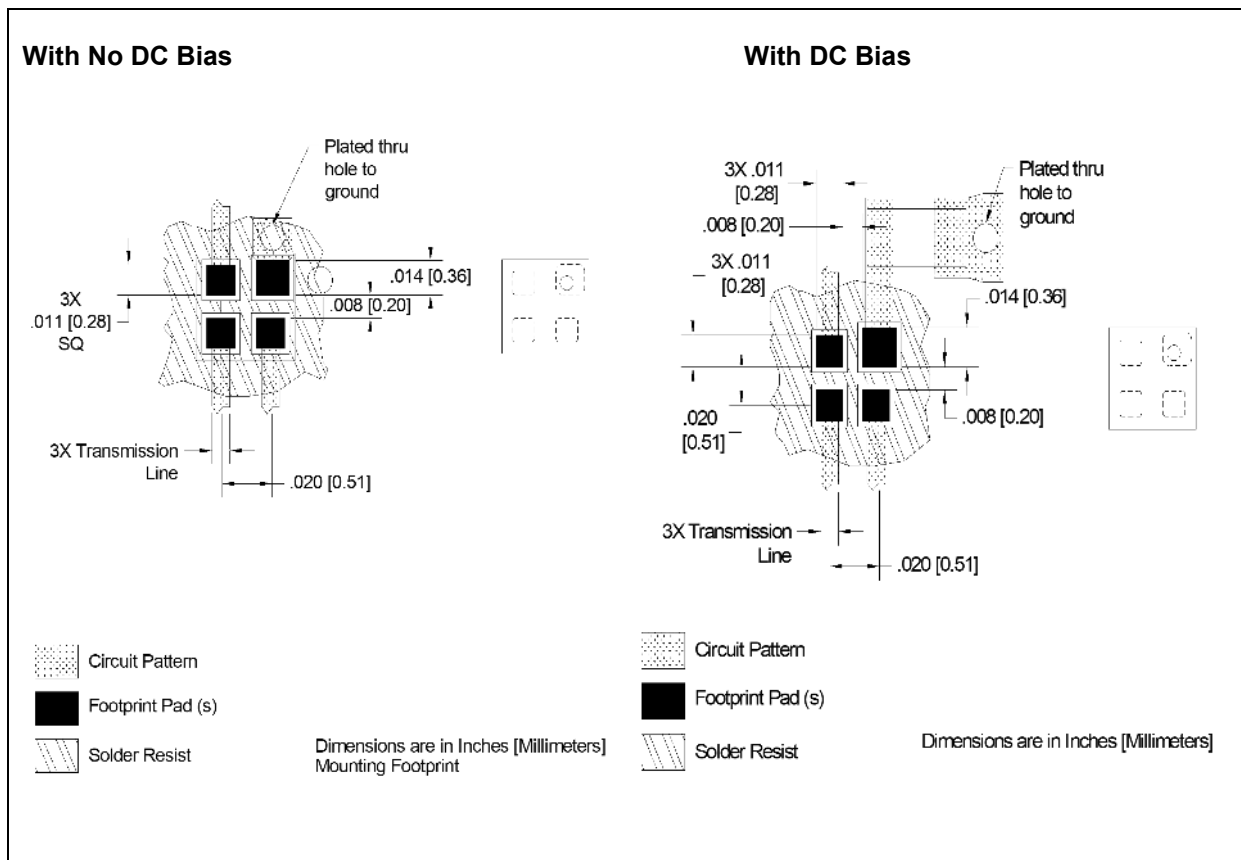

**Packaging and Ordering Information:**

Parts are available in reel and are packaged per EIA 481-2. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel. See Model Numbers below for further ordering information.

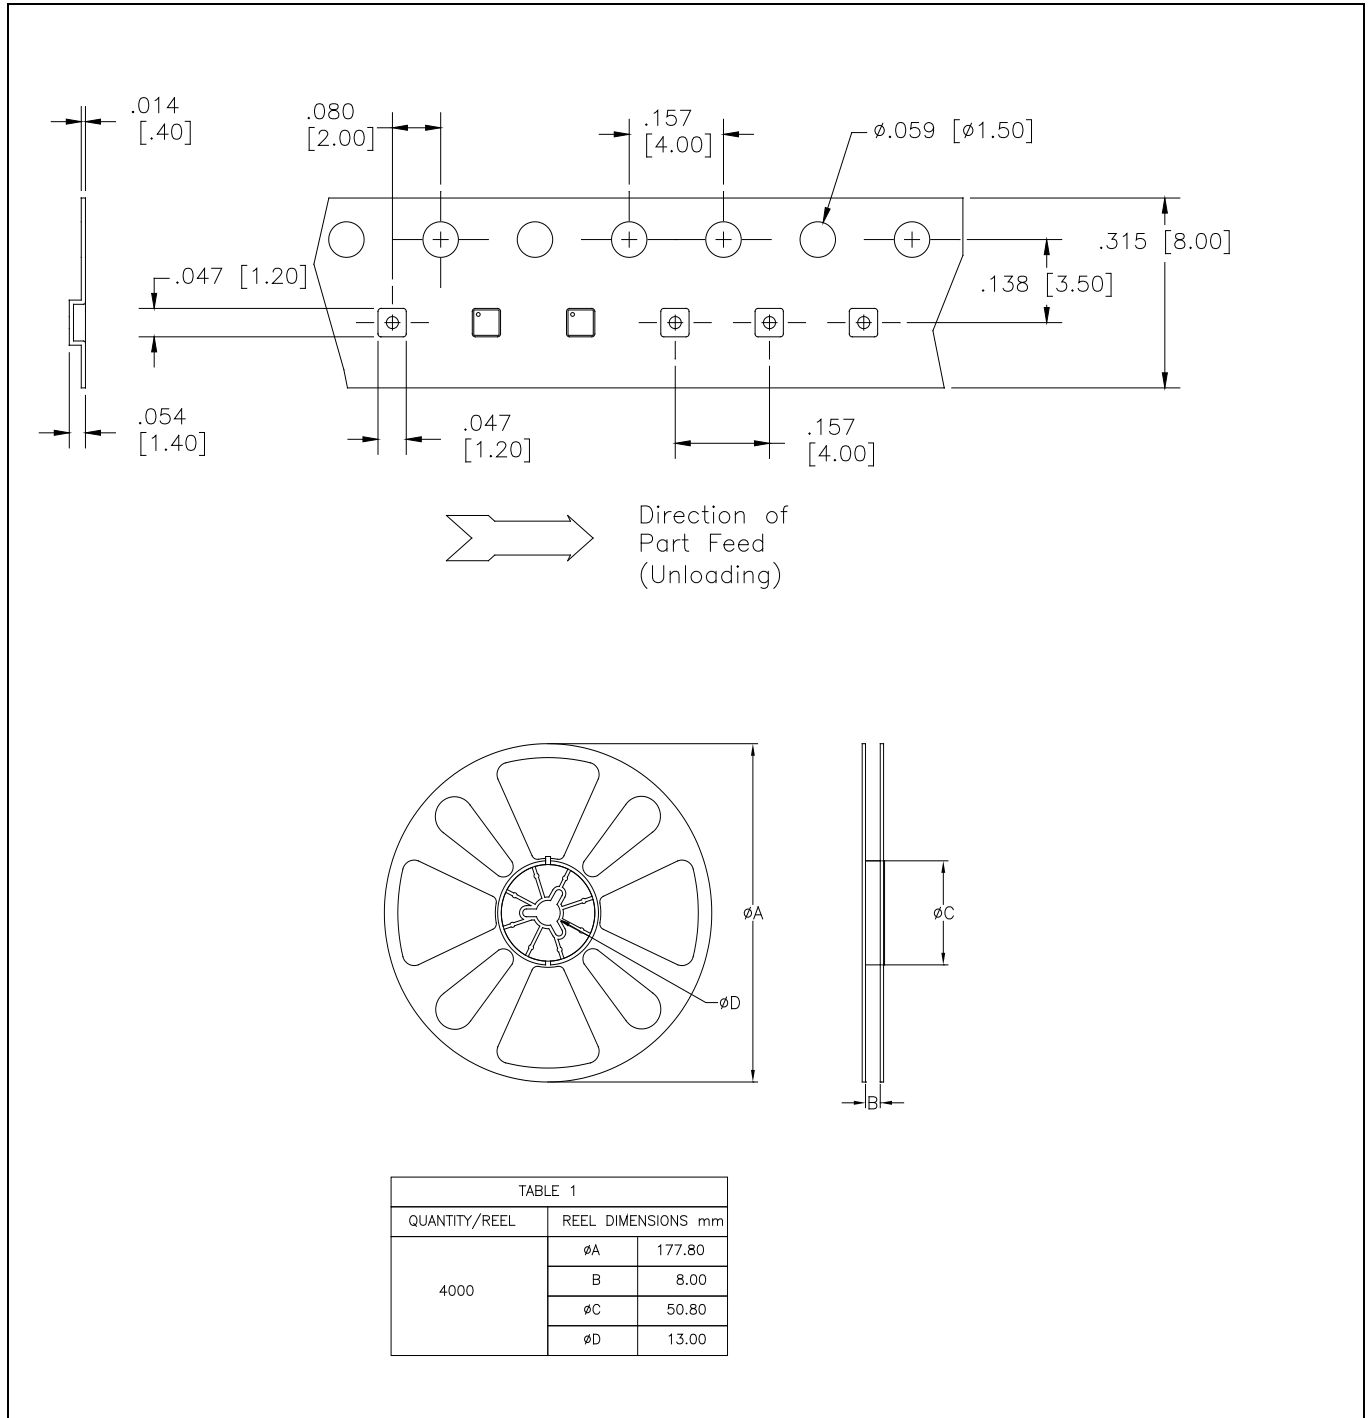

**Contact us:**  
[rf&s\\_support@ttm.com](mailto:rf&s_support@ttm.com)