


BUT11/11A

High Voltage Power Switching Applications

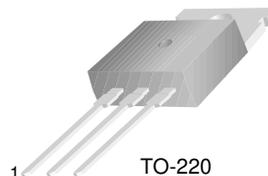

1.Base 2.Collector 3.Emitter

NPN Silicon Transistor

Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage : BUT11 : BUT11A	850	V
		1000	
V_{CEO}	Collector-Emitter Voltage : BUT11 : BUT11A	400	V
		450	
V_{EBO}	Emitter-Base Voltage	9	V
I_C	Collector Current (DC)	5	A
I_{CP}	*Collector Current (Pulse)	10	A
I_B	Base Current (DC)	2	A
I_{BP}	*Base Current (Pulse)	4	A
P_C	Collector Dissipation ($T_C=25^\circ\text{C}$)	100	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{STG}	Storage Temperature	- 65 ~ 150	$^\circ\text{C}$

Electrical Characteristics $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
$V_{CEO(sus)}$	* Collector-Emitter Sustaining Voltage : BUT11 : BUT11A	$I_C = 100\text{mA}, I_B = 0$	400			V
			450			V
I_{CES}	Collector Cut-off Current : BUT11 : BUT11A	$V_{CE} = 850\text{V}, V_{BE} = 0$			1	mA
					1	mA
I_{EBO}	Emitter Cut-off Current	$V_{BE} = 9\text{V}, I_C = 0$			10	mA
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage : BUT11 : BUT11A	$I_C = 3\text{A}, I_B = 0.6\text{A}$ $I_C = 2.5\text{A}, I_B = 0.5\text{A}$			1.5	V
					1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage : BUT11 : BUT11A	$I_C = 3\text{A}, I_B = 0.6\text{A}$ $I_C = 2.5\text{A}, I_B = 0.5\text{A}$			1.3	V
					1.3	V
t_{ON}	Turn On Time	$V_{CC} = 250\text{V}, I_C = 2.5\text{A}$ $I_{B1} = -I_{B2} = 0.5\text{A}$ $R_L = 100\Omega$			1	μs
t_{STG}	Storage Time				4	μs
t_F	Fall Time				0.8	μs

* Pulsed: pulsed duration = 300 μs , duty cycle = 1.5%

Thermal Characteristics $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Typ	Max	Units
$R_{\theta JC}$	Thermal Resistance, Junction to Case		1.25	$^\circ\text{C/W}$

Typical Characteristics

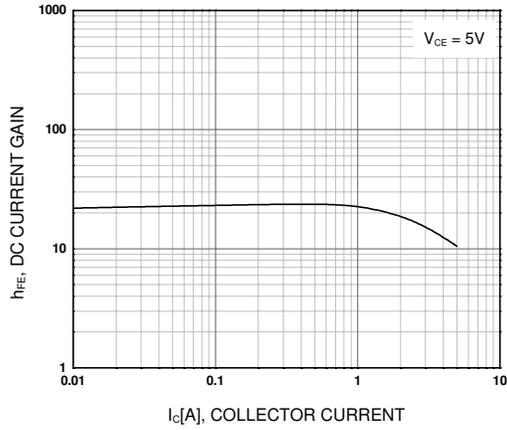


Figure 1. DC current Gain

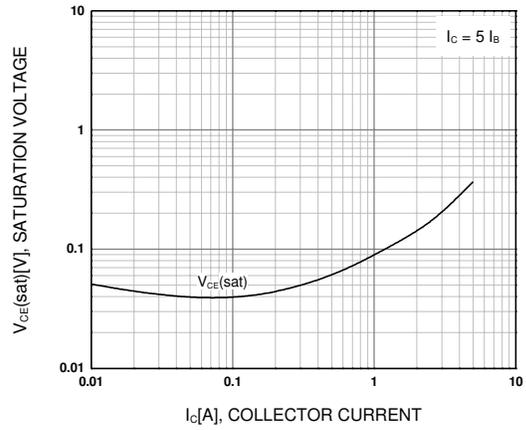


Figure 2. Collector-Emitter Saturation Voltage

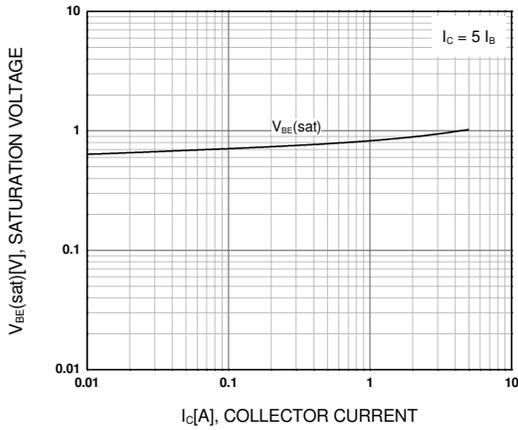


Figure 3. Base-Emitter Saturation Voltage

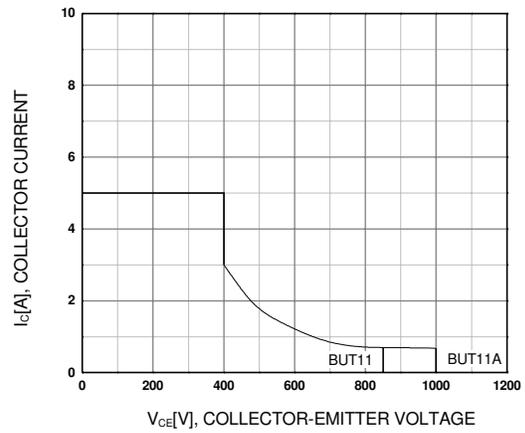


Figure 4. Reverse Biased Safe Operating Area

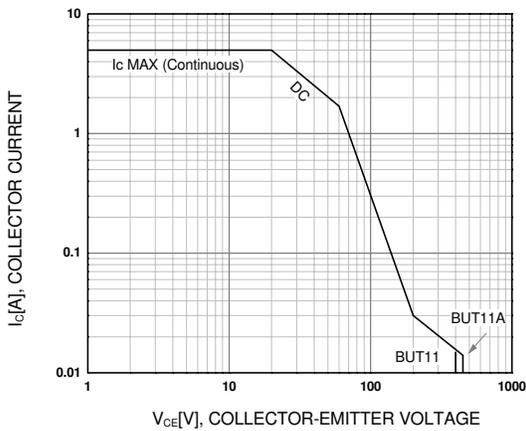


Figure 5. Safe Operating Area

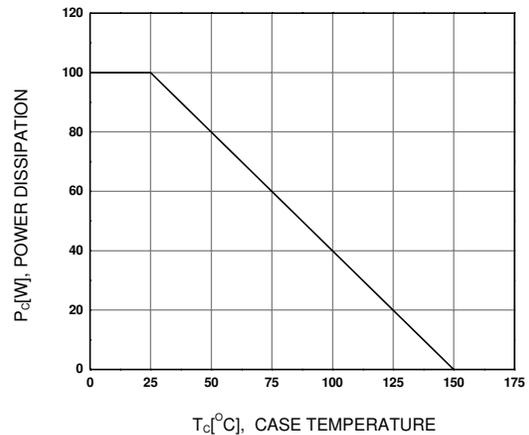


Figure 6. Power Derating

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE _x [™]	FAST [®]	OPTOPLANAR [™]	STAR*POWER [™]
Bottomless [™]	FAST _r [™]	PACMAN [™]	Stealth [™]
CoolFET [™]	FRFET [™]	POP [™]	SuperSOT [™] -3
CROSSVOLT [™]	GlobalOptoisolator [™]	Power247 [™]	SuperSOT [™] -6
DenseTrench [™]	GTO [™]	PowerTrench [®]	SuperSOT [™] -8
DO _M E [™]	HiSeC [™]	QFET [™]	SyncFET [™]
EcoSPARK [™]	ISOPLANAR [™]	QS [™]	TruTranslation [™]
E ² CMOS [™]	LittleFET [™]	QT Optoelectronics [™]	TinyLogic [™]
EnSigna [™]	MicroFET [™]	Quiet Series [™]	UHC [™]
FACT [™]	MICROWIRE [™]	SLIENT SWITCHER [®]	UltraFET [®]
FACT Quiet Series [™]	OPTOLOGIC [™]	SMART START [™]	VCX [™]

STAR*POWER is used under license

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

[Product Folders and](#) [Applica](#)

[find products](#)

[Home](#) >> [Find products](#) >>

[Products groups](#)

[Analog and Mixed](#)

[Signal](#)

[Discrete](#)

[Interface](#)

[Logic](#)

[Microcontrollers](#)

[Non-Volatile](#)

[Memory](#)

[Optoelectronics](#)

[Markets and applications](#)

[New products](#)

[Product selection and](#)

[parametric search](#)

[Cross-reference](#)

[search](#)

[technical information](#)

[buy products](#)

[technical support](#)

[my Fairchild](#)

[company](#)

BUT11
NPN Silicon Transistor

Contents

[Applications](#) | [Product status/pricing/packaging](#) | [Application notes](#)

Applications

High Voltage Power Switching

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
BUT11TU	Full Production	\$0.62	TO-220	3	RAIL
BUT11	Full Production	\$0.62	TO-220	3	BULK

* 1,000 piece Budgetary Pricing

[back to top](#)

Application notes

[AB-11: AB-11 PC Board Layout Checklist: DC-DC Converters](#) (17 K) Jul 19, 2002

[AN-5015: USB1T11A Transceiver and Specification Compliance](#) (201 K) Jul 19, 2002

[AN-909: AN-909 Simple Interface for 68HC11 to Microwire 'Chip Security' EEPROMs](#) (52 K) Jul 19, 2002

[AN-933: AN-933 Interfacing the NM93C86A Serial EEPROM to the 68HC11 Microcontroller](#) (29 K) Jul 19, 2002

[AN-42009: AN-42009 ML4824 Combo Controller Applications](#) (106 K) Jul 19, 2002

[AN-42030: AN-42030 Theory and Application of the ML4821 Average Current Mode PFC Controller](#) (259 K) Jul 19, 2002

[AN-42038: AN-42038 Benchmarking the Performance of the ML6440](#) (332 K) Jul 19, 2002

[AN-4111: AN-4111 Fairchild Power Switch Single Chip FSDH Series for Charger and Adapter Use](#) (1497 K) Jul 19, 2002

[Related Links](#)

[Request samples](#)

[Dotted line](#)
[How to order products](#)

[Dotted line](#)
[Product Change Notices \(PCNs\)](#)

[Dotted line](#)
[Support](#)

[Dotted line](#)
[Distributor and field sales representatives](#)

[Dotted line](#)
[Quality and reliability](#)

[Dotted line](#)
[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)



[e-mail this datasheet](#)



This page

[Print version](#)

[AN-1012: AN-1012 SPI Versus Microwire EEPROM Comparison](#) (25 K) Jul 19, 2002

[AN-4003: AN-4003 PC Power Supply Design with KA3511](#) (233 K) Jul 19, 2002

[AN-4103: AN-4103 A Fairchild Power Switch \(SPS\) Based Switched Mode Power Supply for Monitor Use](#) (413 K) Jul 19, 2002

[AN-42045: AN-42045 ML4824, A Novel Method for an Off-Line PFC-PWM Combo Controller](#) (129 K) Jul 19, 2002

[AN-55: AN-55 Guidelines for RC5035/36 Motherboard Designs](#) (175 K) Jul 19, 2002

[AN-6001: AN-6001 TMC2242C Application Note](#) (34 K) Jul 19, 2002

[AN-4108: AN-4108 A Fairchild Power Switch based on Switched Mode Power Supply for CRT Monitor Use](#) (256 K) Jul 19, 2002

[AN-7501: AN-7501 Switching Waveforms Of The L2FET: A 5 Volt Gate-Drive Power MOSFET](#) (171 K) Jul 19, 2002

[AN-7510: AN-7510 A New PSPICE Subcircuit for the Power MOSFET Featuring Global Temperature Options](#) (216 K) Jul 19, 2002

[AN-7511: AN-7511 Insulated-Gate Transistors Simplify AC-Motor Speed Control](#) (493 K) Jul 19, 2002

[AN-42046: Application Note 42046 FAN6800 Combo Controller Applications](#) (355 K) Jul 19, 2002

[AN-9017: AN-9017 Manufacturing Technology of a Small Capacity Inverter Using a Fairchild IGBT](#) (437 K) Jul 19, 2002

[AN-5040: Using the RapidConfigure\(RC\) Interface for MSX532](#) (198 K) Jul 19, 2002

[AN-366: Designer's Encyclopedia of One-Shots](#) (2522 K) Jul 19, 2002

[AN-42031: AN-42031 Multiple Output Design Considerations for the ML4863](#) (179 K) Jul 19, 2002

[AN-42043: AN-42043 ML4803 240W Off-Line Power Supply with PFC](#) (296 K) Jul 19, 2002

[AN-7506: AN-7506 Spicing-Up Spice II Software For Power MOSFET Modeling](#) (242 K) Jul 19, 2002

[AN-9018-3: AN-9018-3 \(Part 3 of 3\) Smart Power Module User's Guide](#) (544 K) Jul 19, 2002

[AB-10: AB-10 Substituting the RC5051 for the RC5050](#) (17 K) Jul 19, 2002

[AN-257: Simplified Multi-Digit LED Display Design Using MM74C911 and MM74C912 Display Controllers](#) (259 K) Jul 19, 2002

[AN-4002: AN-4002 PC Power Supervisory Circuit with KA3502](#) (220 K) Jul 19, 2002

[AN-4101: AN-4101 Lithium-Ion Battery Charger and Adapter Using a Fairchild Power Switch \(SPS\)](#) (424 K) Jul 19, 2002

[AN-42004: AN-42004 Using the ML4425/ML4426 BLDC Motor Controllers](#) (665 K) Jul 19, 2002

[AN-42010: AN-42010 Theory and Application of the ML4874 and ML4876 LCD Backlight Controller ICs](#) (548 K) Jul 19, 2002

[AN-42026: AN-42026 Phase Modulated PWM Topology with the ML4818](#) (279 K) Jul 19, 2002

[AN-42037: AN-42037 ML4423 Application Guidelines](#) (295 K) Jul 19, 2002

[AN-7507: AN-7507 SP600 and SP601 an HVIC MOSFET/IGT Driver for Half-Bridge Topologies](#) (421 K) Jul 19, 2002

[AN-4102: AN-4102 A Fairchild Power Switch Based SMPS for Color Television Receivers](#) (334 K) Jul 19, 2002

[AN-4106: AN-4106 Multiple Output Switched Mode Power Supplies Using Fairchild Power Switch](#) (383 K) Jul 19, 2002

[AN-57: AN-57 Third Generation Power Conversion Solution for Pentium II Motherboards](#) (120 K) Jul 19, 2002

[AN-9010: AN-9010 MOSFET Basics](#) (352 K) Jul 19, 2002

[ABR-42022: ABR-42022 ML4833 220V Non-Dimming Ballast Design](#) (68 K) Jul 19, 2002

[AN-4105: AN-4105 Design Considerations for Switched Mode Power Supplies Using a Fairchild Power Switch \(SPS\) in a Flyback Converter](#) (444 K) Jul 19, 2002

[AN-42001: AN-42001 Low Cost Non-Dimming 220V Ballast Design](#) (403 K) Jul 19, 2002

[AN-53: AN-53 Implementing an RC5051 DC-DC Converter on Pentium II Motherboards](#) (143 K) Jul 19, 2002

[AN-56: AN-56 Total Power Conversion Solution for Pentium II Motherboards](#) (137 K) Jul 19, 2002

[AN-7503: AN-7503 The Application Of Conductivity-Modulated Field-Effect Transistors](#) (176 K) Jul 19, 2002

[AN-4104: AN-4104 Forward Converter Type PC SMPS with SPS](#) (283 K) Jul 19, 2002

[AN-42040: AN-42040 Applying the ML6431 Video Genlock Using the ML6430/ML6431 Evaluation Kit](#) (416 K) Jul 19, 2002

[AN-7512: AN-7512 Parallel Operation Of Insulated Gate Transistors](#) (127 K) Jul 19, 2002

[AN-7520: AN-7520 Numerical Method for Evaluating IGBT Losses](#) (169 K) Jul 19, 2002

[AN-9020: AN-9020 IGBT Basic II](#) (384 K) Jul 19, 2002

[AN-1025: Maximum Power Enhancement Techniques for SuperSOT™-3 Power MOSFETs](#) (254 K) Jul 19, 2002

[AN-4116: AN-4116 A Fairchild Power Switch \(SPS\) based on Switched Mode Power Supply for LCD Monitor Use](#) (232 K) Jul 19, 2002

[AN-7502: AN-7502 Power MOSFET Switching Waveforms: A New Insight](#) (200 K) Jul 19, 2002

[AN-7509: AN-7509 A Spice-2 Subcircuit Representation For Power MOSFETs Using Empirical Methods](#) (157 K) Jul 19, 2002

[AN-7513: AN-7513 Parallel Operation Of Semiconductor Switches](#) (111 K) Jul 19, 2002

[AN-758: AN-758 Using Fairchild's Microwire EEPROM](#) (57 K) Jul 19, 2002

[AN-9012: AN-9012 Induction Heating System Topology Review](#) (230 K) Jul 19, 2002

[AN-4121: AN-4121 Design of Power Factor Correction Circuit Using FAN7527B](#) (124 K) Jul 19, 2002

[AN-9014: AN-9014 Fairchild QFET for Synchronous Rectification DC to DC Converters](#) (175 K) Jul 19, 2002

[AB-14: AB-14 Details of Output Capacitor Selection for Pentium II](#)

[Processor Converters Using the RC5051](#) (32 K) Jul 19, 2002

[AN-376: Logic-System Design Techniques Reduce Switching-CMOS Power](#) (250 K) Jul 19, 2002

[AN-4004: AN-4004 High Efficiency Power Factor Controller Design for Ballast](#) (913 K) Jul 19, 2002

[AN-822: AN-822 Enhancing the Performance of Serial CMOS EEPROMs](#) (47 K) Jul 19, 2002

[AN-860: AN-860 Protecting Data in Serial EEPROMs](#) (28 K) Jul 19, 2002

[AN-9006: AN-9006 IGBT Application Note for Camera Strobe](#) (146 K) Jul 19, 2002

[AN-936: AN-936 How to Use the NM93C86A Serial EEPROM as a PC/Laptop Detachable Printer File Memory Card \(DPFMC\)](#) (31 K) Jul 19, 2002

[AN-4124: AN-4124 Camera One Chip Controller](#) (118 K) Jul 19, 2002

[MS-6500: DDR SDRAM Signaling Design Notes](#) (170 K) Jul 19, 2002

[AN-9016: AN-9016 IGBT Basics 1](#) (878 K) Jul 19, 2002

[AN-1027: AN-1027 Maximum Power Enhancement Techniques for SuperSOT™-8 Power MOSFETs](#) (201 K) Jul 19, 2002

[AN-1028: AN-1028 Maximum Power Enhancement Techniques for SOT-223 Power MOSFETs](#) (255 K) Jul 19, 2002

[AN-1029: AN-1029 Maximum Power Enhancement Techniques for SO-8 Power MOSFETs](#) (256 K) Jul 19, 2002

[AN-138: Using the CMOS Dual Monostable Multivibrator](#) (229 K) Jul 19, 2002

[AN-42025: AN-42025 Generating Fixed Frequency Sine Waves with ML2035](#) (193 K) Jul 19, 2002

[AN-640: Understanding and Minimizing Ground Bounce](#) (596 K) Jul 19, 2002

[AN-4107: AN-4107 Power Factor Correction Controller](#) (105 K) Jul 19, 2002

[AN-7505: AN-7505 Improved IGBTs with Fast Switching Speed And High-Current Capability](#) (126 K) Jul 19, 2002

[AN-7500: AN-7500 Understanding Power MOSFETs](#) (108 K) Jul 19, 2002

[AN-7504: AN-7504 The IGBTs - A New High Conductance MOS-Gated Device](#) (105 K) Jul 19, 2002

[AN-7508: AN-7508 HVIC/IGBT Half-Bridge Converter Evaluation Circuit](#) (81 K) Jul 19, 2002

[AN-7514: AN-7514 Single Pulse Unclamped Inductive Switching: A Rating System](#) (116 K) Jul 19, 2002

[AN-7515: AN-7515 A Combined Single Pulse and Repetitive UIS Rating System](#) (93 K) Jul 19, 2002

[AN-7516: AN-7516 Safe Operating Area Testing Without A Heat Sink](#) (67 K) Jul 19, 2002

[AN-7517: AN-7517 Practical Aspects of Using PowerMOS Transistors to Drive Inductive Loads](#) (104 K) Jul 19, 2002

[AN-7524: AN-7524 How to Determine Thermal Resistance for a Power Semiconductor Heat Sink in an SMPS](#) (59 K) Jul 19, 2002

[AN-7522: AN-7522 Using the Thermal Impedance Model](#) (71 K) Jul 19, 2002

[AN-9008: AN-9008 The Use of QFET in Flyback Converter](#) (124 K) Jul 19, 2002

[AN-9009: AN-9009 Analysis of a Resonant Type High Voltage Fly-back Converter in a CRT Horizontal Deflection Circuit and its High Voltage BJT Selection Guide-Line](#) (160 K) Jul 19, 2002

[AN-957: AN-957 Interfacing NM24C16 Serial EEPROM to the 8031 Microcontroller](#) (26 K) Jul 19, 2002

[AN-7001: AN-7001 Guidelines for Mounting Fairchild's BGA Packages](#) (212 K) Jul 19, 2002

[AN-7528: AN-7528 \(TB334\) Guidelines for Soldering Surface Mount Components to PC Boards](#) (53 K) Jul 19, 2002

[AN-9015: AN-9015 A180W, 100KHz Forward Converter Using QFET](#) (65 K) Jul 19, 2002

[AN-9018-2: AN-9018-2 \(Part 2 of 3\) Smart Power Module User's Guide](#) (3160 K) Jul 19, 2002

[AN-9021: AN-9021 A Novel IGBT Inverter Module for Low-Power Drive Applications](#) (732 K) Jul 19, 2002

[ABR-42017: ABR-42017 PAL Performance of the ML6427 and ML6428 for Post-DAC Reconstruction Filtering](#) (66 K) Jul 19, 2002

[ABR-42020: ABR-42020 The Smart Start™ Technique for BLDC Motors](#) (132 K) Jul 19, 2002

[ABR-42021: ABR-42021 Control Interface for Standard 0 - 10VDC Dimmers](#) (110 K) Jul 19, 2002

[ABR-6002: ABR-6002 RC5051 DC-DC Converter](#) (36 K) Jul 19, 2002

[AN-1026: AN-1026 Maximum Power Enhancement Techniques for SuperSOT™-6 Power MOSFETs](#) (220 K) Jul 19, 2002

[AN-1031: AN-1031 Considerations in Designing the Printed Circuit Boards of Embedded Switching Power Supplies](#) (87 K) Jul 19, 2002

[AN-1037: Embedded IEEE1149.1 Test Application Example](#) (385 K) Jul 19, 2002

[AN-177: Designing with MM74C908, MM74C918 Dual High Voltage CMOS Drivers](#) (489 K) Jul 19, 2002

[AN-313: DC Electrical Characteristics of MM74HC High Speed CMOS Logic](#) (198 K) Jul 19, 2002

[AN-317: AC Characteristics of MM74HC High Speed CMOS](#) (143 K) Jul 19, 2002

[AN-372: Designer's Encyclopedia of Bipolar One-Shots](#) (447 K) Jul 19, 2002

[AN-393: Transmission-Line Effects Influence High-Speed CMOS](#) (210 K) Jul 19, 2002

[AN-42005: AN-42005 ML65244, ML65245 and ML65541 Ultra Fast Octal Buffer/Transceiver Family](#) (516 K) Jul 19, 2002

[AN-476: Guide to ALS and AS](#) (284 K) Jul 19, 2002

[AN-42035: AN-42035 Component Video Filtering Using the ML6420/ML6421](#) (159 K) Jul 19, 2002

[AN-9011: AN-9011 High Input Voltage, Off-line Flyback Switching Power Supply using FSC IGBT \(SGL5N150UF\)](#) (75 K) Jul 19, 2002

[AN-7004: AN-7004 Power Converter Topology and MOSFET Selection for 48-V Telecom Applications](#) (80 K) Jul 19, 2002

[AN-314: Interfacing to MM74HC High-Speed CMOS Logic](#) (144 K) Jul

19, 2002
[MS-541: ABT Ratings, Specifications and Waveforms](#) (243 K) Jul 19, 2002
[MS-510: Interface Definition of Terms and Glossary](#) (156 K) Jul 19, 2002
[AN-3006: AN-3006 Optically Isolated Phase Controlling Circuit Solution](#) (318 K) Jul 19, 2002
[AN-3008: AN-3008 RC Snubber Networks for Thyristor Power Control and Transient Suppression](#) (930 K) Jul 19, 2002
[AB-28: AB-28 Power Conversion for the Data Communications Market](#) (333 K) Jul 19, 2002
[AB-18: AB-18 Using the RC5051 for a Katmai Motherboard Design](#) (41 K) Jul 19, 2002
[AN-1003: Ghost JTAG Interface for Graphical Host Reference Design](#) (696 K) Jul 19, 2002
[AN-140: CMOS Schmitt Trigger - A Uniquely Versatile Design Component](#) (148 K) Jul 19, 2002
[AN-303: HC-MOS Power Dissipation](#) (135 K) Jul 19, 2002
[AN-319: Comparison of MM74HC to 74LS, 74S and 74ALS Logic](#) (239 K) Jul 19, 2002
[AN-339: Fairchild's Process Enhancements Eliminate the CMOS SCR Latch-Up Problem in 74HC Logic](#) (144 K) Jul 19, 2002
[AN-375: High-Speed-CMOS Designs Address Noise and I/O Levels](#) (232 K) Jul 19, 2002
[AN-4110: AN-4110 Charger Control IC for Off-Line Lithium-Ion Battery Charger](#) (42 K) Jul 19, 2002
[AN-42003: AN-42003 Data Conversion Design Techniques for Process Control Applications](#) (336 K) Jul 19, 2002
[AN-42033: AN-42033 Boost Regulators for Battery Powered Applications](#) (321 K) Jul 19, 2002
[AN-661: FAST Design Considerations](#) (980 K) Jul 19, 2002
[AN-558: AN-558 Introduction to Power MOSFETs and their Applications](#) (200 K) Jul 19, 2002
[AN-768: ECL Backplane Design](#) (132 K) Jul 19, 2002
[AN-77: CMOS, The Ideal Logic Family](#) (184 K) Jul 19, 2002
[AN-90: 74C Family Characteristics](#) (209 K) Jul 19, 2002
[AN-1100: Thermal Considerations of Surface Mount Packages](#) (143 K) Jul 19, 2002
[MS-501: Surface Mount Tape-and-Reel Specification](#) (538 K) Jul 19, 2002
[MS-505: Logic Functional Selection Table](#) (72 K) Jul 19, 2002
[MS-518: CROSSVOLT Family Characteristics](#) (187 K) Jul 19, 2002
[MS-519: Low Voltage Logic Ratings, Specifications and Wave Forms](#) (100 K) Jul 19, 2002
[MS-522: Logic Products Ordering Information](#) (168 K) Jul 19, 2002
[MS-564: Backplane Designer's Guide - Section 4 - Backplane Design Considerations](#) (230 K) Jul 19, 2002
[MS-567: Backplane Designer's Guide - Section 7 - Backplane Transceiver Technologies](#) (460 K) Jul 19, 2002
[AN-9019: AN-9019 Motor Drive System Using SPM Inverter](#) (260 K) Jul 19, 2002
[AB-13: AB-13 Method and Advantages of Synchronizing Two RC5051](#)

[Converters](#) (56 K) Jul 19, 2002
[AB-22: AB-22 Output Voltage Drift in the RC5039](#) (14 K) Jul 19, 2002
[AB-8: AB-8 Selection of MOSFETs in Switch Mode DC-DC Converters](#) (24 K) Jul 19, 2002
[AB-9: AB-9 Suppressing MOSFET Gate Ringing in Converters: Selection of a Gate Resistor](#) (31 K) Jul 19, 2002
[AN-1030: AN-1030 Design with MOSFET Load Switch](#) (1458 K) Jul 19, 2002
[AN-377: DC Noise Immunity of CMOS Logic Gates](#) (90 K) Jul 19, 2002
[AN-4109: AN-4109 A Guide to the Design of Current Feedback Control](#) (107 K) Jul 19, 2002
[AN-4115: AN-4115 PC SMPS Secondary Side Control IC](#) (207 K) Jul 19, 2002
[AN-42000: AN-42000 Generating Phase Controlled Sinewaves with the ML2036](#) (52 K) Jul 19, 2002
[AN-5003: PC100 SDRAM Memory Driver Solutions](#) (195 K) Jul 19, 2002
[AN-5010: IEEE 1284 Interface Design Solutions](#) (217 K) Jul 19, 2002
[AN-5016: Double Data Rate Support ICs](#) (549 K) Jul 19, 2002
[AN-5026: Using BGA Packages](#) (722 K) Jul 19, 2002
[AN-754: Using Logic Devices with 25 Ohm Series Resistors in the Outputs](#) (90 K) Jul 19, 2002
[AN-780: Operating ECL from a Single Positive Supply](#) (77 K) Jul 19, 2002
[AN-831: Characteristics and Measurement Techniques of the Spectral Content of Signals Generated by High-Performance ICs](#) (149 K) Jul 19, 2002
[MS-503: TinyLogic Family Characteristics](#) (128 K) Jul 19, 2002
[MS-542: FACT Family Characteristics](#) (210 K) Jul 19, 2002
[MS-539: FACT Design Considerations](#) (260 K) Jul 19, 2002
[MS-511: AC/DC Family Characteristic Comparisons](#) (14 K) Jul 19, 2002
[MS-520: Logic Design Considerations](#) (216 K) Jul 19, 2002
[MS-521: VHC Description and Family Characteristics](#) (85 K) Jul 19, 2002
[MS-523: Fairchild Switch Family Characteristics](#) (87 K) Jul 19, 2002
[MS-565: Backplane Designer's Guide - Section 5 - Backplane Signal Conditioning](#) (260 K) Jul 19, 2002
[MS-566: Backplane Designer's Guide - Section 6 - Noise, Cross-talk, Jitter, Skew, and EMI](#) (211 K) Jul 19, 2002
[KM4170-PB: KM4170 Product Brief](#) (78 K) Jul 19, 2002
[KH600-PB: KH600 Product Brief](#) (93 K) Jul 19, 2002
[AN-3001: AN-3001 Optocoupler Input Drive Circuits](#) (352 K) Jul 19, 2002
[AN-3004: AN-3004 Applications of Zero Voltage Crossing Optically Isolated Triac Drivers](#) (367 K) Jul 19, 2002
[AB-17: AB-17 Adding an Over-Voltage Crowbar to an RC5051 Converter: Design and Analysis](#) (34 K) Jul 19, 2002
[AB-23: AB-23 A 1A, 3.3V Converter with High Efficiency and Small Footprint](#) (22 K) Jul 19, 2002
[AB-24: AB-24 Understanding Droop and Programmable Active Droop™](#) (161 K) Jul 19, 2002
[AB-26: AB-26 Using Other Voltages with the FAN5063](#) (38 K) Jul 19,

2002

[ABR-42015: ABR-42015 Reconstruction Filter Selection for HDTV and VGA/Application](#) (48 K) Jul 19, 2002

[AB-27: AB-27 Layout Guidelines for the FAN5240, PWM Controller for AMD Mobile Athlon™ and Mobile Duron™ Processors](#) (140 K) Jul 19, 2002

[ABR-42024: ABR-42024 Using the ML6428 as a Clamp and 27MHz Filter](#) (72 K) Jul 19, 2002

[ABR-6001: ABR-6001 RC5051 Converter Design Template](#) (20 K) Jul 19, 2002

[AN-118: CMOS Oscillators](#) (77 K) Jul 19, 2002

[AN-340: HCMOS Crystal Oscillators](#) (45 K) Jul 19, 2002

[AN-368: An Introduction to and Comparison of 74HCT TTL Compatible CMOS Logic](#) (83 K) Jul 19, 2002

[AN-42007: AN-42007 Safety, EMI and RFI Considerations](#) (390 K) Jul 19, 2002

[AN-42034: AN-42034 Synchronizing the ML4824 to Wide Frequency Ranges](#) (119 K) Jul 19, 2002

[AN-5004: Low Voltage Device Output Load Specifications, 30pF versus 50pF](#) (75 K) Jul 19, 2002

[AN-5005: PC100 Memory Driver Competitive Comparison](#) (279 K) Jul 19, 2002

[AN-5009: AN-5009 Fairchild's Logic Solutions for 133MHz Buffered Memory Modules](#) (70 K) Jul 19, 2002

[AN-5017: LVDS Fundamentals](#) (231 K) Jul 19, 2002

[AN-5019: LVDS: Calculating Driver/Receiver Power \(Preliminary\)](#) (88 K) Jul 19, 2002

[AN-5021: Bus Switch Undershoot Protection: Which Systems Need this Protection and Why](#) (145 K) Jul 19, 2002

[AN-51: AN-51 Migrating from the TMC2490/TMC2491 to the TMC2490A/TMC2491A](#) (34 K) Jul 19, 2002

[AN-52: AN-52 Configuring the TMC22x5y to Pass Closed Caption Data](#) (35 K) Jul 19, 2002

[AN-59: AN-59 Interfacing a PC Parallel Port to the TMC22x5y RBUS Serial Interface](#) (24 K) Jul 19, 2002

[AN-716: AN-716 Using the NM93CS EEPROM Family Features](#) (16 K) Jul 19, 2002

[AN-794: AN-794 Using an EEPROM - IIC Interface NM24C02/03/04/05/08/09/16/17](#) (37 K) Jul 19, 2002

[AN-817: Taking Advantage of ECL Minimum-Skew Clock Drivers](#) (117 K) Jul 19, 2002

[MS-540: ABT APPLICATIONS: Avoiding BUS Contention](#) (63 K) Jul 19, 2002

[MS-537: Interface Products Ordering Information and Physical Dimensions](#) (581 K) Jul 19, 2002

[MS-517: Fairchild's Logic Functional Cross-Reference Guide](#) (17 K) Jul 19, 2002

[MS-569: Backplane Designer's Guide - Section 9 - Layout Considerations](#) (246 K) Jul 19, 2002

[KM4470-PB: KM4470 Product Brief](#) (85 K) Jul 19, 2002

[KM4270-PB: KM4270 Product Brief](#) (94 K) Jul 19, 2002

[KM4211-PB: KM4211 Product Brief](#) (75 K) Jul 19, 2002
[FAN7564-PB: FAN7564 Product Brief](#) (160 K) Jul 19, 2002
[FAN5235-PB: FAN5235 Product Brief](#) (47 K) Jul 19, 2002
[FAN5231-PB: FAN5231 Product Brief](#) (299 K) Jul 19, 2002
[FAN5056MV85-PB: FAN5056MV85 Product Brief](#) (49 K) Jul 19, 2002
[FAN5230-PB: FAN5230 Product Brief](#) (272 K) Jul 19, 2002
[FAN7527-PB: FAN7527 Product Brief](#) (69 K) Jul 19, 2002
[FAN5093-PB: FAN5093 Product Brief](#) (115 K) Jul 19, 2002
[FAN4000-PB: FAN4000 Product Brief](#) (43 K) Jul 19, 2002
[FS6M07652RTC-PB: FS6M07652RTC Product Brief](#) (55 K) Jul 19, 2002
[AB-502: Application Brief: FSAL200 LAN Switch Reduces Component Cost for Laptop PCs Using Docking Stations](#) (148 K) Jul 19, 2002
[AN-9013: AN-9013 Reducing Switching Losses with QFET in a Step-up Convert](#) (88 K) Jul 19, 2002
[AN-9018-1: AN-9018-1 \(Part 1 of 3\) Smart Power Module User's Guide](#) (1683 K) Jul 19, 2002

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor

Search input field with a search icon

Buttons: [space] [Product Folders and] [Apply]

find products

Home >> Find products >>

Products groups

Analog and Mixed

Signal

Discrete

Interface

Logic

Microcontrollers

Non-Volatile

Memory

Optoelectronics

Markets and applications

New products

Product selection and

parametric search

Cross-reference

search

technical information

buy products

technical support

my Fairchild

company

BUT11A
NPN Silicon Transistor

Contents

[Applications](#) | [Product status/pricing/packaging](#) | [Application notes](#)

Applications

High Voltage Power Switching

[back to top](#)

Product status/pricing/packaging

Product	Product status	Pricing*	Package type	Leads	Packing method
BUT11A	Full Production	\$0.62	TO-220	3	BULK
BUT11ATU	Full Production	\$0.62	TO-220	3	RAIL

* 1,000 piece Budgetary Pricing

[back to top](#)

Application notes

[AN-5015: USB1T11A Transceiver and Specification Compliance](#) (201 K)

Jul 19, 2002

[AN-4105: AN-4105 Design Considerations for Switched Mode Power Supplies Using a Fairchild Power Switch \(SPS\) in a Flyback Converter](#)

(444 K) Jul 19, 2002

[AN-4106: AN-4106 Multiple Output Switched Mode Power Supplies Using Fairchild Power Switch](#) (383 K) Jul 19, 2002

[AN-4111: AN-4111 Fairchild Power Switch Single Chip FSDH Series for Charger and Adapter Use](#) (1497 K) Jul 19, 2002

[AB-28: AB-28 Power Conversion for the Data Communications Market](#) (333 K) Jul 19, 2002

[AN-366: Designer's Encyclopedia of One-Shots](#) (2522 K) Jul 19, 2002

[AN-42009: AN-42009 ML4824 Combo Controller Applications](#) (106 K) Jul 19, 2002

[AN-42031: AN-42031 Multiple Output Design Considerations for the ML4863](#) (179 K) Jul 19, 2002

Related Links

[Request samples](#)

[Dotted line](#)
[How to order products](#)

[Dotted line](#)
[Product Change Notices \(PCNs\)](#)

[Dotted line](#)
[Support](#)

[Dotted line](#)
[Distributor and field sales representatives](#)

[Dotted line](#)
[Quality and reliability](#)

[Dotted line](#)
[Design tools](#)

Datasheet

[Download this](#)

[datasheet](#)



[e-mail this datasheet](#)



This page

[Print version](#)

[AN-55: AN-55 Guidelines for RC5035/36 Motherboard Designs](#) (175 K) Jul 19, 2002

[AN-4116: AN-4116 A Fairchild Power Switch \(SPS\) based on Switched Mode Power Supply for LCD Monitor Use](#) (232 K) Jul 19, 2002

[AN-933: AN-933 Interfacing the NM93C86A Serial EEPROM to the 68HC11 Microcontroller](#) (29 K) Jul 19, 2002

[AN-9018-3: AN-9018-3 \(Part 3 of 3\) Smart Power Module User's Guide](#) (544 K) Jul 19, 2002

[AN-9019: AN-9019 Motor Drive System Using SPM Inverter](#) (260 K) Jul 19, 2002

[AN-140: CMOS Schmitt Trigger - A Uniquely Versatile Design Component](#) (148 K) Jul 19, 2002

[AN-4101: AN-4101 Lithium-Ion Battery Charger and Adapter Using a Fairchild Power Switch \(SPS\)](#) (424 K) Jul 19, 2002

[AN-4102: AN-4102 A Fairchild Power Switch Based SMPS for Color Television Receivers](#) (334 K) Jul 19, 2002

[AN-4103: AN-4103 A Fairchild Power Switch \(SPS\) Based Switched Mode Power Supply for Monitor Use](#) (413 K) Jul 19, 2002

[AN-4108: AN-4108 A Fairchild Power Switch based on Switched Mode Power Supply for CRT Monitor Use](#) (256 K) Jul 19, 2002

[AN-7511: AN-7511 Insulated-Gate Transistors Simplify AC-Motor Speed Control](#) (493 K) Jul 19, 2002

[AN-758: AN-758 Using Fairchild's Microwire EEPROM](#) (57 K) Jul 19, 2002

[AN-909: AN-909 Simple Interface for 68HC11 to Microwire 'Chip Security' EEPROMs](#) (52 K) Jul 19, 2002

[AN-957: AN-957 Interfacing NM24C16 Serial EEPROM to the 8031 Microcontroller](#) (26 K) Jul 19, 2002

[FS6M07652RTC-PB: FS6M07652RTC Product Brief](#) (55 K) Jul 19, 2002

[AN-42046: Application Note 42046 FAN6800 Combo Controller Applications](#) (355 K) Jul 19, 2002

[AN-3008: AN-3008 RC Snubber Networks for Thyristor Power Control and Transient Suppression](#) (930 K) Jul 19, 2002

[back to top](#)

[Home](#) | [Find products](#) | [Technical information](#) | [Buy products](#) | [Support](#) | [Company](#) | [Contact us](#) | [Site index](#) | [Privacy policy](#)

© Copyright 2002 Fairchild Semiconductor
