

Obsolete. Alternative is ZVN0124A.


N-CHANNEL ENHANCEMENT MODE VERTICAL DMOS FET

ISSUE 2 – MARCH 94

ZVN2120A

FEATURES

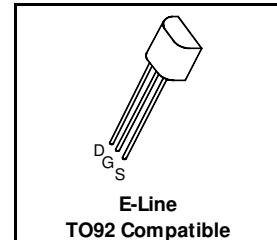- * 200 Volt V_{DS}
- * $R_{DS(on)} = 10\Omega$



ABSOLUTE MAXIMUM RATINGS.







PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	V_{DS}	200	V
Continuous Drain Current at $T_{amb}=25^\circ C$	I_D	180	mA
Pulsed Drain Current	I_{DM}	2	A
Gate Source Voltage	V_{GS}	± 20	V
Power Dissipation at $T_{amb}=25^\circ C$	P_{tot}	700	mW
Operating and Storage Temperature Range	$T_j \cdot T_{stg}$	-55 to +150	°C

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	BV_{DSS}	200		V	$I_D=1\text{ mA}, V_{GS}=0\text{ V}$
Gate-Source Threshold Voltage	$V_{GS(th)}$	1	3	V	$ID=1\text{ mA}, V_{DS}=V_{GS}$
Gate-Body Leakage	I_{GSS}		20	nA	$V_{GS}=\pm 20\text{ V}, V_{DS}=0\text{ V}$
Zero Gate Voltage Drain Current	I_{DSS}		10 100	μA μA	$V_{DS}=200\text{ V}, V_{GS}=0$ $V_{DS}=160\text{ V}, V_{GS}=0\text{ V},$ $T=125^\circ\text{C}(2)$
On-State Drain Current(1)	$I_{D(on)}$	500		mA	$V_{DS}=25\text{ V}, V_{GS}=10\text{ V}$
Static Drain-Source On-State Resistance (1)	$R_{DS(on)}$		10	Ω	$V_{GS}=10\text{ V}, I_D=250\text{ mA}$
Forward Transconductance (1)(2)	g_{fs}	100		mS	$V_{DS}=25\text{ V}, I_D=250\text{ mA}$
Input Capacitance (2)	C_{iss}		85	pF	$V_{DS}=25\text{ V}, V_{GS}=0\text{ V}, f=1\text{ MHz}$
Common Source Output Capacitance (2)	C_{oss}		20	pF	
Reverse Transfer Capacitance (2)	C_{rss}		7	pF	
Turn-On Delay Time (2)(3)	$t_{d(on)}$		8	ns	$V_{DD}\approx 25\text{ V}, I_D=250\text{ mA}$
Rise Time (2)(3)	t_r		8	ns	
Turn-Off Delay Time (2)(3)	$t_{d(off)}$		20	ns	
Fall Time (2)(3)	t_f		12	ns	


(1) Measured under pulsed conditions. Width=300μs. Duty cycle ≤2%

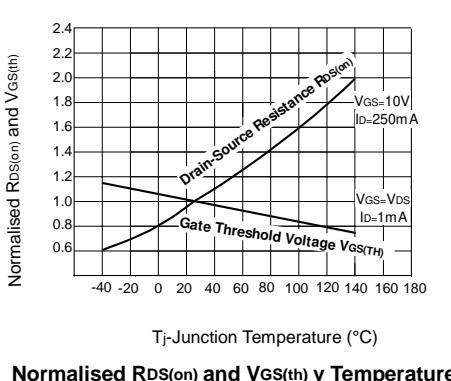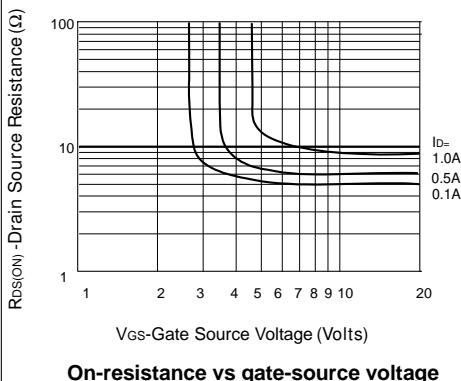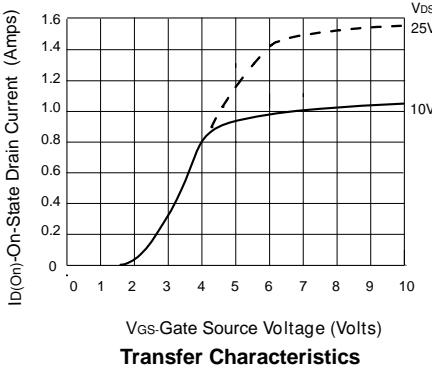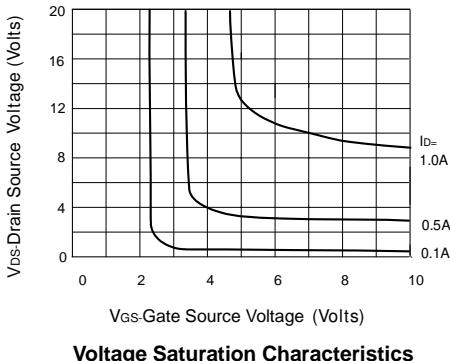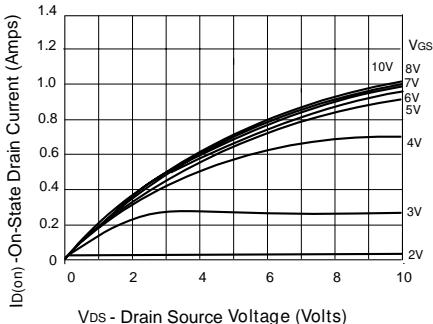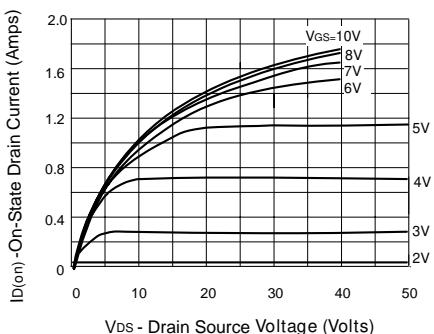(2) Sample test.


TYPICAL CHARACTERISTICS


ZVN2120A

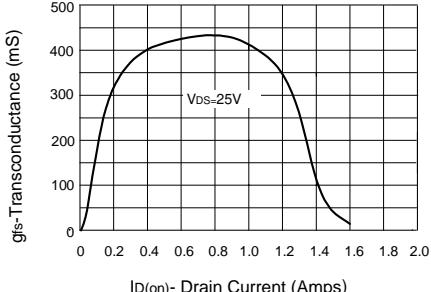
TYPICAL CHARACTERISTICS




Transconductance v drain current

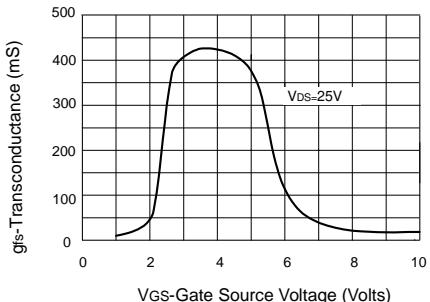

Transconductance v gate-source voltage

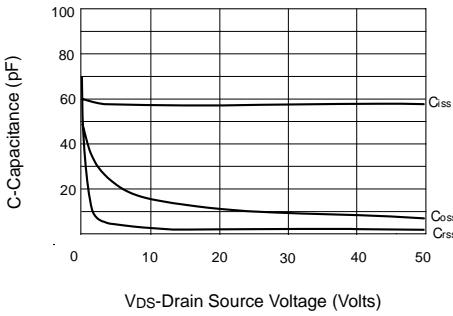

Capacitance v drain-source voltage

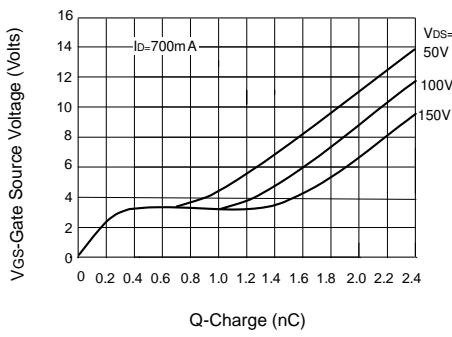

Gate charge v gate-source voltage