AC/DC converter AC100V input, -15V/800mA output


Absolute Maximum Ratings

Parameter	Symbol	Limits	Unit
Input voltage	Vi	-190	V
Output current	lo	800	mApk
ESD endurance	Vsurge	2	kV
Operating temperature range	Topr	-20 to +80	°C
Storage temperature range	Tstg	-25 to +105	°C

Electrical Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Input voltage range	Vi	-120	-141	-162	V	DC
Output voltage	Vo	-14.0	-15.0	-16.0	V	Vi= -141V, Io=800mA
Output current	lo	0	_	800	mA	Vi= -141V *1
Line regulation	Vr	_	0.20	0.45	V	Vi= -120 to -162V, lo=800mA
Load regulation	VI	_	0.50	0.75	V	Vi= -141V, Io=0 to 800mA *2
Output ripple voltage	Vp	-	0.15	0.30	Vp-p	Vi= -141V, Io=800mA
Power conversion efficiency	n	80	85	_	%	Vi= -141V. lo=800mA *2

*1 Maximum output current varies depending on ambient temperature ; please refer to derating curve. *2 Please refer to Load regulation, Conversion efficiency.

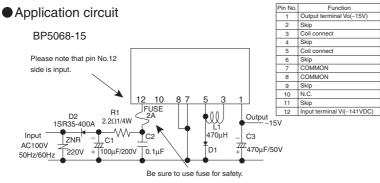


For actual usage, Please kindly evaluate and confirm our part mounted in your product, Especially, Please make sure to confirm the load current does not exceed Max. rated current by using the current probe.


External components setting

C	ternal components setting	
	FUSE: Fuse	Please make sure to use quick acting fuse (2A)
C1: Input capacitor		Above 200V, 47 to 220µF
		Ripple current 0.22Arms above
	C2: For noise terminal	Above 200V, 0.1 to 0.22µF
	voltage reduction capacitor	Film capacitor or Ceramic capacitor
		Reduce the noise terminal voltage.
		The constant value should be evaluated in the product.
	C3: Output capacitor	Above 35V, 330 to 1000µF, Low impedance
		ESR : 0.08Ω Max.
		Ripple current 1Arms above
		Impedance of capacitor effects the output ripple voltage.
	L1: Power inductor	Inductance : 470uH, Rating current : above1.6A
		Choose components that do not easily get magnetically saturation
		in high temperature.
	D1: Flywheel diode	Above 400V, current : above 3A
		Fast recovery diode.
		Please note that both the switching and efficiency characteristics
		of the module are affected by this diode.
		Recommended products : 31DF4 (Nihon Inter)
	D2: Rectifier diode	Use a rectifying diode with the peak reverse voltage of 400V or higher,
		the average rectification current of 1A or larger and the peak surge
		current of 20A or larger. When using an input capacitor of a large capacity,
		choose a component that endures the inrush current on power-up.
		This product is compatible with full-wave rectification.
	R1: For noise terminal	1 to 22Ω , $1/4W$
	voltage reduction resistor	Reduce the noise terminal voltage.
	ZNR: Varistor	The constant value should be evaluated in the product. Varistor must be used. It protects this part from lightning surge and static
	LIND. VALISIUL	electricity.
		cioculory.


Dimensions (Unit : mm)




Derating Curve




Conversion Efficiency



Load Regulation



Surface Temperature Rising



BP5068-15

Power Module Usage Precautions

Safety Precautions

- 1) The products are designed and manufactured for use in ordinary electronic equipment (i.e. AV/OA/ telecommunication/amusement equipment, home appliances). Please consult with the Company's (ROHM) sales staff if intended for use in devices requiring high reliability (e.g. medical/transport/ aircraft/spacecraft equipment, nuclear power/fuel controllers, automotive/safety devices) and whose malfunction may result in injury or death. In this case, failsafe measures must be taken, including the following:
 - [a] Installation of protection circuits in order to improve system safety
 - [b] Incorporation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use under normal conditions. Application in special environments can cause a deterioration in product performance. Therefore, verification and confirmation of product performance, prior to use, is recommended. The following environments are considered to be 'special':

 [a] Outdoors, exposed to direct sunlight or dust
 - [b] In contact with liquids, such as water, oils, chemicals, or organic solvents
 - [c] In areas where exposure to the sea air or corrosive gases (i.e. Cl₂, H₂S, NH₃, SO₂, NO₂) can occur
 - [d] In places where the products may be in contact with static electricity or electromagnetic waves
 - [e] In proximity to heat-producing items, plastic cords, or flammable materials
 - [f] In contact with sealing or coating products, such as resin
 - [g] In contact with unclean solder or exposed to water or water-soluble cleaning agents used after soldering
 - [h] In areas where dew condensation occurs
- 3) The products are not designed to be radiation resistant
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Application Notes

- 1) A sufficient margin must be allowed if changes are made to the peripheral circuit due to variations in the inherent tolerances of the external components as well as transient and static characteristics. In addition, please be aware that the Company has not conducted investigations on whether or not particular changes in the example application circuits would result in patent infringement.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.

Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Notes Regarding Industrial Property /

- 1) The specifications included herein contain information related to the Company's industrial property. Their use other than pertaining to the relevant products is forbidden. Duplication and/or disclosure to a third party without express written permission is strictly prohibited.
- 2) Product information and data, including application examples, contained in the specifications are for reference purposes only; the Company does not guarantee the industrial/intellectual property rights or any other rights of a third party. Accordingly, the Company shall not bear responsibility for:
 [a] Infringement of the intellectual property rights of a third party
 [b] Problems arising from the use of the products listed herein
- 3) The Company prohibits the purchaser from exercising or using the intellectual/industrial property rights or any rights belonging to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the
 product described in this document are for reference only. Upon actual use, therefore, please request
 that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or
 otherwise dispose of the same, no express or implied right or license to practice or commercially
 exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD. ROHM CO., LTD. 21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan TEL : +81-75-311-2121 FAX : +81-75-315-0172

Appendix1-Rev2.0

ROHM