



## P0K1.232.4W.K.010


### Platinum sensor with wires

### For medium temperatures

#### Benefits & Characteristics

- Outstanding long-term stability
- Low self-heating
- Fast response time
- Vibration and temperature shock resistant
- Excellent solderability

#### Illustration<sup>1)</sup>

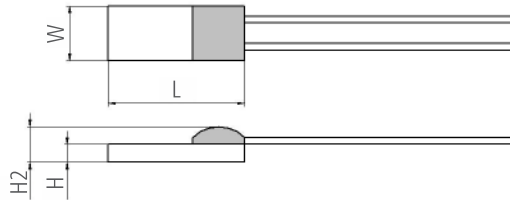

#### Technical Data

Operating temperature range:	-200 °C to +400 °C	
Nominal resistance:	100 $\Omega$ at 0 °C	
Characteristics curve:	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class (in range between +20 °C and + 25 °C):	1/10 IEC 60751 F0.3	K (IST AG reference)
Connection:	Ag-wire, $\varnothing$ 0.25 mm, 10 mm long	
Dimensions:	2.2 x 2.0 x 0.65 / 1.1	
Tolerance (chip):	L $\pm$ 0.2 mm, W $\pm$ 0.2 mm, H $\pm$ 0.1 mm, H2 $\pm$ 0.3 mm	

#### Product Photo





## Order Information

Description:

P0K1.232.4W.K.010

Item number:

153703

## Additional Documents

Application Note:

Document name:

ATP\_E



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland  
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: [info@ist-ag.com](mailto:info@ist-ag.com) | [www.ist-ag.com](http://www.ist-ag.com)

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved

P0K1.232.4W.K.010