

Double-Balanced Mixer

Rev. V3


Features

- LO 7 TO 17 GHz
- RF 9 TO 15 GHz
- IF DC TO 2.5 GHz
- LO DRIVE: +10 dBm (NOMINAL)
- LOW NOISE FIGURE: 6.5 dB (TYP.)

Description

The M67 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image

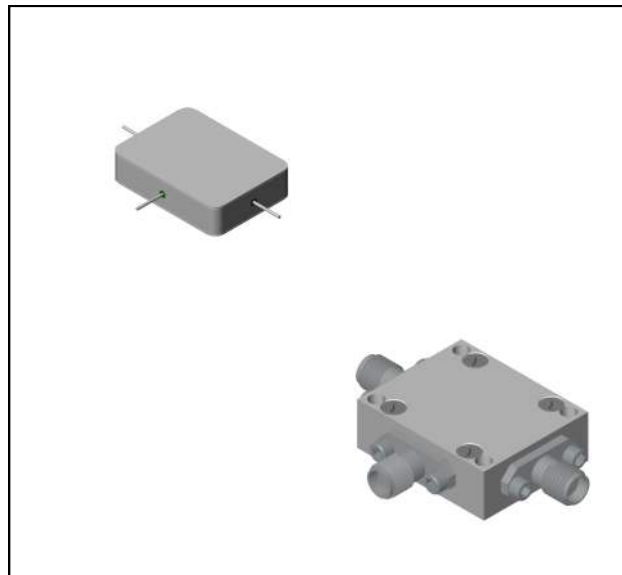

Ordering Information

Part Number	Package
M67	Minpac
M67C	SMA Connectorized

M/A-COM Technology Solutions Inc. All rights reserved.


Electrical Specifications is $Z_0 = 50\Omega$, $Lo = +10\text{ dBm}$ (Down Converter Application only) products. These materials are provided by MACOM as a service to its customers and may be used for

Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 9.5 to 13 GHz, fL = 9 to 13.5 GHz, fl = 30 to 500 GHz	dB	5.5	7.0	7.5
	fR = 9 to 15 GHz, fL = 8 to 16 GHz, fl = 30 to 1000 GHz	dB	6.5	8.5	9.0
	fR = 9 to 15 GHz, fL = 7 to 17 GHz, fl = 30 to 2000 GHz	dB	6.5	9.0	9.5
	fR = 9.5 to 13.5 GHz, fL = 7 to 16 GHz, fl = 30 to 2500 GHz	dB	6.5	9.0	9.5
Isolation, L to R (min)	fL = 7 to 15 GHz	dB	40	22	20
	fL = 15 to 17 GHz	dB	30	10	8
Isolation, L to I (min)	fL = 7 to 17 GHz	dB	25	15	13
1 dB Conversion Comp.	fL = +10 dBm	dBm	+4		
Input IP3	fR1=11.5 GHz at -6 dBm, fR2=11.5GHz at -6 dBm, fL = 12 GHz at +10 dBm	dBm	+11		


MACOM does not warrant or assume any liability for any damages resulting from such improper use or care.

Typical Performance Curves



Conversion Loss vs. LO Drive

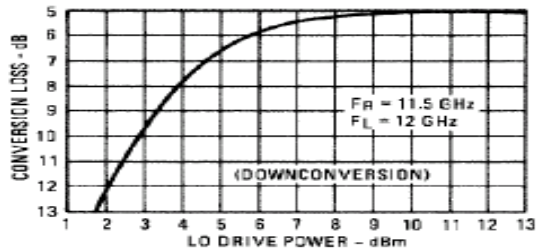


Conversion Loss vs. RF Input Power

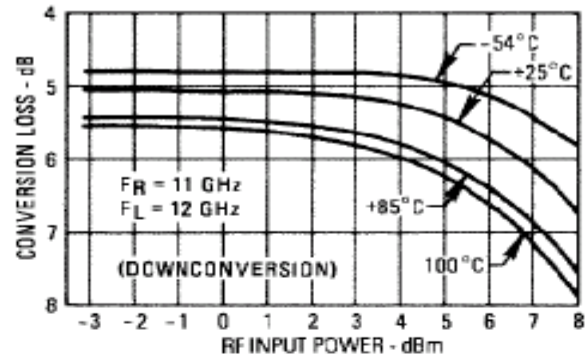


Conversion Loss vs. Frequency

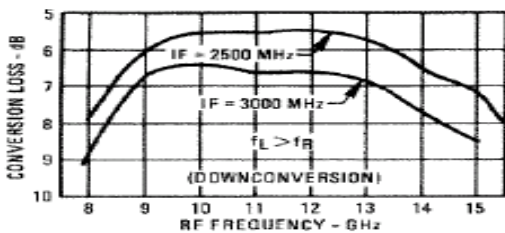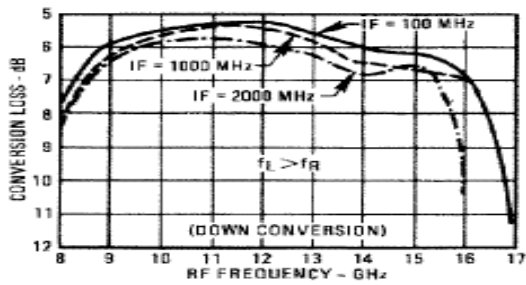


Isolation vs. Frequency

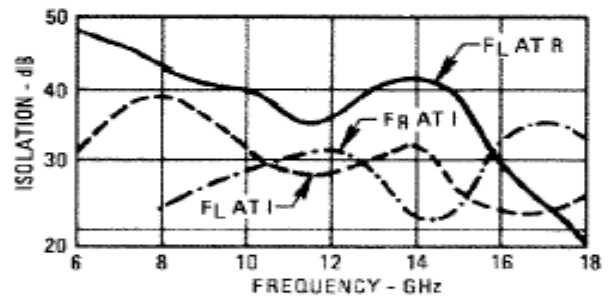

Conversion Loss vs. Output Frequency

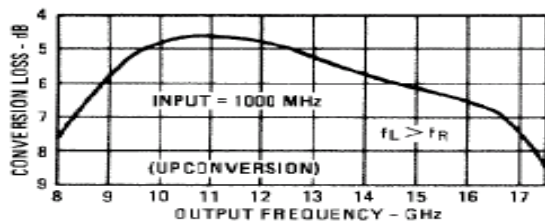

L-Port VSWR vs. Frequency

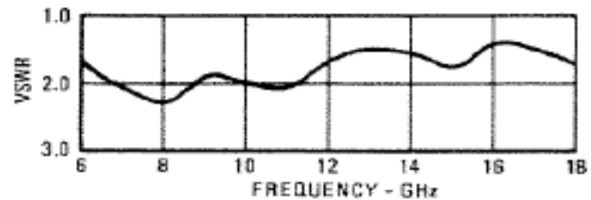

Solutions with DM as a component, MACOM's commitment, MACOM's presence in the market, without compromise. No license document.

WITHOUT VSWR OF M. A PAR INFR COM FU EXT, GR ABLE F OUT LIMITATION, LOST REVENUES OR LOST PROFITS, MATERIALS.

Medical, lifesaving or life sustaining applications. MACOM is in such applications do so at their own risk and agree to indemnify from such improper use or sale.

