

MC2206128-004-C

NVIDIA Mellanox® Compatible 40Gb/s QSFP+ Direct Attach Cable Copper, Passive, 4m

FEATURES

- Compliant with SFF- 8436, SFF-8431, SFF-8432 and SFF-8472
- Up to 40Gb/s data rate per channel
- Up to 7m transmission available
- Operating temperature: 10°C ~ 70°C
- Single 3.3V power supply
- RoHS compliant
- Cost-effective copper solution
- Lowest total system power solution
- Lowest total system EMI solution
- Optimized design for Signal Integrity

APPLICATIONS

Data

- Servers
- Networked storage systems
- Routers
- External storage systems
- Data Center networking

Communications

- **Switches**
- Routers

INDUSTRIAL STANDARDS

- InfiniBand Trade Association (IBTA)
- IEEE802.3ba
- 40Gigabit Ethernet (40G BASE CR4)



DESCRIPTION


ATGBICS® Compatible MC2206128-004-C QSFP+ (Quad Small Form-factor Pluggable Plus) copper directattach cables are suitable for very short distances and offer a highly cost-effective way to establish a 40-Gigabit link between QSFP+ ports of QSFP+ switches within racks and across adjacent racks. These cables are used for 40GbE and Infiniband standards, to maximize performance. QSFP+ are designed to meet emerging data center and high-performance computing application needs for a high-density cabling interconnect system capable of delivering an aggregate data bandwidth of 40Gb/s. This interconnect system is fully compliant with existing industry standard specifications such as the QSFP MSA and IBTA (InfiniBand Trade Association). The QSFP+ cables support the bandwidth transmission requirements as defined by IEEE 802.3ba (40 Gb/s) and InfiniBand QDR (4x10 Gb/s per channel) specifications.




QSFP+ Pin Function Definition

1 GND Ground 2 CML-I Tx2n Transmitter Inverted Data Input 3 CML-I Tx2p Transmitter Non-Inverted Data Input 4 GND Ground 5 CML-I Tx4n Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 Vcc Rx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n	Pin	Logic	Symbol	Description	
3	1	- J			
4 GND Ground 5 CML-I Tx4n Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 Vcc Rx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3p Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx4n	2	CML-I	Tx2n		
5 CML-I Tx4n Transmitter Inverted Data Input 6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTL-I ResetL Module Reset 10 Vcc Rx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx4n Receiver Inverted Data Output 23 <t< th=""><th>3</th><th>CML-I</th><th>Tx2p</th><th colspan="2">·</th></t<>	3	CML-I	Tx2p	·	
6 CML-I Tx4p Transmitter Non-Inverted Data Input 7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 Vcc Rx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2n Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output	4		GND	Ground	
7 GND Ground 8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 Vcc Rx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Recei	5	CML-I	Tx4n		
8 LVTTL-I ModSelL Module Select 9 LVTTL-I ResetL Module Reset 10 Vcc Rx +3.3V Power Supply Receiver 11 LVCMOS- I/O SCL 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2n Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4p Receiver Non-Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter	6	CML-I	Tx4p		
9 LVTTL-I ResetL Module Reset 10 Vcc Rx +3.3V Power Supply Receiver 11 LVCMOS-I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O	7		GND	Ground	
10	8	LVTTL-I	ModSelL	Module Select	
11 LVCMOS- I/O SDA 2-wire serial interface clock 12 LVCMOS- I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4n Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	9	LVTTL-I	ResetL	Module Reset	
11 I/O SCL 2-wire serial interface clock 12 LVCMOS-I/O SDA 2-wire serial interface data 13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	10		Vcc Rx	+3.3V Power Supply Receiver	
13 GND Ground 14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	11	I/O	SCL	2-wire serial interface clock	
14 CML-O Rx3p Receiver Non-Inverted Data Output 15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply			_	2-wire serial interface data	
15 CML-O Rx3n Receiver Inverted Data Output 16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	-		_	0.00	
16 GND Ground 17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply					
17 CML-O Rx1p Receiver Non-Inverted Data Output 18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply		CML-O			
18 CML-O Rx1n Receiver Inverted Data Output 19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply					
19 GND Ground 20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply				·	
20 GND Ground 21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	_	CML-O			
21 CML-O Rx2n Receiver Inverted Data Output 22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	_		_		
22 CML-O Rx2p Receiver Non-Inverted Data Output 23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply					
23 GND Ground 24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply				·	
24 CML-O Rx4n Receiver Inverted Data Output 25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply		CML-O		•	
25 CML-O Rx4p Receiver Non-Inverted Data Output 26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	_				
26 GND Ground 27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply					
27 LVTTL-O ModPrsL Module Present 28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply	_	CML-O		· ·	
28 LVTTL-O IntL Interrupt 29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply		11/771 0	_		
29 Vcc Tx +3.3V Power supply transmitter 30 Vcc1 +3.3V Power supply					
30 Vcc1 +3.3V Power supply	_	LV I IL-U		· · · · · · · · · · · · · · · · · · ·	
31 LVTTL-I LPMode Low Power Mode	31	LVTTL-I		Low Power Mode	
	_	LV I I L-I		Ground	
	_	CMLI	0.12	Transmitter Non-Inverted Data Input	
34 CML-I Tx3n Transmitter Inverted Data Input					
		OIVIL-I		Ground	
36 CML-I Tx1p Transmitter Non-Inverted Data Input		CMI -I			
37 CML-I Tx1n Transmitter Inverted Data Input					
38 GND Ground		OIVIL I		·	





Top Side Viewed From Top





Bottom Side Viewed From Bottom



SFP+ Pin Function Definition

Pin	Logic	Symbol	Description	
1		VeeT	Module Transmitter Ground	
2	LVTTL-O	Tx_Fault	Module Transmitter Fault	
3	LVTTL-I	Tx_Disable	Transmitter disable; Turns off transmitter laser output	
4	LVTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i)	
5	LVTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 in INF-8074i)	
6		Mod_ABS	Module Absent, connected to VeeT or VeeR in the module	
7	LVTTL-I	RS0	Rate Select 0, optionally controls SFP+ module receiver	
8	LVTTL-O	Rx_LOS	Receiver Loss of Signal Indication (In FC designated as Rx_LOS and in Ethernet designated as Signal Detect)	
9	LVTTL-I	RS1	Rate Select 1, optionally controls SFP+ module transmitter	
10		VeeR	Module Receiver Ground	
11		VeeR	Module Receiver Ground	
12	CML-O	RD-	Receiver Inverted Data Output	
13	CML-O	RD+	Receiver Non-Inverted Data Output	
14		VeeR	Module Receiver Ground	
15		VccR	Module Receiver 3.3 V Supply	
16		VccT	Module Transmitter 3.3 V Supply	
17		VeeT	Module Transmitter Ground	
18	CML-I	TD+	Transmitter Non-Inverted Data Input	
19	CML-I	TD-	Transmitter Inverted Data Input	
20		VeeT	Module Transmitter Ground	







General Product Characteristics

Q/4SFP+ DAC Specifications	
Number of Lanes	Tx & Rx
Channel Data Rate	40Gbps
Operating Temperature	0 to + 70°C
Storage Temperature	-40 to + 85°C
Supply Voltage	3.3 V nominal
Electrical Interface	38 pins edge connector (QSFP+) 20 pins edge connector (SFP+)
Management Interface	Serial, I2C

High Speed Characteristics


Parameter	Symbol	Min	Typical	Max	Unit	Note
Differential Impedance	TDR	90	100	110	Ω	
Insertion loss	SDD21	-17.04			dB	At 5.15625 GHz
Differential Poture Less	SDD11			See 1	dB	At 0.05 to 4.1 GHz
Differential Return Loss	SDD22			See 2	dB	At 4.1 to 11.1 GHz
Differential to common mode	SCD11			-10 dB	dB	At 0.2 to 11.1 GHz
return loss	SCD22			-10	uБ	At 0.2 to 11.1 GHZ
Common-mode to common-	SCC11	-3		dB	At 0.01 to 11.1 GHz	
mode output return loss	SCC22		-3		uБ	ALU.UT IU TT. T GHZ

Notes:

- 1. Reflection Coefficient given by equation SDD11(dB) < -12 + 2 × SQRT (f), with f in GHz
- 2. Reflection Coefficient given by equation SDD11(dB) < -6.3 + 13 × log10(f/5.5), with f in GHz

Mechanical Information

The connector is compatible with the SFF-8436 to SFF-8432 specification

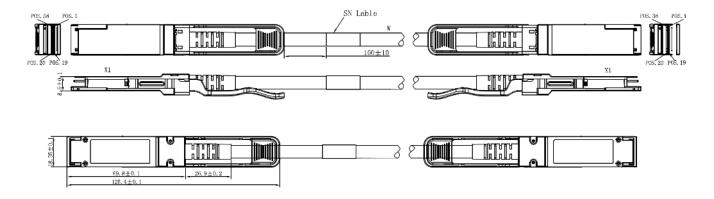



Regulatory Compliance

Feature	Test Method	Performance	
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883C Method 3015.7	Class 1(>2000 Volts)	
Electromagnetic	FCC Class B	Compliant with	
Interference (EMI)	CENELEC EN55022 Class B CISPR22 ITE Class B	Standards	
RF Immunity (RFI)	IEC61000-4-3	Typically Show no Measurable Effect from a 10V/m Field Swept from 80 to 1000MHz	
RoHS Compliance	RoHS Directive 2011/65/EU and it's Amendment Directives (EU) 2015/863	RoHS (EU) 2015/863 compliant	
REACH Compliance	REACH Regulation (EC) No 1907/2006	REACH (EC) No 1907/2006 compliant	

AWG Information

Cable Length (m)	AWG
0.5	30
1	30
2	30
3	28/30
4	28
5	24
7	24