
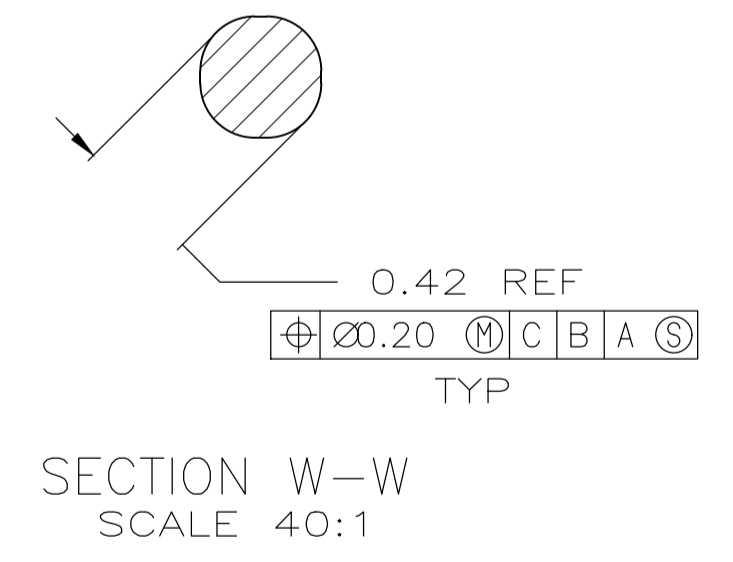
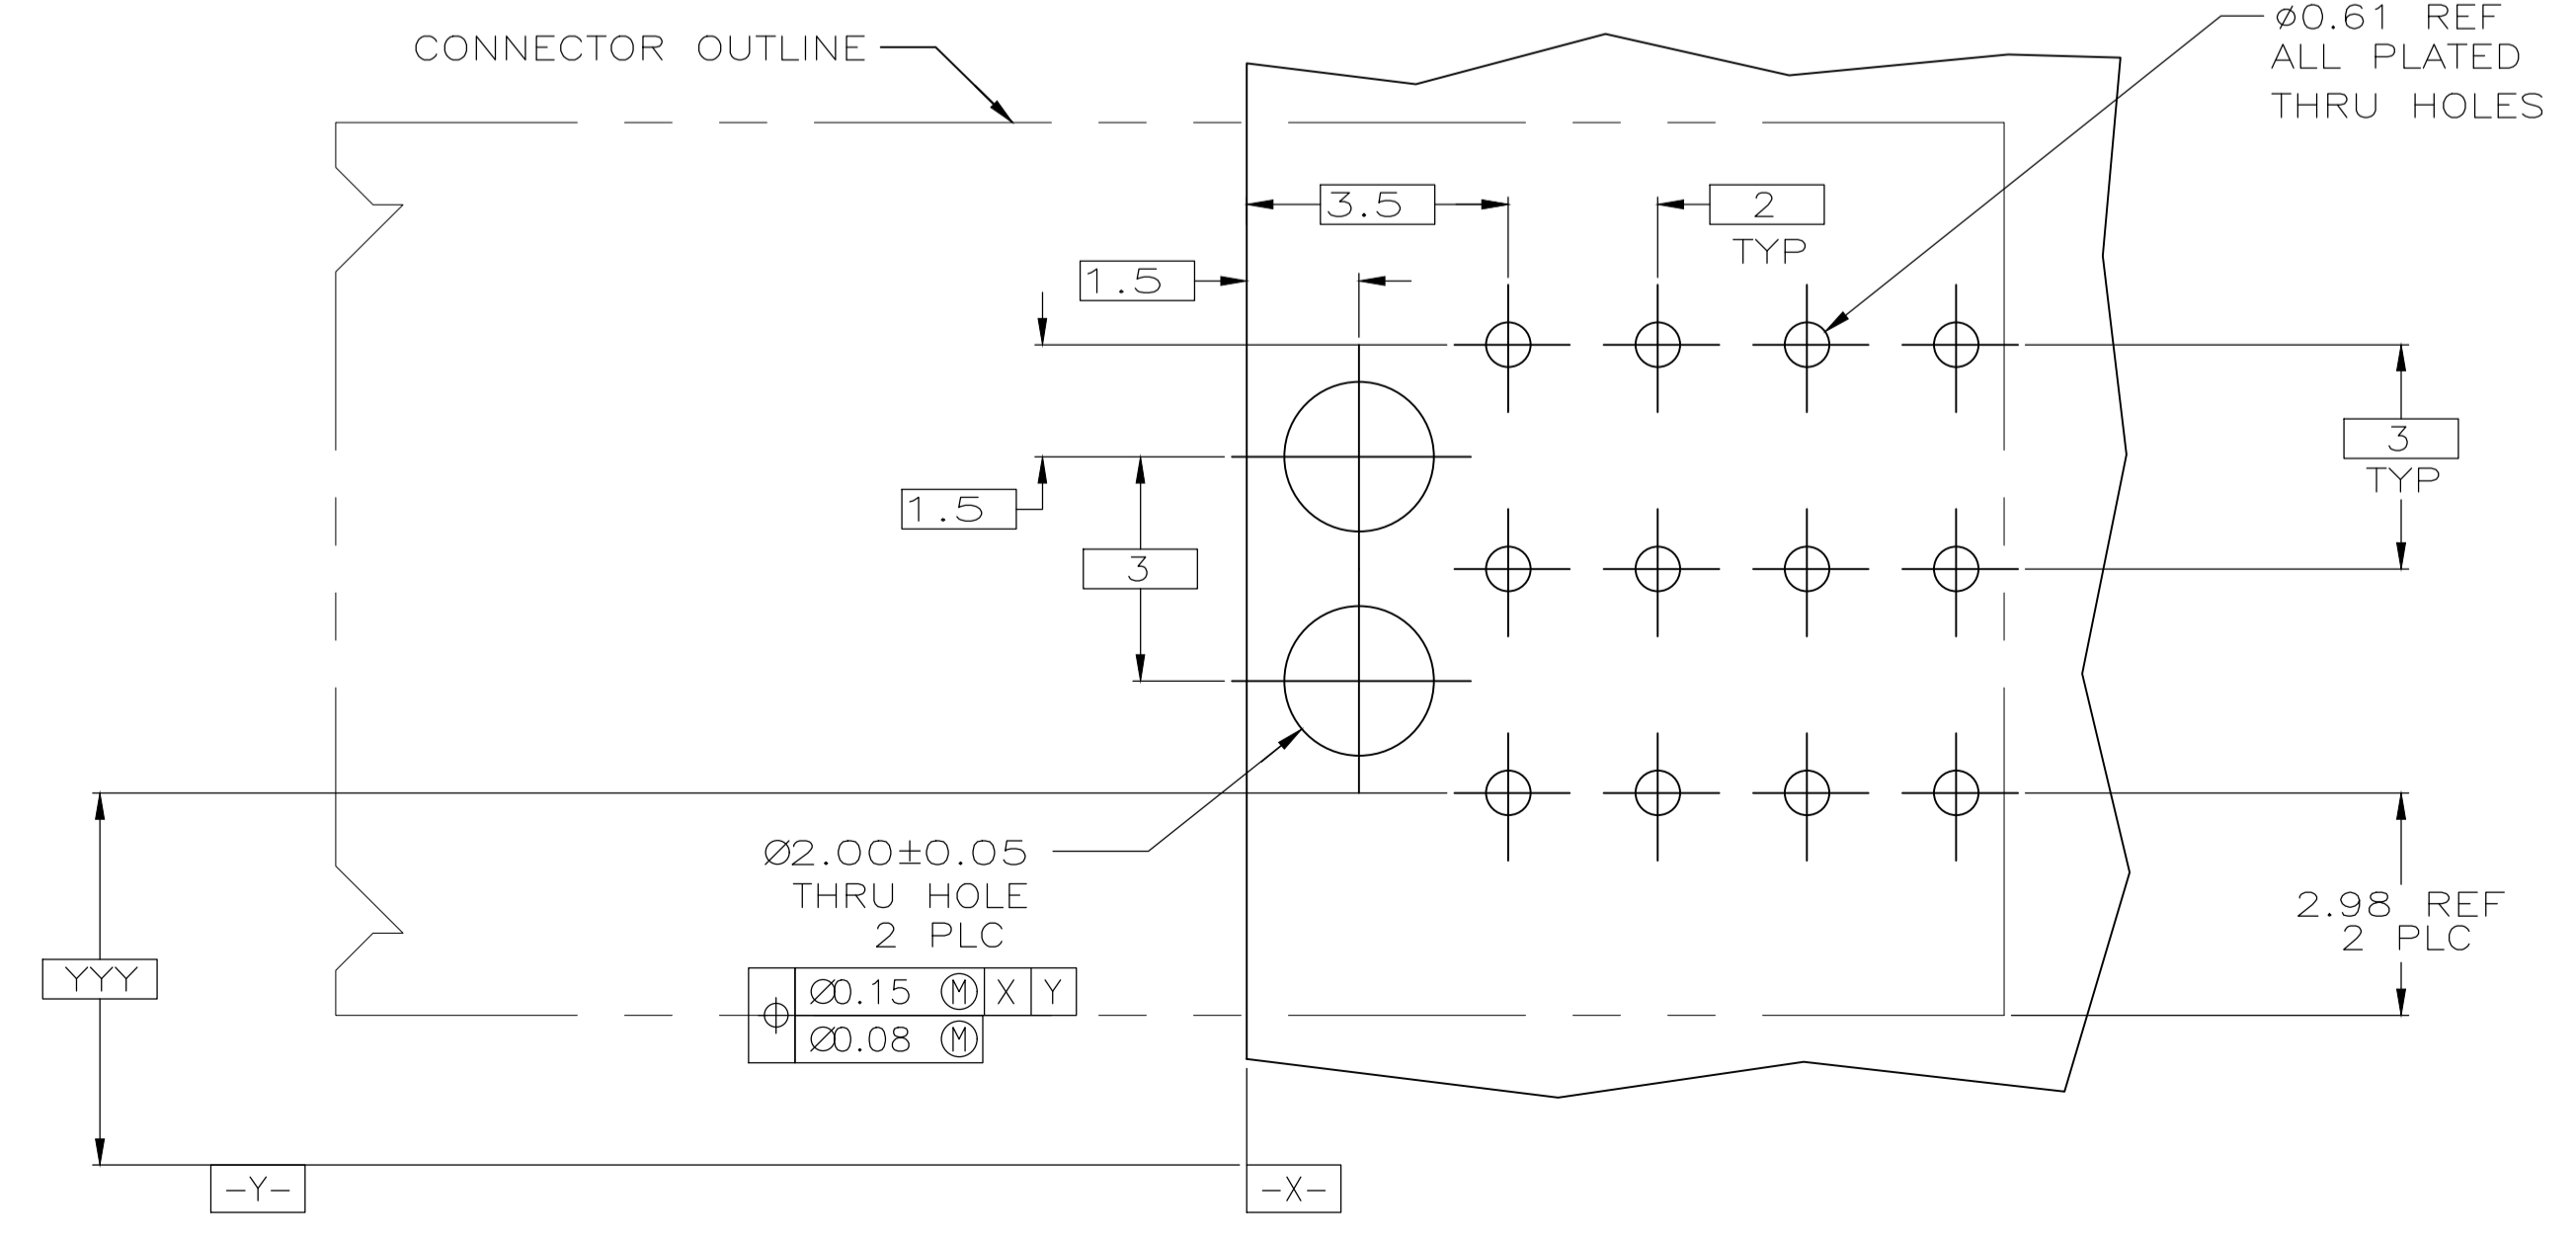
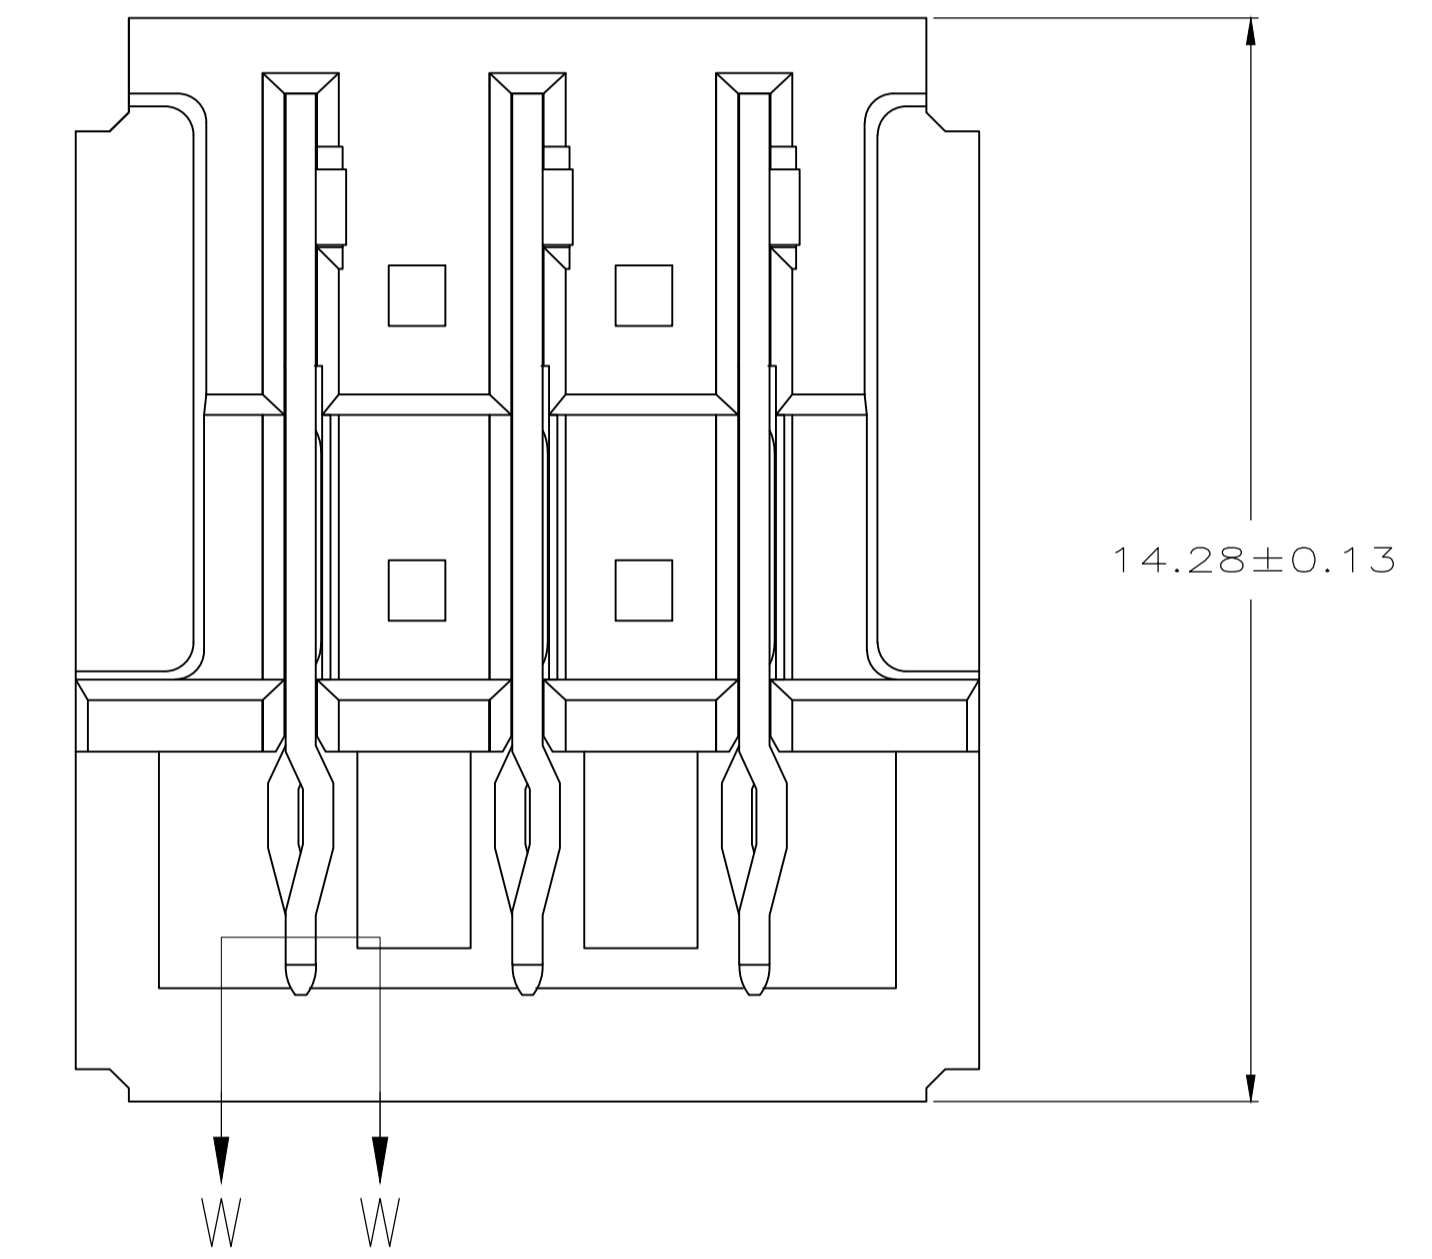
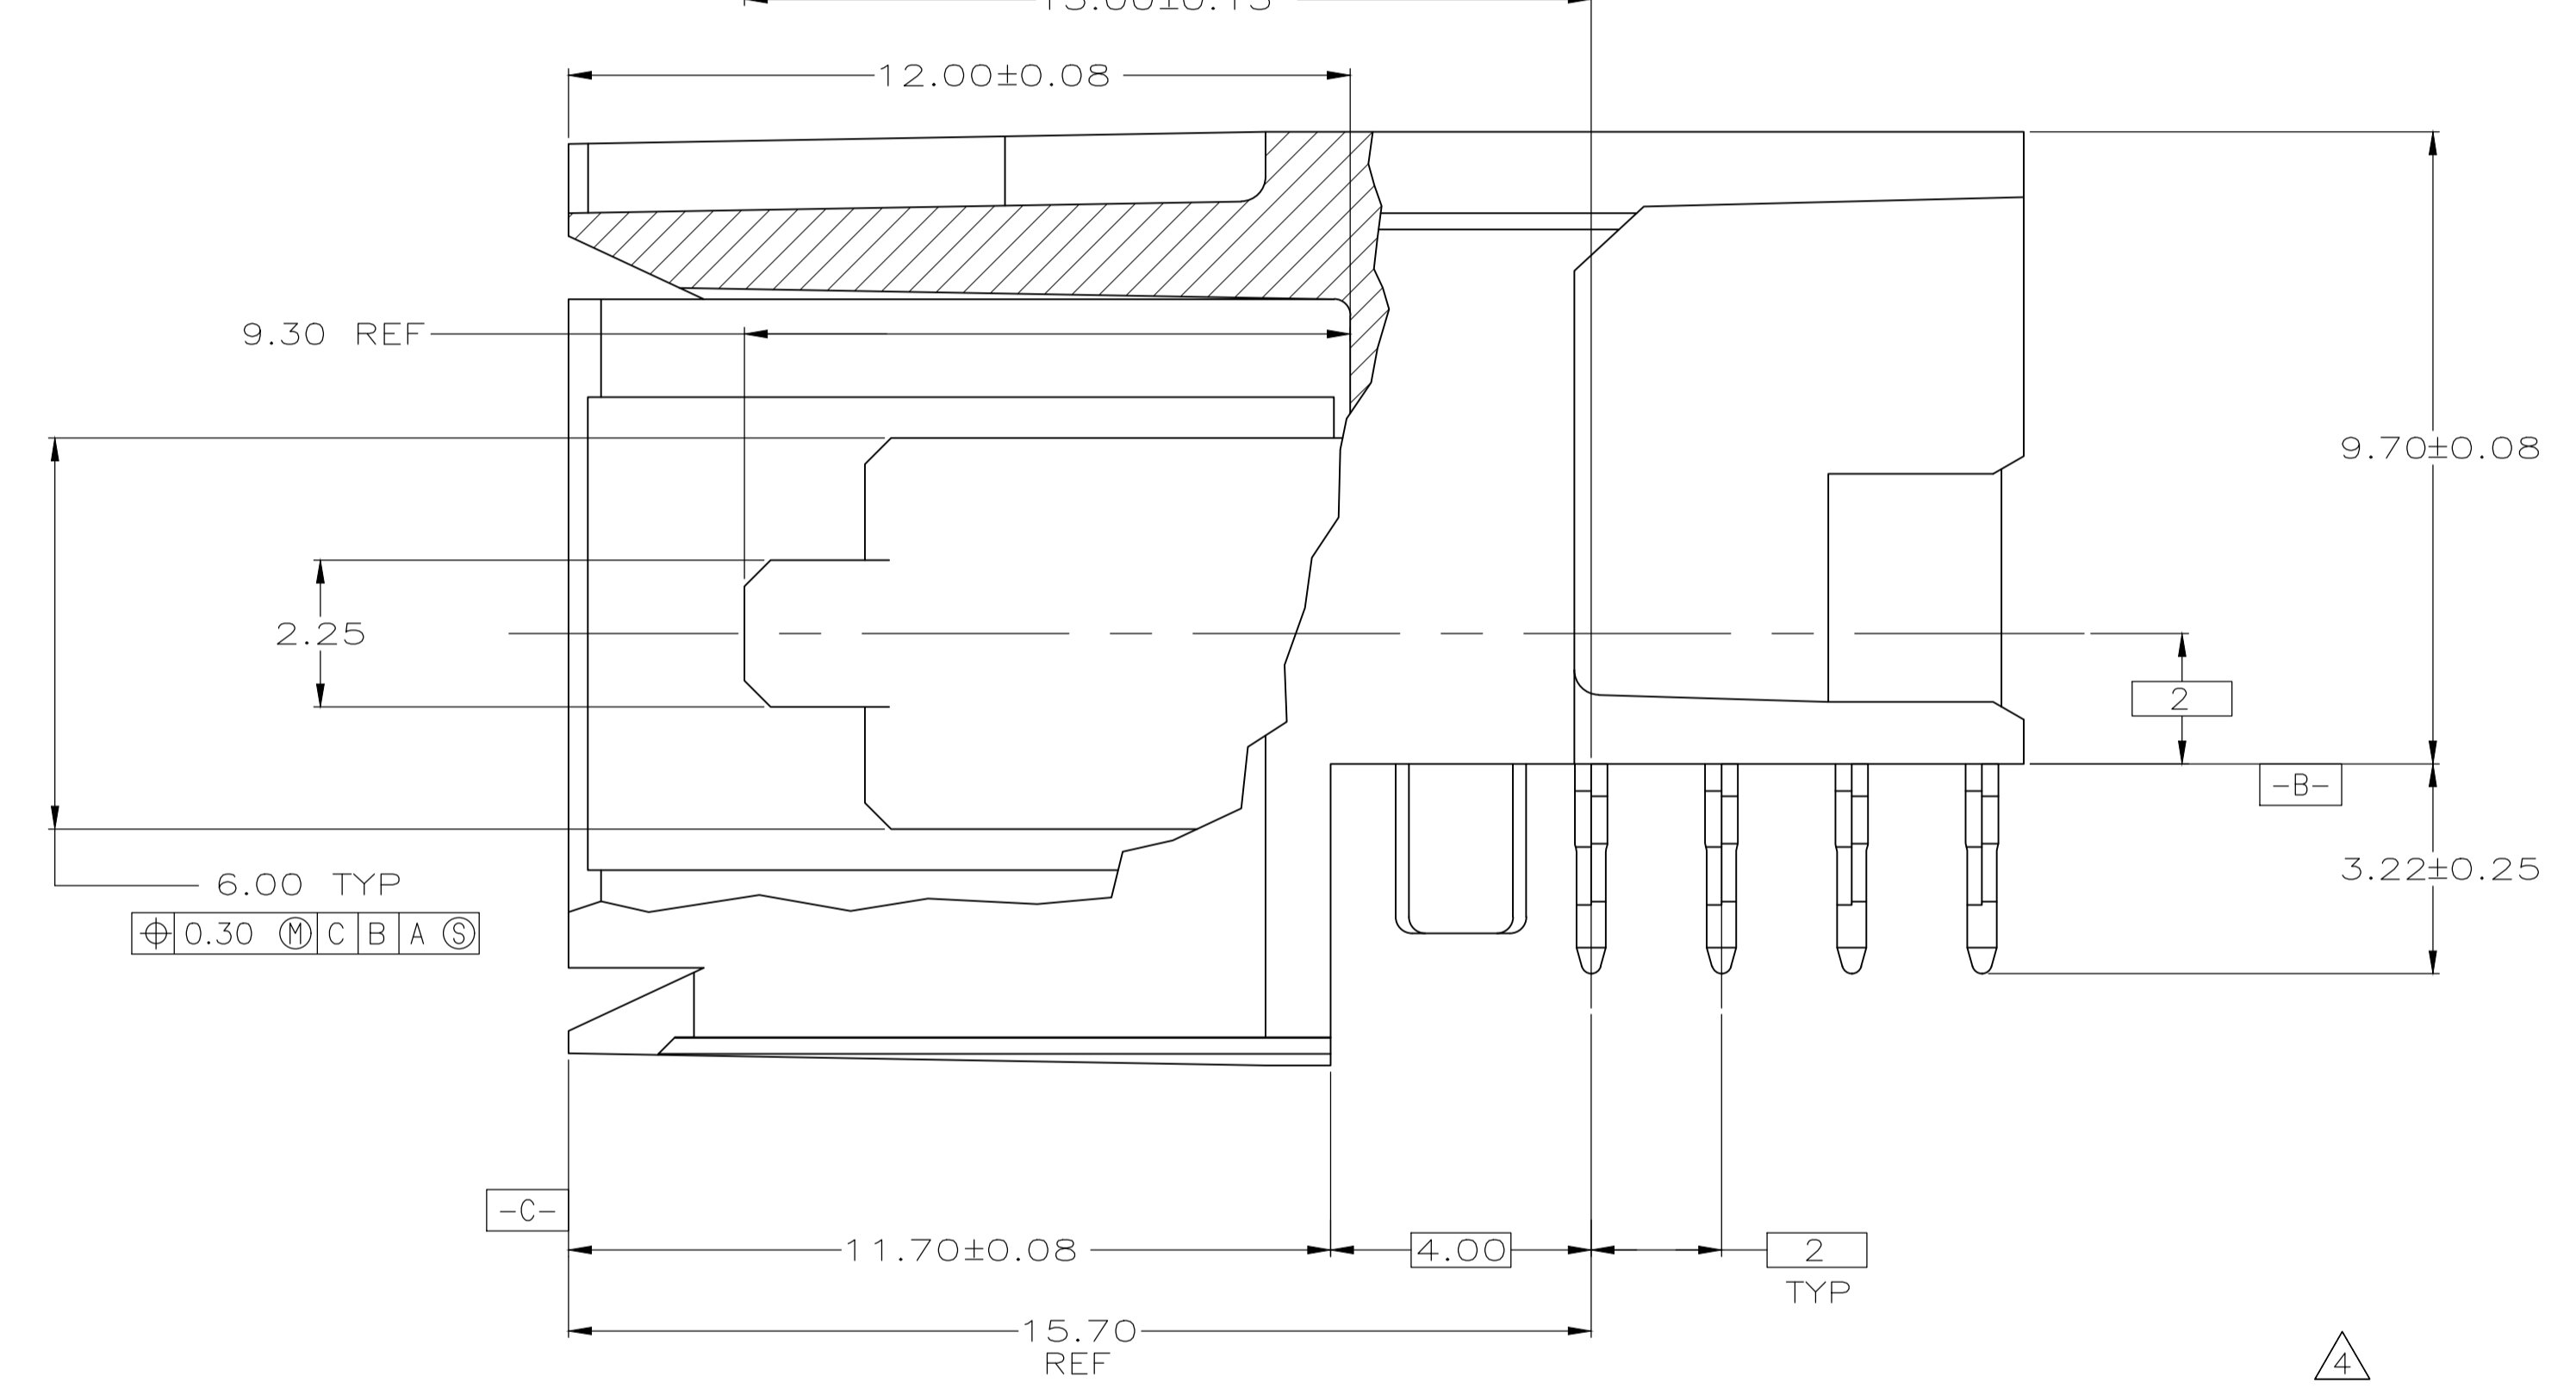


- 1 MATERIAL: HOUSING: POLYESTER, COLOR: GRAY. UL 94V-0
CONTACT: PHOSPHOR BRONZE.
- 2 FINISH: CONTACT MATING AREA: 1.27µm MIN GOLD OR 0.08µm MIN GOLD OVER
0.76µm MIN PALLADIUM-NICKEL.
ACTION PIN AREA: 0.5µm MIN TIN PLATE,
ALL OVER 1.27µm MIN NICKEL UNDERPLATE.
- 3 FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED
LUBRICANT. TECHNICAL REFERENCE: TR-NWT-001217
ISSUE 1, SEPT 1992.
- 4 REFERENCE APPLICATION SPEC 114-1103 FOR
RECOMMENDED PLATED THRU HOLE DIAMETER AND
PLATING THICKNESS.
- 5 CURRENT RATING 10A/CONTACT PER PRODUCT SPEC 108-1651.

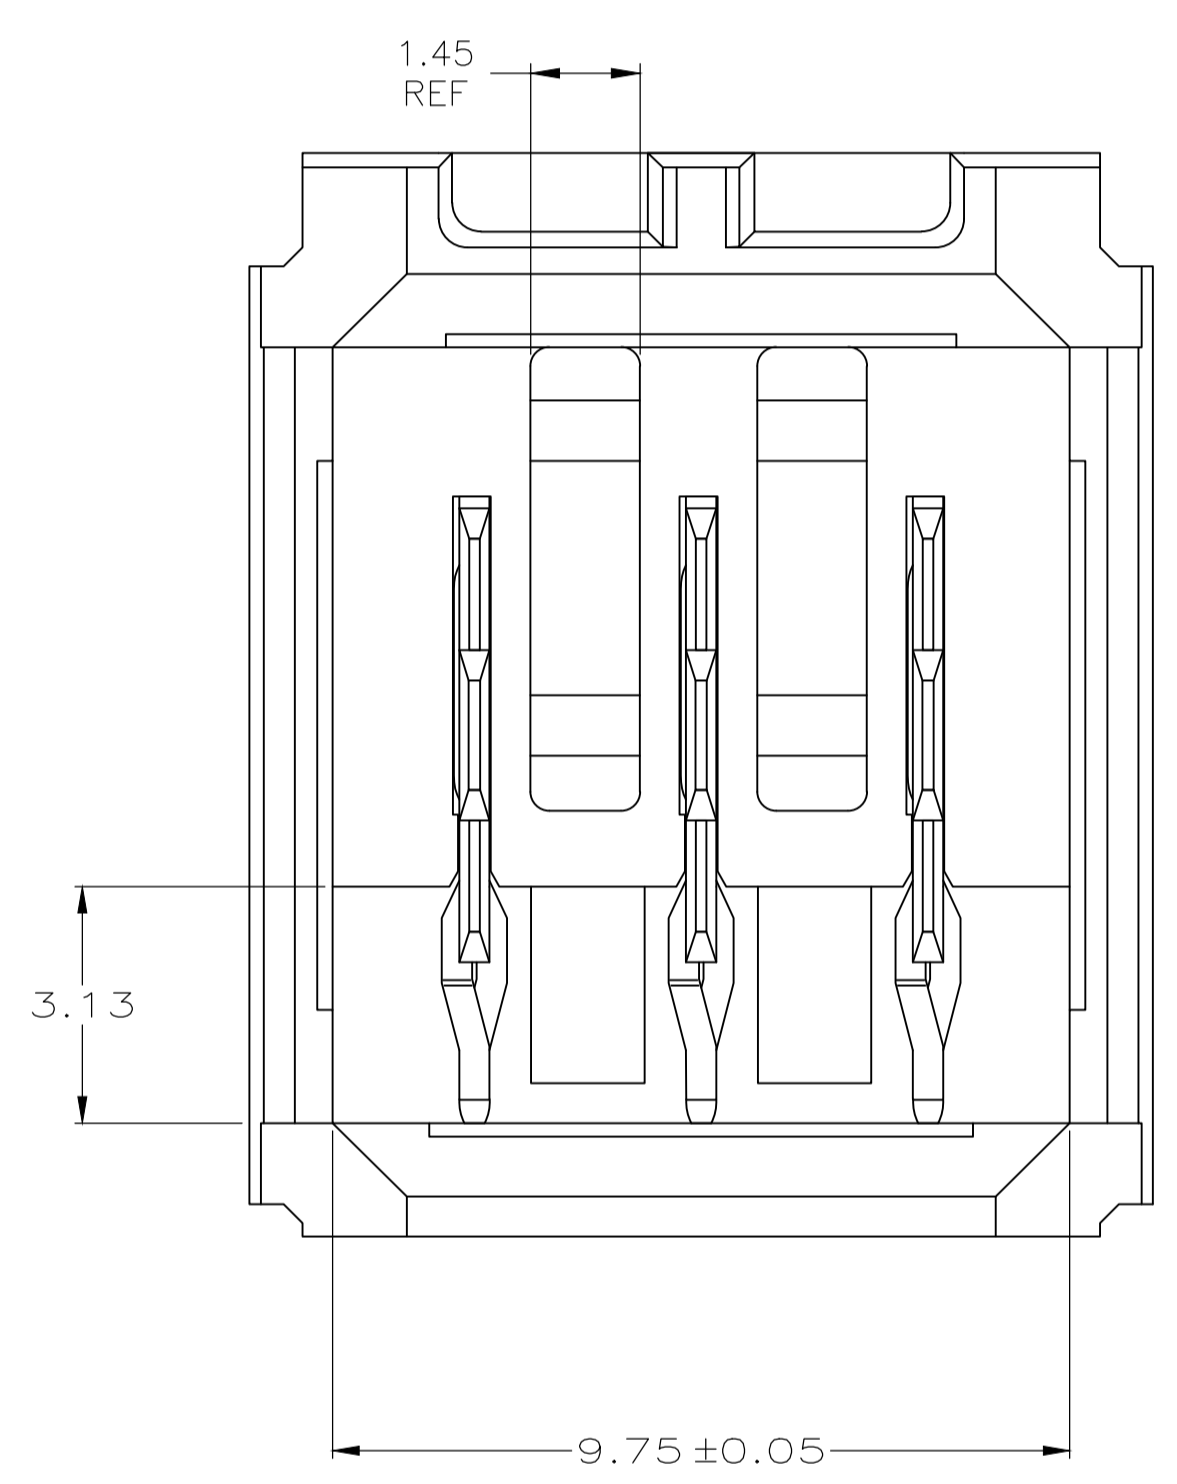

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN B CARBO 10DEC04	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm		CHK R PATTERSON 10DEC04	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D R PATTERSON 10DEC04	NAME
0 PLC	± -	PRODUCT SPEC	
1 PLC	± -	APPLICATION SPEC	
2 PLC	± 0.13	SIZE	CAGE CODE DRAWING NO
3 PLC	± -	A1	00779 C=5223967
4 PLC	± -	WEIGHT	-
ANGLES	± -	CUSTOMER DRAWING	SCALE 10:1 SHEET 1 OF 1 REV C1

RECOMMENDED PCB HOLE LAYOUT