



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REVISIONS		DATE	APPROVED
REV. A	DESCRIPTION NEW RELEASE	3/DEC/2013	

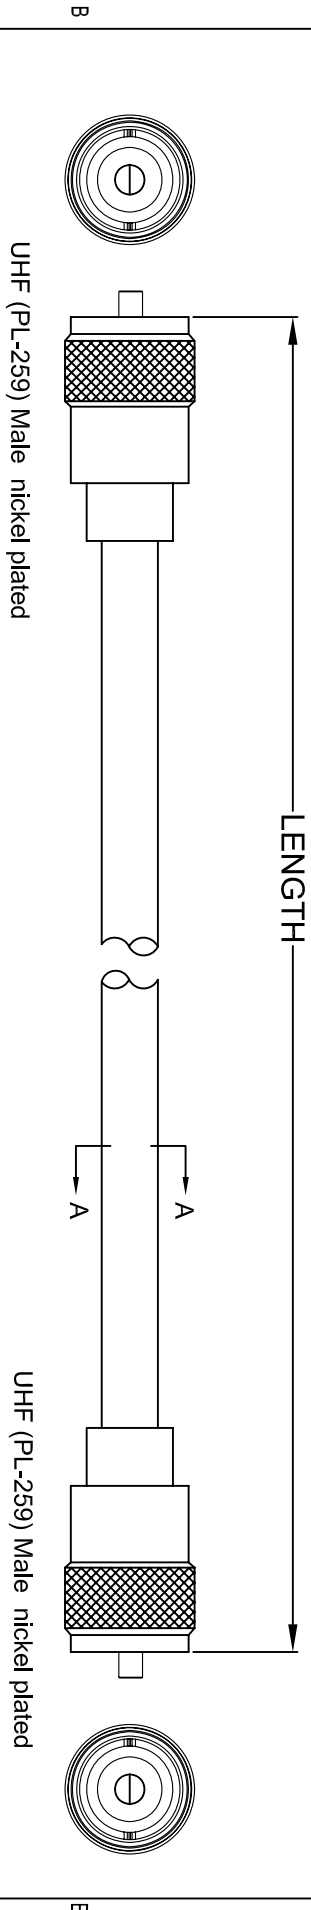

SECTION A-A

LENGTH & P/N Table

LENGTH	P/N
5FT(1524±30mm)	CO-213UHFMXX20-005
10FT(3048±40mm)	CO-213UHFMXX20-010
15FT(4572±50mm)	CO-213UHFMXX20-015
25FT(7620±100mm)	CO-213UHFMXX20-025
50FT(15240±150mm)	CO-213UHFMXX20-050
100FT(30480±300mm)	CO-213UHFMXX20-100

- NOTES:
- CABLE:[12AWG(7/0.7526±0.02mm)*1C +BRAID(24*9/0.12±0.008mm)] BARE COPPER INSULATION:PE OD= 7.24±0.15mm ;COLOR:TRANSPARENT JACKET:HALF MATTE PVC LOW TOXIC;OD=∅ 10.3±0.20mm COLOR:UL813 BLACK.
 - MARKING:RG213/U COAXIAL CABLE RoHS
 - CONNECTOR:UHF (PL-259) Male nickel plated
 - OPEN/SHORT MISS WIRE TEST 100%
 - CONDUCTOR RESISTANCE $\leq 5.64\Omega/\text{km}$
 - INSULATION RESISTANCE $\geq 2M\Omega$ DC300V 0.01Sec
- ALL MATERIALS SHOULD ACCORD WITH RoHS STANDARD.

PIN OUT:

CENTER _____ CENTER

SHELL _____ SHELL



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		EAR NO.		APPROVALS		DATE		DESCRIPTION	
DECIMALS	±.XX	ANGLES	±.X°	DRAWN	LF	3/DEC/2013		Amphenol Cables on Demand 20 VALLEY ST, ENDICOTT, NY 13760	
XXX	±.XXX	THIRD ANGLE PROJECTION		CHECKED	BA	3/DEC/2013		RG213/U TYPE N M/TTYPE N M	
				RESP ENG				SIZE DWG. NO.	REV.
				W/ENG				A	CO-213UHFMXX20-XXX
								SCALE	SHEET OF

NOTES: UNLESS OTHERWISE SPECIFIED

4 3 2 1