

HDSP-A22G, HDSP-A27G

13.7-mm (0.54-in) Dual-Digit Alphanumeric Display



Description

The Broadcom[®] 13.7-mm (0.54-in.) dual-digit GaP green displays are available in common anode and common cathode.

Devices

GaP Green	Description
HDSP-A22G	Common Anode
HDSP-A27G	Common Cathode

Features

- High reliability
- GaP green color
- Gray face paint
- Excellent appearance
 - Evenly lighted segments
 - Gray package gives optimum contrast
 - $\pm 50^\circ$ viewing angle
- Categorized for luminous intensity. Green categorized for color
- Easy assembly

Applications

- Suitable for indoor use
- Not recommended for industrial application; that is, operating temperature requirements exceeding 85°C or below -25°C (see note)
- Extreme temperature cycling not recommended

NOTE: For additional details, please contact your local Broadcom sales office or an authorized distributor.

Figure 1: Package Dimensions



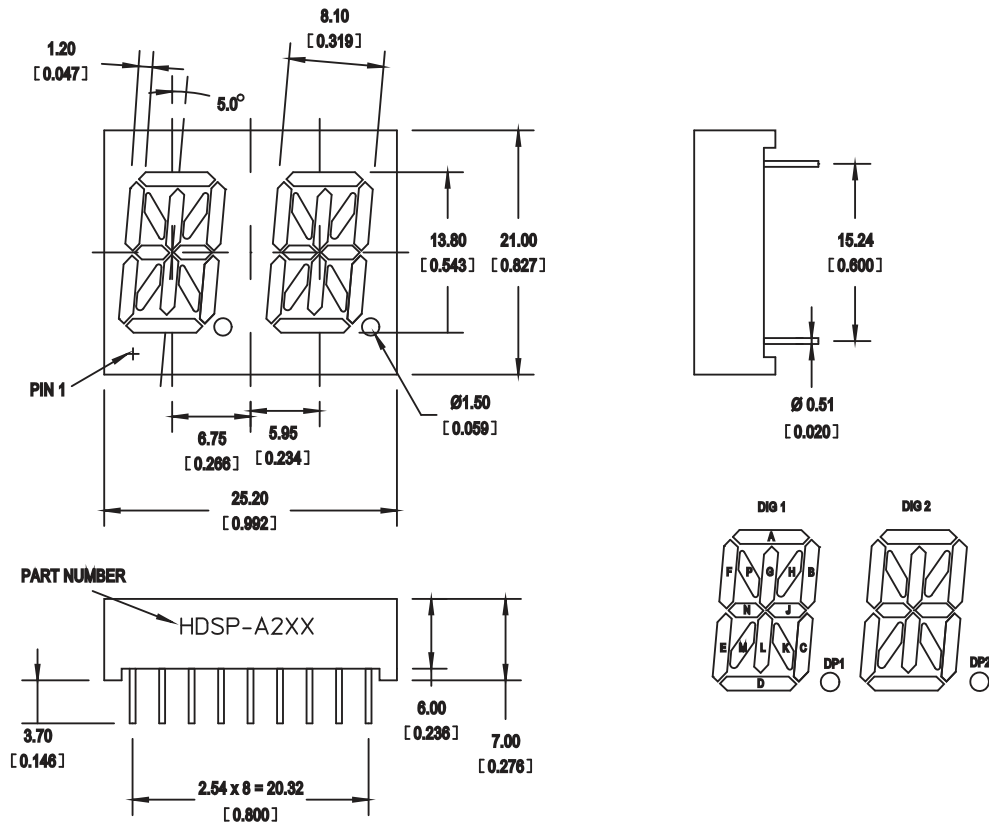


Figure 2: Internal Circuit Diagram

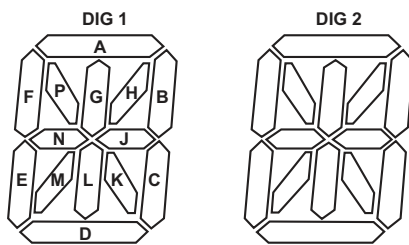


Internal Circuit Diagram (Common Anode)

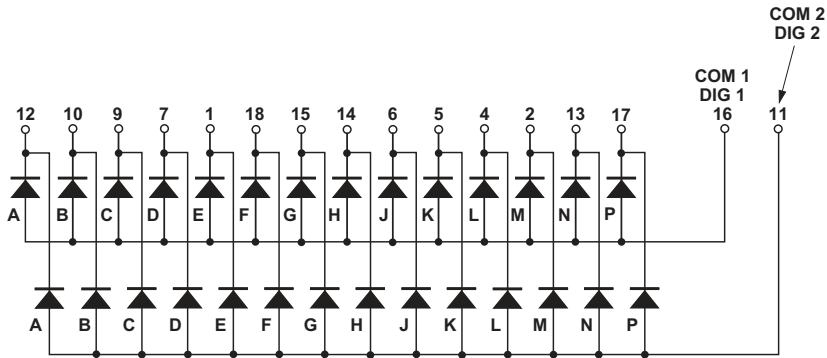

NOTE:
PINS 3, 8 NO CONNECTION

Internal Circuit Diagram (Common Cathode)

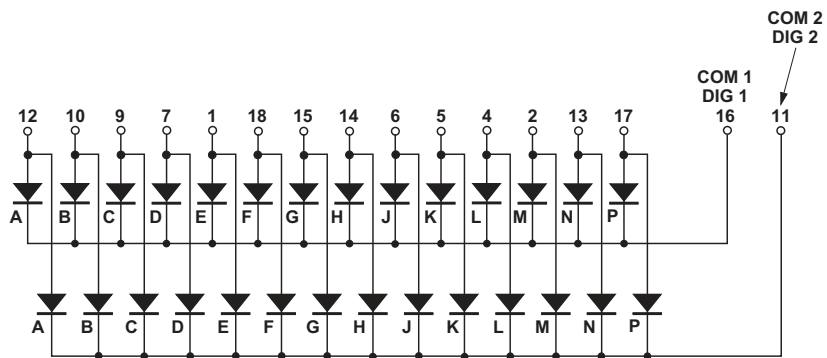

NOTE:
PINS 3, 8 NO CONNECTION

Pin Connection

Pin	Function
1	1E/2E
2	1M/2M
3	No Connection
4	1L/2L
5	1K/2K
6	1J/2J
7	1D/2D
8	No Connection
9	1C/2C

Pin	Function
10	1B/2B
11	Digit No. 2 Common Anode/Common Cathode
12	1A/2A
13	1N/2N
14	1H/2H
15	1G/2G
16	Digit No. 1 Common Anode/Common Cathode
17	1P/2P
18	1F/2F

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	GaP Green	Units
Power Dissipation Segment	52	mW
Forward Current Segment ^a	20	mA
Peak Forward Current Per Segment (1/10 Duty Factor at 10 kHz)	100	mA
Operating Temperature Range	-35 to +85	°C
Storage Temperature Range	-35 to +85	°C
Reverse Voltage per Segment or DP ^b	5	V
Wavesoldering Temperature for 3 Seconds (at 2-mm Distance from the Body)	250	°C

a. Derate above 25°C at 0.33 mA/°C.

b. Indicates product final test condition. Long term reverse bias is not recommended.

Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Devices HDSP-	Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
A22G/A27G	Luminous Intensity/Segment	I_V	3.20	5.05	—	mcd	$I_F = 10\text{ mA}$
	Forward Voltage	V_F	1.80	2.25	2.60	V	$I_F = 20\text{ mA}$
	Peak Wavelength	λ_{PEAK}	—	568	—	nm	
	Dominant Wavelength	λ_d	—	573	—	nm	
	Reverse Voltage	V_R	—	5	—	V	$I_R = 100\ \mu\text{A}$

Intensity Bin Limits (mcd at 10 mA)

Bin Name	Green	
	Min. ^{a, b}	Max. ^{a, b}
L	3.201	5.050
M	5.051	8.000

a. Bin categories are established for classification of products. Products may not be available in all bin categories.

b. Tolerance for each bin limit is $\pm 10\%$.

Color Bin Limits (nm at 10 mA)

Color	Dominant Wavelength (nm)		
	Bin	Min. ^{a, b}	Max. ^{a, b}
Green	2	573.5	576.5
	3	570.5	573.5

a. Bin categories are established for classification of products. Products may not be available in all bin categories.

b. Tolerance for each bin limit is $\pm 1\text{ nm}$.

Figure 3: Maximum Allowable Average or DC Current vs. Ambient Temperature

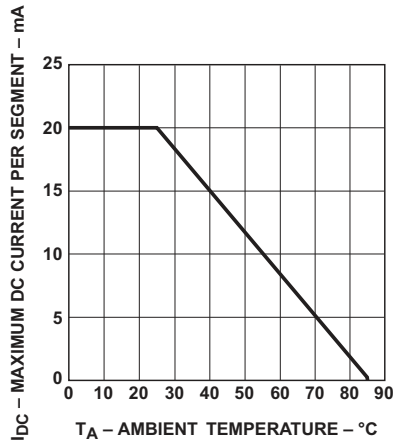


Figure 4: Forward Current vs. Forward Voltage


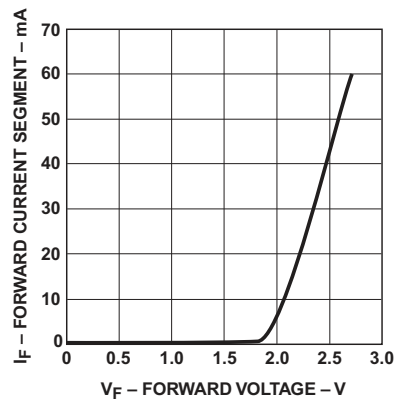


Figure 5: Relative Luminous Intensity vs. DC Forward Current

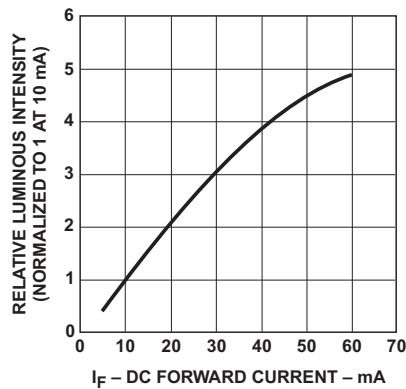

Soldering and Cleaning

Cleaning agents from ketone family (acetone, methyl ethyl ketone, and so on) and from the chlorinated hydrocarbon family (methylene chloride, trichloro ethylene, carbon tetrachloride, and so on) are not recommended for cleaning LED parts. All of these various solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.

Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries, and/or the EU.

Copyright © 2004–2019 Broadcom. All Rights Reserved.

The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, please visit www.broadcom.com.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.