


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A2	REV PER ECN-22-150900	28APR2022	RK CSD

AMP
WIRE RANGE

26-22 AWG
STRANDED

- 1 WIRE INSULATION DIA .050 TO .082.
- 2 FINISH: BODY AND SLEEVE:
TIN PLATE PER ASTM B545.
- 3 MATERIAL: BODY AND SLEEVE,
COPPER PER ASTM B152
INSULATION: PVF²
COLOR- NATURAL

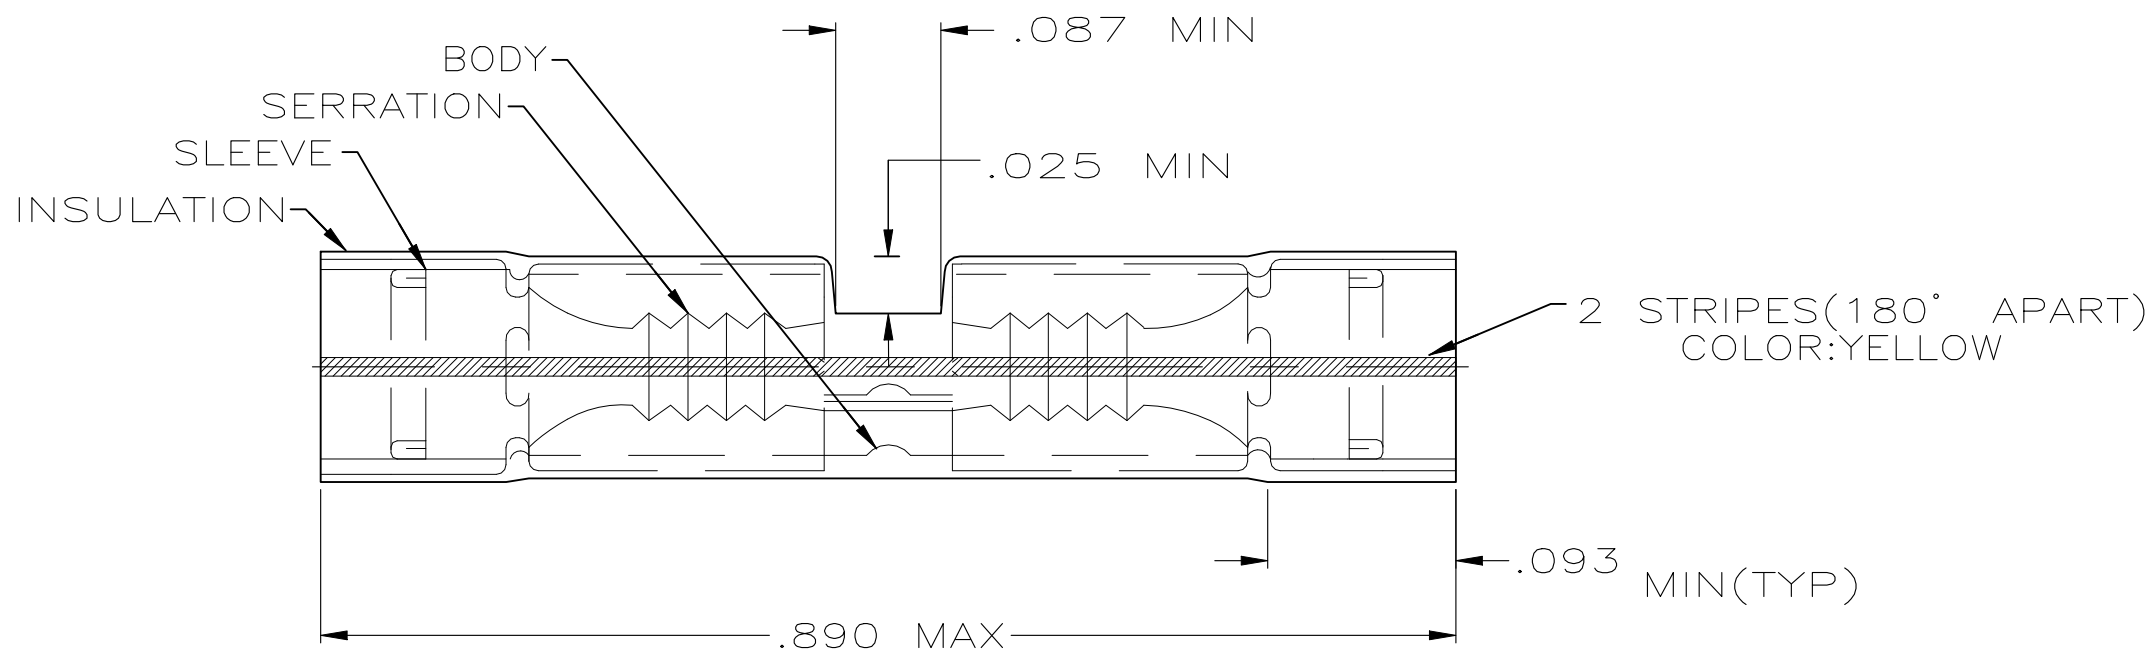

1000	LOOSE PIECE	696425-1
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION
TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY
1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE:
150°C

VOLTAGE RATING:
-

CIRCULAR MIL AREA:
0.10-0.41mm²[202-810]
STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± .008
3 PLC	± -
4 PLC ANGLES	± -

MATERIAL: - 3

FINISH: - 2

DWN jr_ruth 19AUG05
CHK T MICHELUTTI 19AUG05
APVD T MICHELUTTI 19AUG05
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

STE TE Connectivity

NAME: SPLICE, BUTT, PVF², P.I.D.G.
WIRE SIZE: 26-22 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-696425	-

CUSTOMER DRAWING SCALE 1:1 SHEET 1 OF 1 REV A2