

SAW Filter 1237.0MHz
Part No: MP01698

Model: TA0836A
Rev No: 1

A. MAXIMUM RATING:


1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -50°C to +60°C
4. Storage Temperature: -50°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1237	-	-
Min. Insertion loss IL	dB	-	2.4	3	-
Bandwidth @ -1dB	MHz	-	46	-	-
Bandwidth @ -1.5dB	MHz	40	51	-	-
Attenuation (Reference level from 0dB)					
Fc -60MHz	dB	30	60	-	-
Fc -50MHz	dB	20	50	-	-
Fc +50MHz	dB	20	30	-	-
Fc +60MHz	dB	30	38	-	-
Temperature Coefficient of Frequency	ppm/°C	-	-36	-	-

C. MEASUREMENT CIRCUIT:


HP Network analyzer

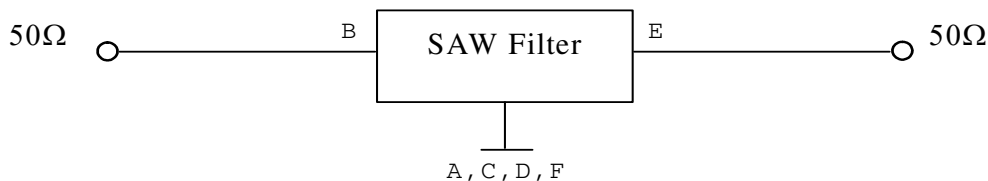

SAW Filter 1237.0MHz
Part No: MP01698


Model: TA0836A
Rev No: 1

D. OUTLINE DRAWING:

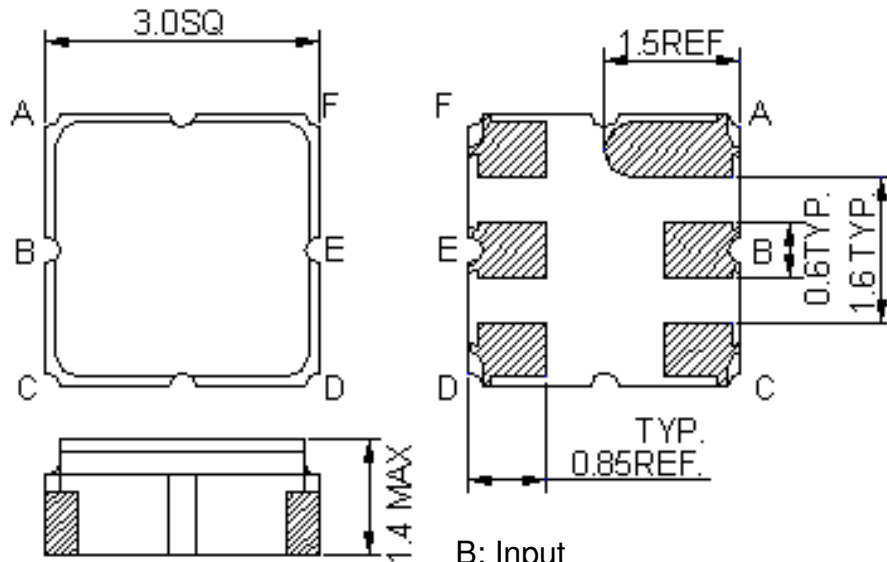

B: Input
E: Output
A, C, D, F: Ground
Unit: mm



E. PCB FOOTPRINT:

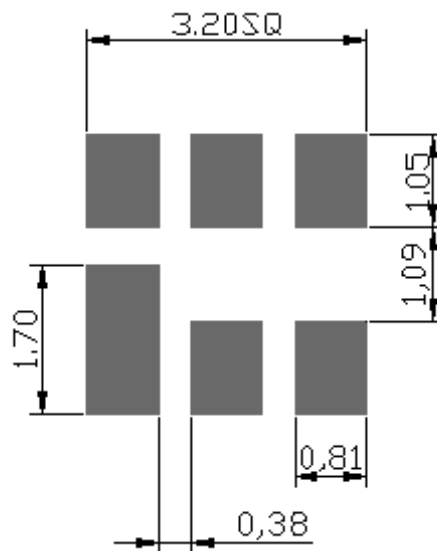

SAW Filter 1237.0MHz
Part No: MP01698

Model: TA0836A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

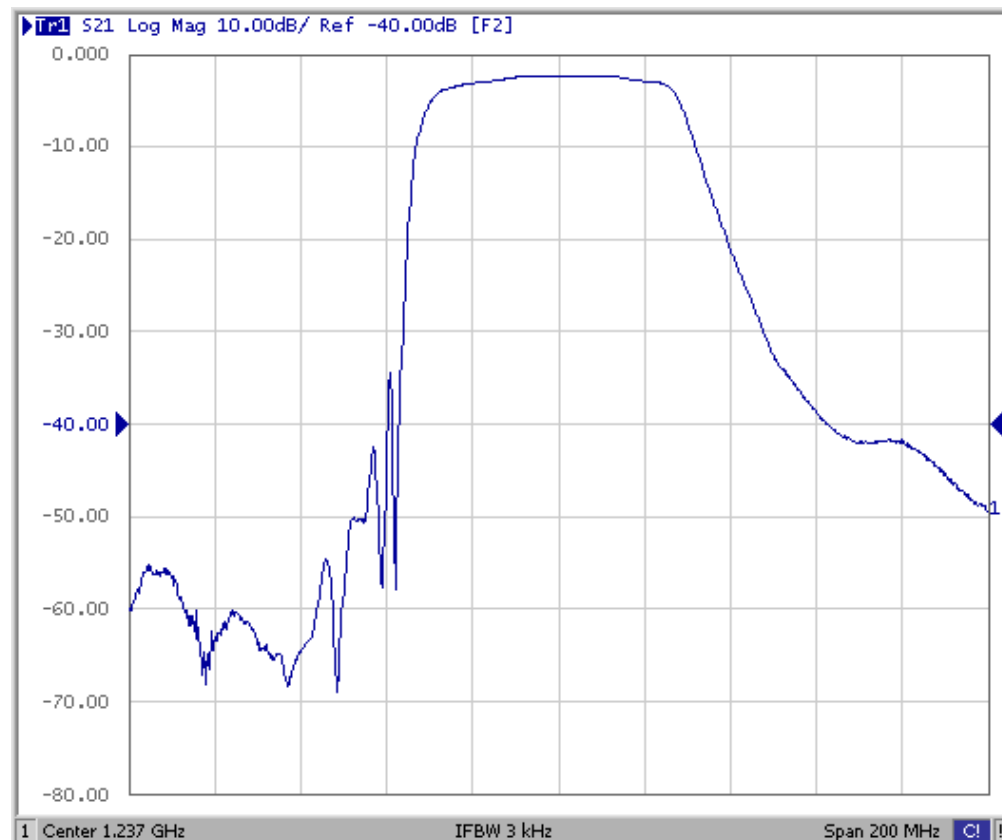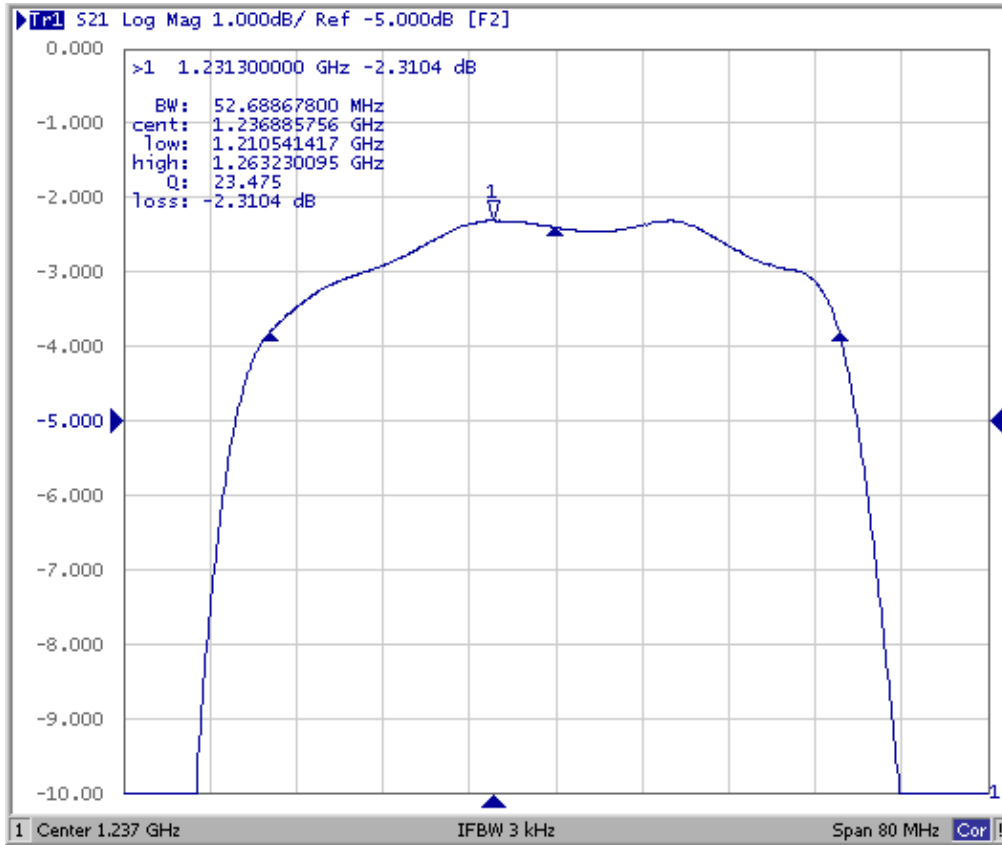


SAW Filter 1237.0MHz
Part No: MP01698


Model: TA0836A
Rev No: 1

G. PACKING:

1. Reel Dimension (Reel Count: 7" = 1000; 13" = 3000)

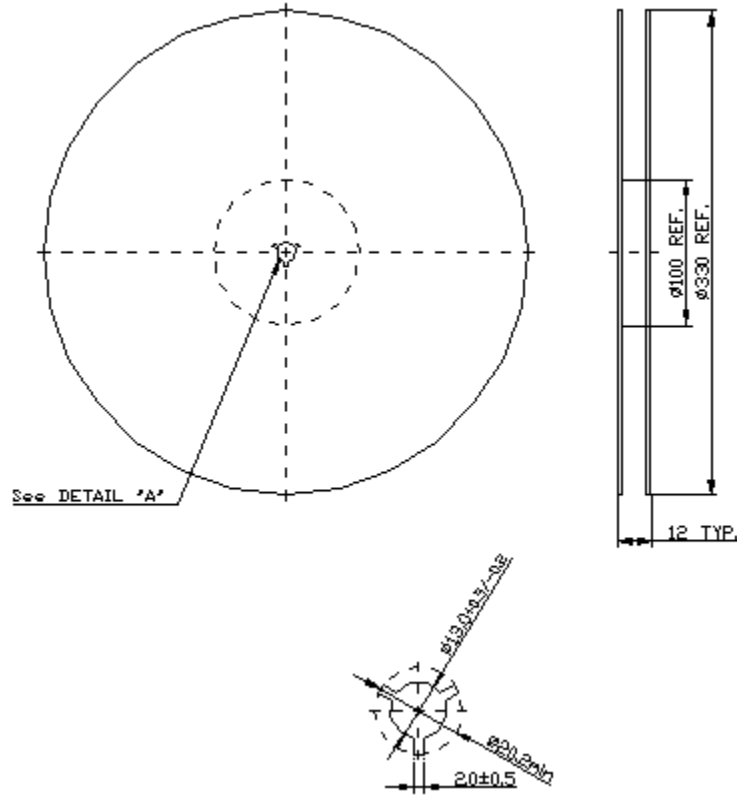

2. Tape Dimension

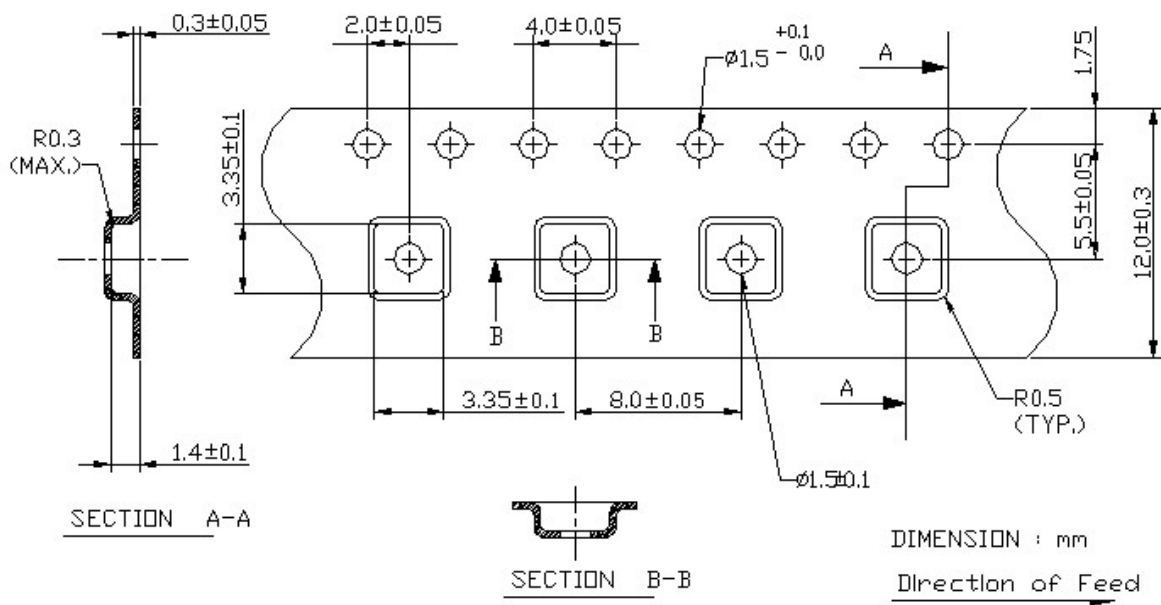

SAW Filter 1237.0MHz
Part No: MP01698

Model: TA0836A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

