
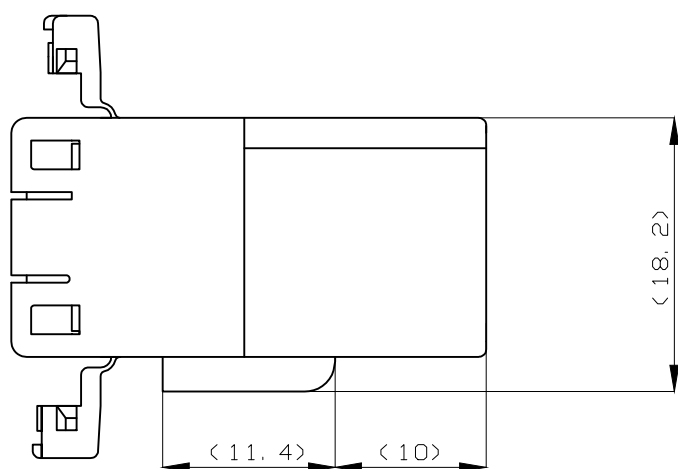
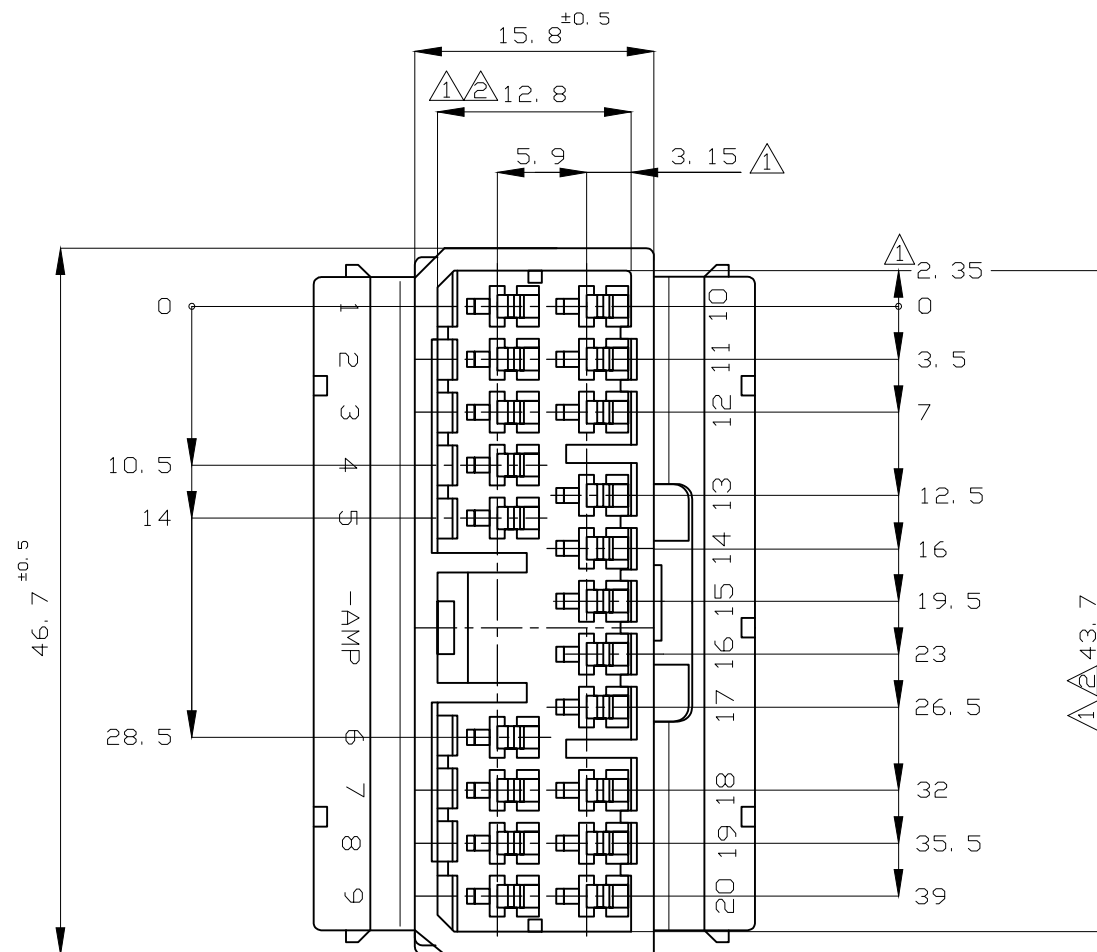


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C2	OBSOLETED -2	12NOV2020	PSJ	TM

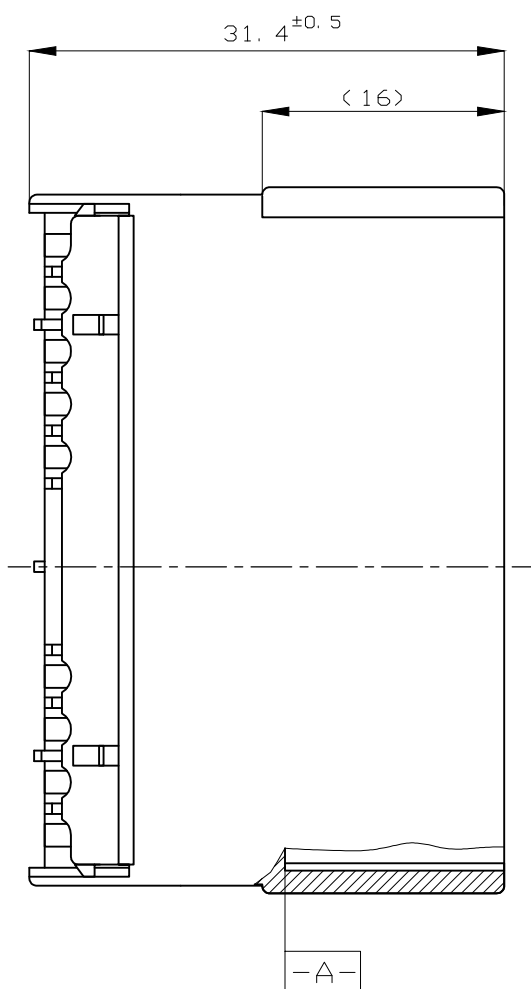

- ① -A- 面より2mmの範囲で測定。
 - ② 相手ハウジングと所定の機能を満足して嵌合できること。
 - 3. 内装するタブコンタクト型番：173633, 173645
 - 4. 嵌合相手ハウジング型番：174952
- ① MUST BE KEPT BETWEEN -A- AND 2.
 - ② TO BE MATED WITH THE PLUG HOUSING SMOOTHLY.
 - 3. APPLIED TAB CONTACT PART NUMBER: 173633, 173645.
 - 4. APPLIED PLUG HOUSING PART NUMBER: 174952, etc.

		FLAMMABILITY OF MATERIAL 使用材料難燃グレード	COLOR 色	PART NUMBER 型番
	V-2		WHITE 白	1-174936-1
OBSOLETE	HB		YELLOW 黄	174936-7
	HB		GRAY 灰	174936-6
	HB		BLUE 青	174936-5
OBSOLETE	HB		BLACK 黒	174936-2
	HB		WHITE 白	174936-1

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0 < x ≤ 10	: ±0.2
10 < x ≤ 30	: ±0.25
30 < x ≤ 100	: ±0.3
ANGLE ; 角度	: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.NAGAMINE	10/17'90	STE TE Connectivity	
DIMENSIONS: mm		CHK M.OHSHIMA	10/18'90		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		APVD M.NOGUCHI	10/18'90		
MATERIAL PBT		PRODUCT SPEC 108-5264	APPLICATION SPEC -		
		NAME 070 SERIES MULTI-LOCK CONNECTOR 20 POSITION CAP HOUSING (W-W)		SIZE A3	CAGE CODE 00779
		DRAWING NO C-174936		RESTRICTED TO -	
		WEIGHT 0.000000		SCALE 2:1	SHEET 1 OF 1
		CUSTOMER DRAWING		REV C2	