



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P24F07M-XXYZ	SEE SHEET 2

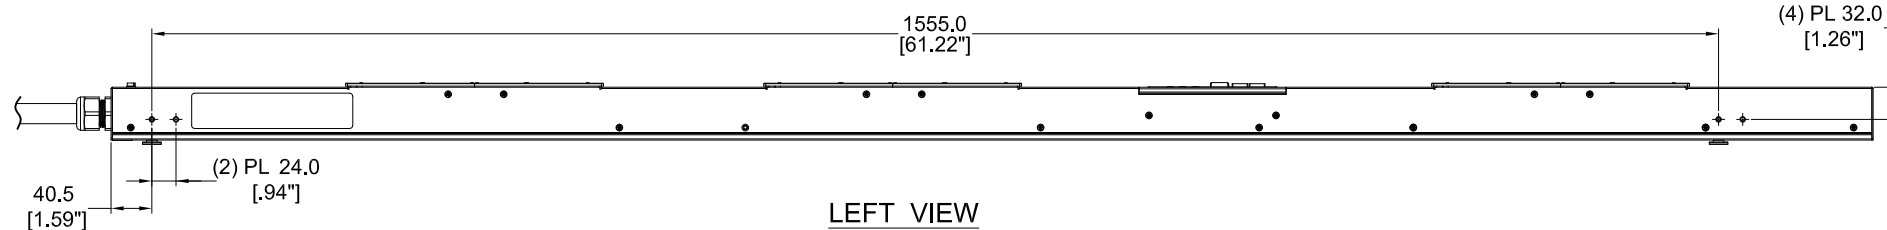


LEFT VIEW

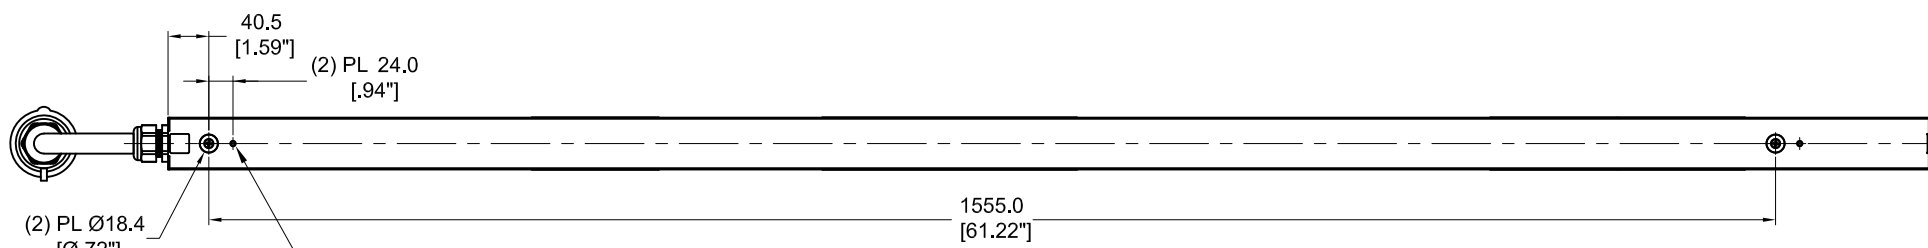

REAR VIEW

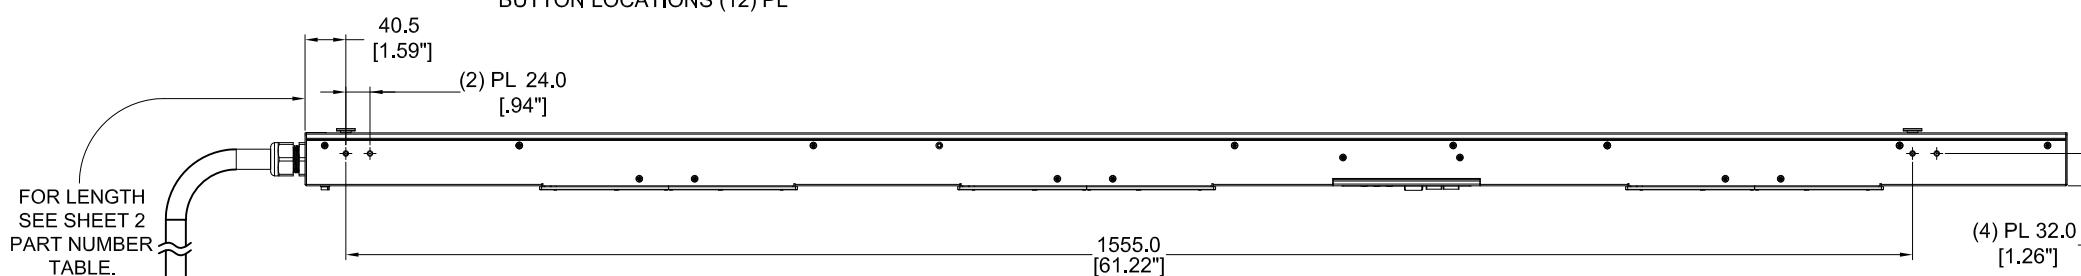

RIGHT VIEW

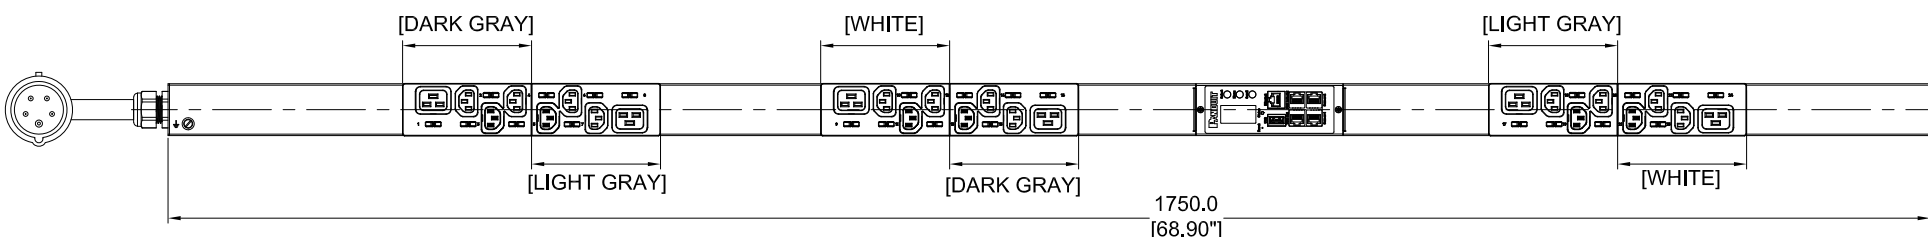

FRONT VIEW

**SPECIFICATION:**


- STANDARD:
  - UNIT TYPE: MONITORED OUTLET
  - ORIENTATION: VERTICAL, 0U FULL
  - OUTLET QTY & TYPE: (18)C13, (6) C19
  - INPUT VOLTAGE: 200-240/346-415VAC
  - INPUT CURRENT: 16A
  - BREAKER QTY & TYPE: N/A
  - INPUT PHASE: THREE-PHASE, WYE
  - RATED POWER: 11.0kVA
  - INPUT PLUG: IEC 60309 3P+N+E 6H 16A
  - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
  - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

**NOTES:**

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [ INCHES ].
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

**IDENTIFICATION**

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24F07M-XX Y Z



BOTTOM VIEW

XX: FINISHED GOOD COLOR BL =BLACK RD =RED WH =WHITE YL =YELLOW BU =BLUE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
---	---	--

**PLUG/RECEPTACLE BLOCK**

**PLUG**  
IEC 60309, 4P 5W, 6H  
IP44 (SPLASHPROOF)  
16A, 346 - 415V MAX RATED INPUT

**RECEPTACLES**  
IEC 60320/C19  
16A, 250V MAX RATED OUTPUT

**RECEPTACLES**  
IEC 60320/C13  
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P24F07M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P24F07M
01A	10/12/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24F07M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN \_\_\_\_\_  
DATE \_\_\_\_\_  
PRINT \_\_\_\_\_

TITLE: INTELLIGENT SERIES PDU  
P24F07M-XXYZ  
CUSTOMER DRAWING

ITEM REVISION NAME: \_\_\_\_\_  
DATASHEET FILE NAME: \_\_\_\_\_

UNLESS OTHERWISE SPECIFIED  
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P24F07M\_DC

DRAWN BY: WSJ DATE: 10/12/2017 CHK: SEAN SCALE: NONE

SHT 1 OF 2 SCALE: B



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24F07M	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-BL1A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-BL1B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-RD1A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-RD1B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-RD1C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-WH1A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-WH1B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-WH1C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-YL1A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-YL1B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-YL1C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-BU1A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-BU1B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-BU1C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-GN1A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-GN1B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-GN1C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-BL2A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-BL2B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-BL2C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-RD2A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-RD2B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-RD2C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-WH2A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-WH2B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-WH2C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-YL2A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-YL2B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-YL2C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-BU2A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-BU2B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-BU2C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg
P24F07M-GN2A	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'+7"/-3.5"	7.4kg
P24F07M-GN2B	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'+7"/-3.5"	7.6kg
P24F07M-GN2C	VERTICAL,(18) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'+10"/-5"	7.8kg

B

B



A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN DATE PRINT
TITLE <p style="text-align: center;">INTELLIGENT SERIES PDU P24F07M-XXYZ CUSTOMER DRAWING</p>		
ITEM REVISION NAME DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		
DRAWN BY DATE WSJ 10/12/2017		CHK SCALE SEAN NONE
MATERIAL/COLOR: <p style="text-align: center;">N/A</p>		DRAWING NUMBER: <p style="text-align: center;">P24F07M_DC</p>
REV DATE BY CHK APR DESCRIPTION ECN		SHT 2 OF 2 SCALE B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P24F07M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P24F07M
01A	10/12/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24F07M

