


COIL: @ 25°C	
RESISTANCE	280 OHMS ±10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	8.4 VDC
MUST RELEASE	5.0 VDC MAX., 0.8 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE 4 MS MAX.
	RELEASE 6 MS MAX.
	CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

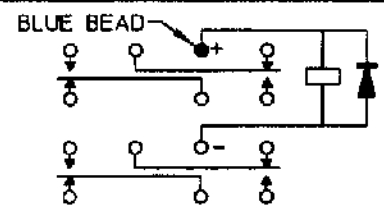

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. PBB 1/18/01 CK. 1/29/01 MB



CUST. QPL
CUST. NO. M39016/53-021M REV.

3SBH RELAY

3SBH1285A2