

## **Photodiode Socket**



## **FEATURES**

- · Ceramic Socket for Devices to Eliminate Soldering to Leads
- For Use with AXUV20A, AXUV20HS1, SXUV20HS1 and UVG20S Photodiodes with 7.4 mm Lead Spacing
- Low Outgassing Materials for Vacuum Compatibility

## **Package Information**

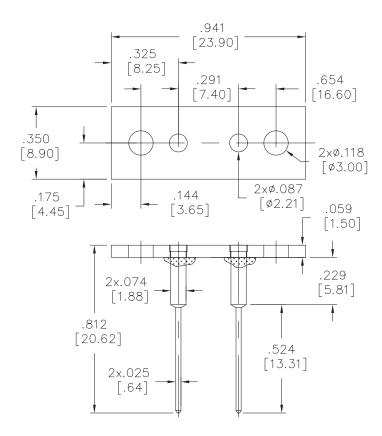

Dimensions are in inch [metric] units.

Specifications are subject to change without prior notice.

1260 Calle Suerte, Camarillo, California 93012
Phone: +1 805.499.0335 | Fax: +1 805.499.8108 | sales@optodiode.com | www.optodiode.com