



**ALPHA & OMEGA**  
SEMICONDUCTOR

**AOT360A70L/AOTF360A70L/AOB360A70L**  
**700V,  $\alpha$  MOS5™ N-Channel Power Transistor**

### General Description

- Proprietary  $\alpha$ MOS5™ technology
- Low  $R_{DS(ON)}$
- Optimized switching parameters for better EMI performance
- Enhanced body diode for robustness and fast reverse recovery


### Applications

- Flyback for SMPS
- Charger ,PD Adapter, TV, lighting.


### Product Summary

$V_{DS} @ T_{j,max}$	800V
$I_{DM}$	48A
$R_{DS(ON),max}$	< 0.36Ω
$Q_{g,typ}$	22.5nC
$E_{oss} @ 400V$	2.8μJ


100% UIS Tested  
100%  $R_g$  Tested




AOT360A70L



AOTF360A70L



AOB360A70L



Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOB360A70L	TO263	Tape&Reel	800
AOT360A70L	TO220 Green	Tube	1000
AOTF360A70L	TO220F Green	Tube	1000

### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	AOT(B)360A70L	AOTF360A70L	Units
Drain-Source Voltage	$V_{DS}$	700		V
Gate-Source Voltage	$V_{GS}$		$\pm 20$	V
Continuous Drain Current <small><math>T_C=25^\circ\text{C}</math></small>	$I_D$	12	12*	A
		7.6	7.6*	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	48		
Avalanche Current <sup>C</sup> $L=1\text{mH}$	$I_{AR}$	3.4		A
Repetitive avalanche energy <sup>C</sup>	$E_{AR}$	5.8		mJ
Single pulsed avalanche energy <sup>G</sup>	$E_{AS}$	50		mJ
MOSFET dv/dt ruggedness	dv/dt	100		V/ns
Peak diode recovery dv/dt		20		
Power Dissipation <sup>B</sup> <small><math>T_C=25^\circ\text{C}</math></small>	$P_D$	156	29.5	W
		1.25	0.23	W/°C
Junction and Storage Temperature Range	$T_J, T_{STG}$		-55 to 150	°C
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds	$T_L$		300	°C

### Thermal Characteristics

Parameter	Symbol	AOT(B)360A70L	AOTF360A70L	Units
Maximum Junction-to-Ambient <sup>A,D</sup>	$R_{thJA}$	65	65	°C/W
Maximum Case-to-sink <sup>A</sup>	$R_{thCS}$	0.5	---	°C/W
Maximum Junction-to-Case	$R_{thJC}$	0.8	4.2	°C/W

\* Drain current limited by maximum junction temperature.

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	I <sub>D</sub> =250μA, V <sub>GS</sub> =0V, T <sub>J</sub> =25°C	700			V
		I <sub>D</sub> =250μA, V <sub>GS</sub> =0V, T <sub>J</sub> =150°C		800		
BV <sub>DSS</sub> /ΔT <sub>J</sub>	Breakdown Voltage Temperature Coefficient	I <sub>D</sub> =250μA, V <sub>GS</sub> =0V		0.6		V/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =700V, V <sub>GS</sub> =0V		1		μA
		V <sub>DS</sub> =560V, T <sub>J</sub> =125°C		10		
I <sub>GSS</sub>	Gate-Body leakage current	V <sub>DS</sub> =0V, V <sub>GS</sub> =±20V			±100	nA
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =5V, I <sub>D</sub> =250μA		4		V
R <sub>DS(ON)</sub>	Static Drain-Source On-Resistance	V <sub>GS</sub> =10V, I <sub>D</sub> =6A		0.316	0.36	Ω
g <sub>FS</sub>	Forward Transconductance	V <sub>DS</sub> =10V, I <sub>D</sub> =6A		10		S
V <sub>SD</sub>	Diode Forward Voltage	I <sub>S</sub> =6A, V <sub>GS</sub> =0V		0.86	1.2	V
I <sub>S</sub>	Maximum Body-Diode Continuous Current				12	A
I <sub>SM</sub>	Maximum Body-Diode Pulsed Current <sup>c</sup>				48	A
<b>DYNAMIC PARAMETERS</b>						
C <sub>iss</sub>	Input Capacitance	V <sub>GS</sub> =0V, V <sub>DS</sub> =100V, f=1MHz		1360		pF
C <sub>oss</sub>	Output Capacitance			34		pF
C <sub>o(er)</sub>	Effective output capacitance, energy related <sup>H</sup>	V <sub>GS</sub> =0V, V <sub>DS</sub> =0 to 480V, f=1MHz		32		pF
C <sub>o(tr)</sub>	Effective output capacitance, time related <sup>I</sup>			147		pF
C <sub>rss</sub>	Reverse Transfer Capacitance	V <sub>GS</sub> =0V, V <sub>DS</sub> =100V, f=1MHz		1.7		pF
R <sub>g</sub>	Gate resistance	f=1MHz		2		Ω
<b>SWITCHING PARAMETERS</b>						
Q <sub>g</sub>	Total Gate Charge	V <sub>GS</sub> =10V, V <sub>DS</sub> =480V, I <sub>D</sub> =6A		22.5		nC
Q <sub>gs</sub>	Gate Source Charge			9		nC
Q <sub>gd</sub>	Gate Drain Charge			6.3		nC
T <sub>d(on)</sub>	Turn-On DelayTime	V <sub>GS</sub> =10V, V <sub>DS</sub> =400V, I <sub>D</sub> =6A, R <sub>G</sub> =5Ω		24.5		ns
T <sub>r</sub>	Turn-On Rise Time			17		ns
T <sub>d(off)</sub>	Turn-Off DelayTime			34.5		ns
T <sub>f</sub>	Turn-Off Fall Time			13		ns
T <sub>rr</sub>	Body Diode Reverse Recovery Time	I <sub>F</sub> =6A, dI/dt=100A/μs, V <sub>DS</sub> =400V		310		ns
I <sub>rm</sub>	Peak Reverse Recovery Current			24.5		A
Q <sub>rr</sub>	Body Diode Reverse Recovery Charge			4.8		μC

A. The value of R<sub>qJA</sub> is measured with the device in a still air environment with T<sub>A</sub>=25°C.

B. The power dissipation P<sub>D</sub> is based on T<sub>J(MAX)</sub>=150°C in a TO252 package, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature T<sub>J(MAX)</sub>=150°C.

D. The R<sub>qJA</sub> is the sum of the thermal impedance from junction to case R<sub>qJC</sub> and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.

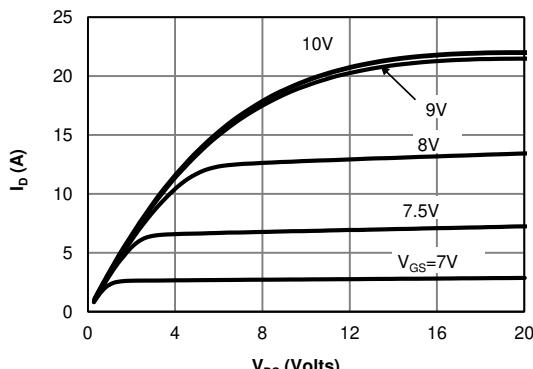
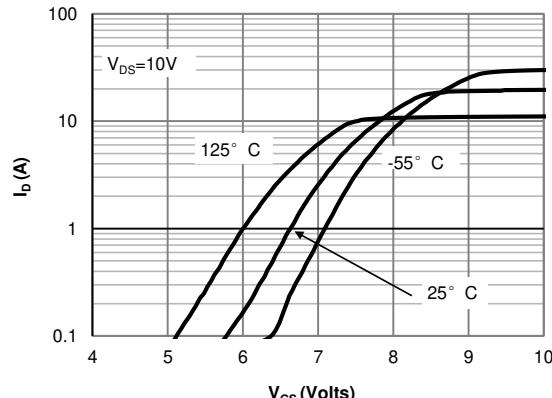
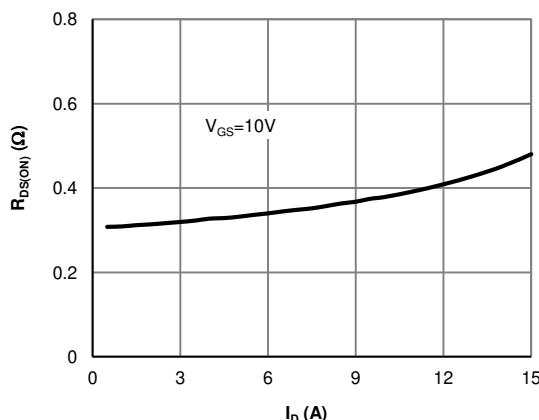
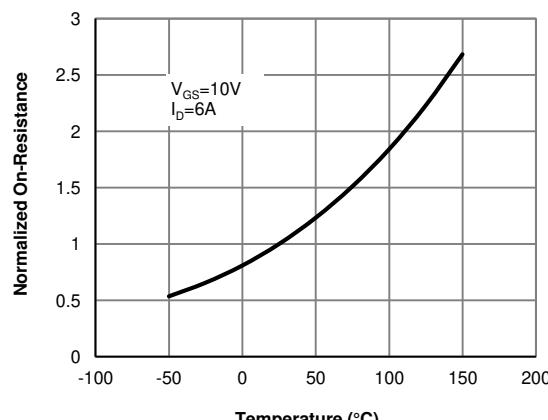
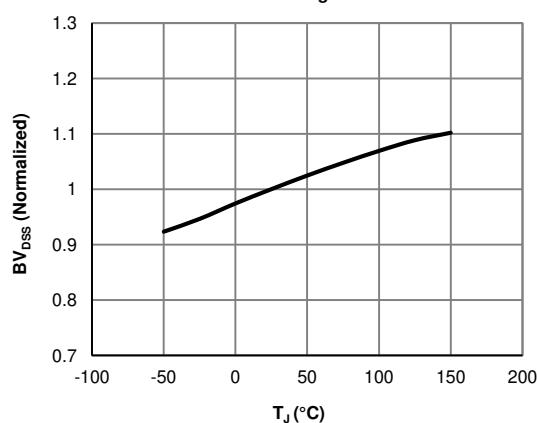
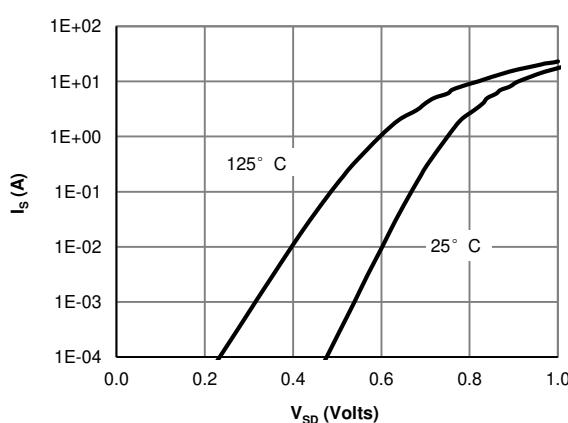
F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of T<sub>J(MAX)</sub>=150°C. The SOA curve provides a single pulse rating.







G. L=60mH, I<sub>AS</sub>=1.3A, R<sub>G</sub>=25Ω, Starting T<sub>J</sub>=25°C.

H. C<sub>o(er)</sub> is a fixed capacitance that gives the same stored energy as C<sub>oss</sub> while V<sub>DS</sub> is rising from 0 to 80% V<sub>(BR)DSS</sub>.

I. C<sub>o(tr)</sub> is a fixed capacitance that gives the same charging time as C<sub>oss</sub> while V<sub>DS</sub> is rising from 0 to 80% V<sub>(BR)DSS</sub>.

APPLICATIONS OR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

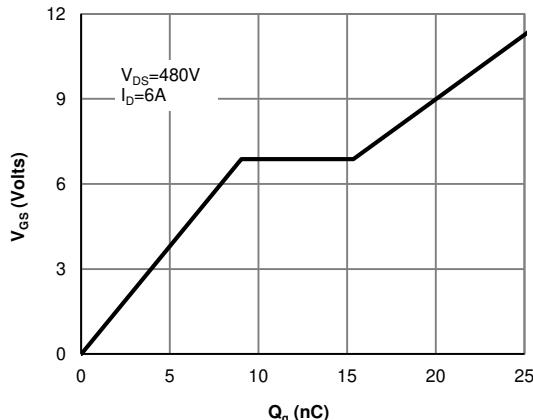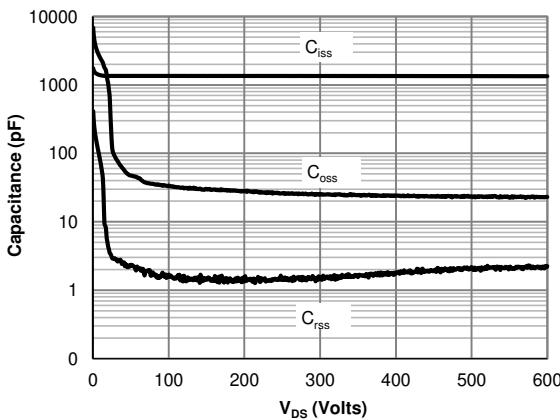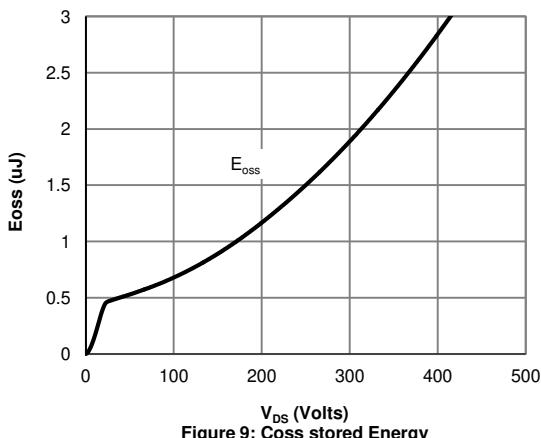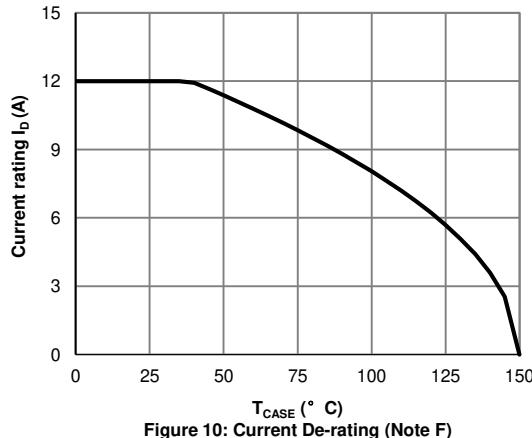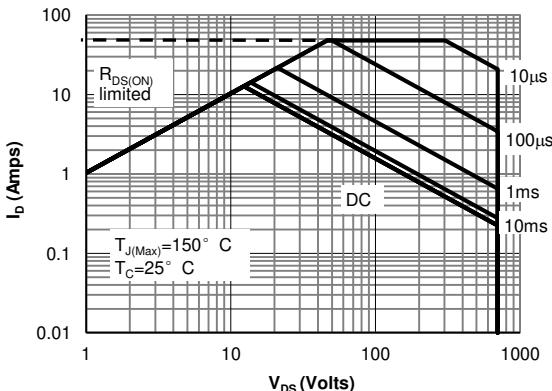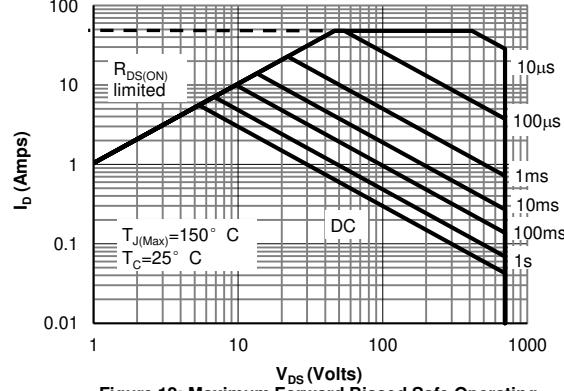**Figure 1: On-Region Characteristics**

**Figure 2: Transfer Characteristics**

**Figure 3: On-Resistance vs. Drain Current and Gate Voltage**

**Figure 4: On-Resistance vs. Junction Temperature**

**Figure 5: Break Down vs. Junction Temperature**

**Figure 6: Body-Diode Characteristics**

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 7: Gate-Charge Characteristics**

**Figure 8: Capacitance Characteristics**

**Figure 9: Coss stored Energy**

**Figure 10: Current De-rating (Note F)**

**Figure 11: Maximum Forward Biased Safe Operating Area for AOT(B)360A70L (Note F)**

**Figure 12: Maximum Forward Biased Safe Operating Area for AOTF360A70L (Note F)**

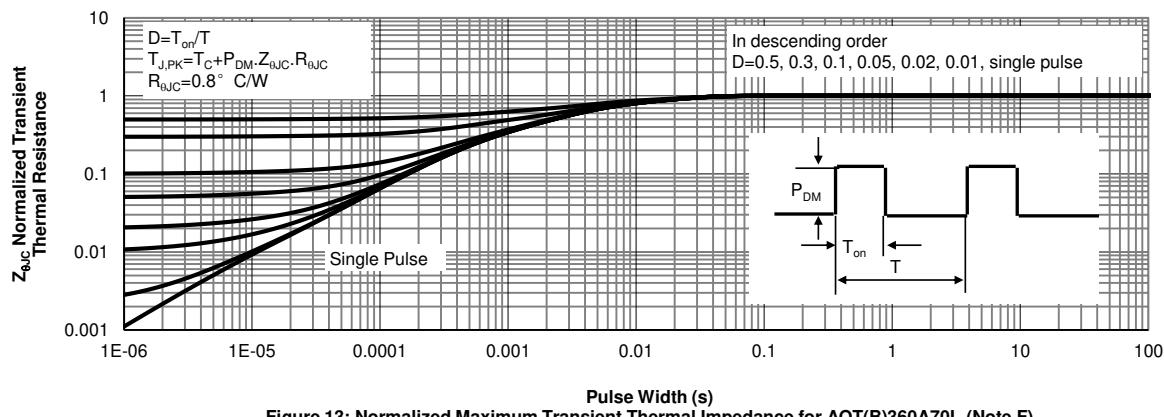
**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**


Figure 13: Normalized Maximum Transient Thermal Impedance for AOT(B)360A70L (Note F)

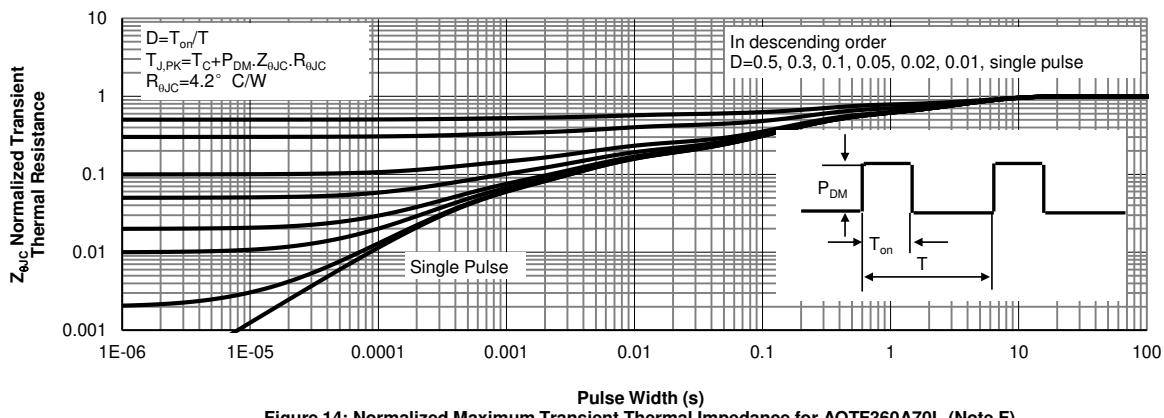
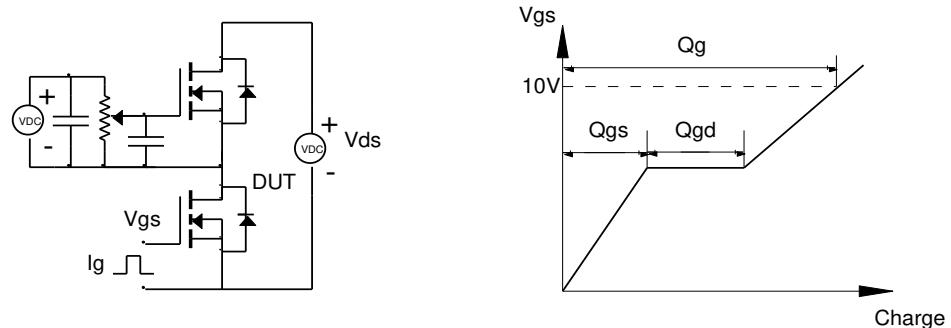
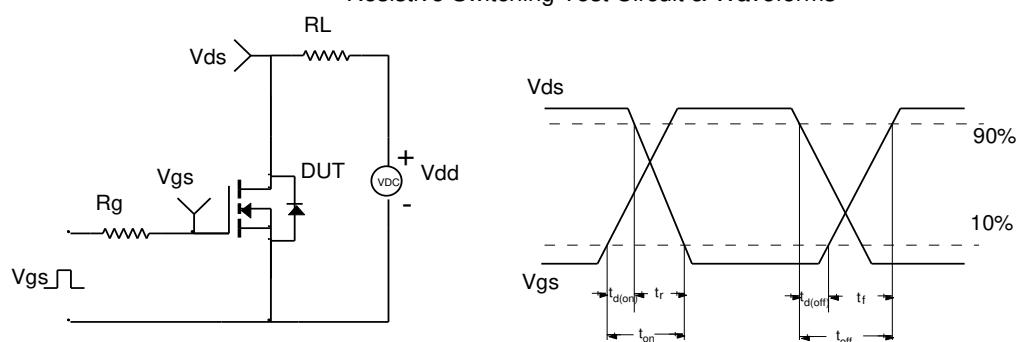
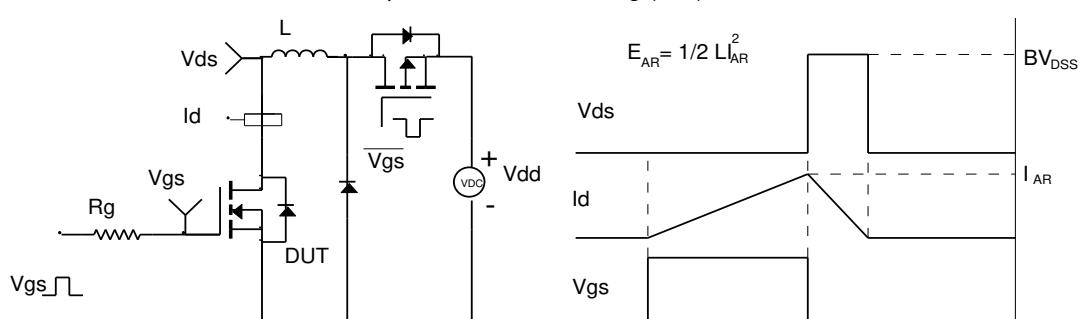


Figure 14: Normalized Maximum Transient Thermal Impedance for AOTF360A70L (Note F)

**Gate Charge Test Circuit & Waveform**

**Resistive Switching Test Circuit & Waveforms**

**Unclamped Inductive Switching (UIS) Test Circuit & Waveforms**

**Diode Recovery Test Circuit & Waveforms**
