

SUMMARY

Wires



Image is for illustrative purpose only

| | |
|------------------|----------------|
| Series | 2B |
| Termination type | |
| IP rating | 50 |
| AWG wire size | 0.00 - 0.00 |
| Cable Ø | 5.30 - 6.20 mm |
| Status | active |

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | FG*: B series cable collet |
| Keying | No keying |
| Housing Material | Brass (nickel plated [SAE AMS QQ N 290]) collet |
| Weight | 4.35 g |

Performance

Configuration
Insulator
Rated Current


Others

Endurance (Shell): 5000
Temp (min / max): -55° C / +250° C
Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
12NC part number: 4022.438.33586

DRAWINGS

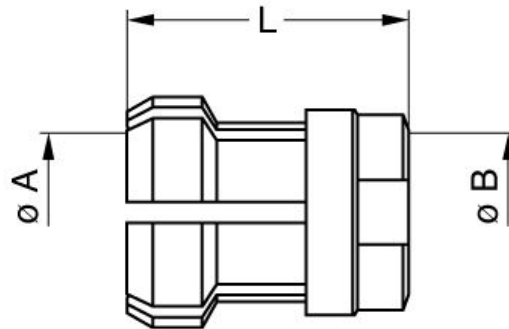

No keying

Dimensions

| | A | B | L |
|-----|------|------|------|
| mm. | 6.2 | 6.2 | 13.5 |
| in. | 0,24 | 0,24 | 0,53 |

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.