



## 3.6x10mm Axial-leaded, Fast-Acting, Single Cap Ceramic Tube Fuses C310FC Series

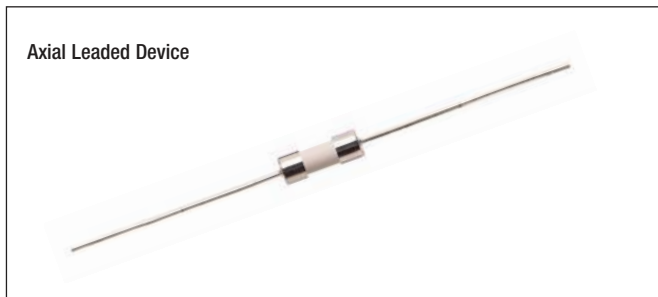

Axial Leaded Device

Dimensions - mm  
Drawing Not to Scale

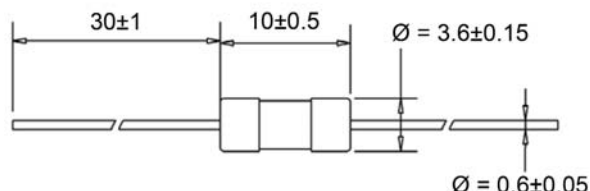

### Description

A fast-acting 3.6 x 10mm axial-leaded fuse constructed with ceramic tube and one-piece nickel-plated endcaps featuring tinned copper axial leads. Small 3.6 x 10mm size offers more design flexibility by doing away with conventional over-capping while providing higher I<sup>2</sup>t values.

Amp Rating	Electrical Characteristics						
	1.5I <sub>n</sub>	2.1I <sub>n</sub>	2.75I <sub>n</sub>		4I <sub>n</sub>		10I <sub>n</sub>
	Min	Max	Min	Max	Min	Max	Max
800mA~3.15A	1hour	30min	10ms	3sec	3ms	300ms	20ms

### Features

- Single cap, axial leaded, fast-acting fuse
- 3.6 x 10mm physical size
- Ceramic tube, nickel-plated brass endcap construction
- Tinned copper axial leads
- Designed to IEC60127-3, Sheet 3
- RoHS complaint, lead-free and halogen free
- cURus, TUV, CQC, KC Agency approvals

### Agency Information

- cURus Approval: File E19180 Guide JDYX2/YX8
- TUV Approval: File No: J 50217156
- CQC: CQC12012069004
- KC: SU05030-12001A

### Ordering

- Specify packaging, product and option code (e.g., C310FC-2-TR1)

### Environmental Specifications:

- Terminal Strength: MIL-STD-202G Method 211A. Test Condition A
- Thermal Shock: MIL-STD-202G, Method 107G (Test Condition 5cycles -40°C to 85°C)
- Resistance to Moisture: MIL-STD-202G, Method 106, Humidity (90~98%RH), Heat (65°C)
- Vibration: MIL-STD-202G, Method 201A (10~55Hz) Condition A
- Salt Spray: MIL-STD-202G, Method 101D, Test Condition B
- Solderability: J-STD-002C, Test Method C1

### Specifications

Catalog Number	Voltage Rating Vac	Interrupting Rating @ 250Vac (Amps)	Typical Cold Resistance (mΩ)*	Typical Melting I <sup>2</sup> t (A <sup>2</sup> s)**	Max. Voltage Drop (mV)***	Agency Information			
						cURus	TUV	CQC	KC
C310FC-800mA-R	250	35	70	0.56	180	X	X		
C310FC-1.6A-R	250	35	34.5	2.2	120	X	X	X	X
C310FC-2A-R	250	35	26	3.8	100	X	X	X	X
C310FC-3.15A-R	250	35	15	13.3	100	X	X	X	X


\* Typical Cold Resistance (Measured at ≤10% of rated current).

\*\* Typical Melting I<sup>2</sup>t (Tested at 10I<sub>n</sub>).

\*\*\* Maximum Voltage Drop (Voltage drop was measured at 25°C ambient temperature at rated current).

## Wave Soldering Parameters

Note: These devices are NOT recommended for IR or convection reflow processes.

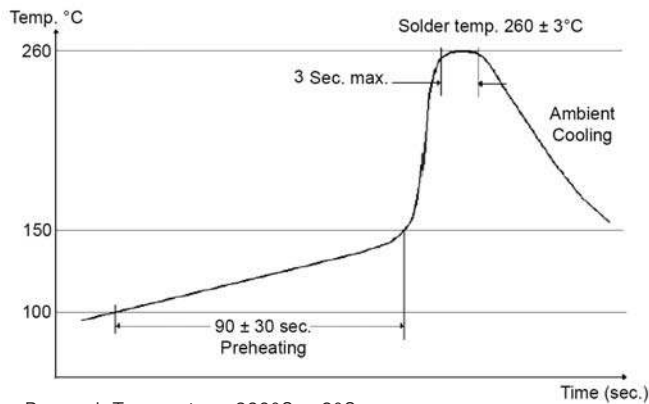


- Reservoir Temperature: 260°C ± 3°C
- Soldering Time: 3 seconds max.


## Hand Solder Parameters (Not Recommended)

- Soldering Iron Tip Temperature: 350°C ± 5°C
- Heating Time: 4-5 seconds max.

## Temperature Derating Curve

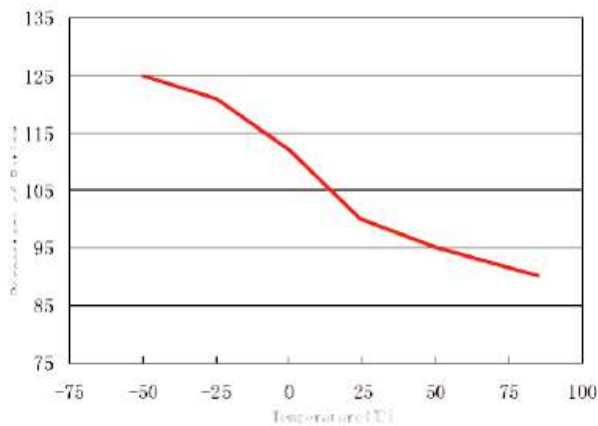

## Time-Current Curves

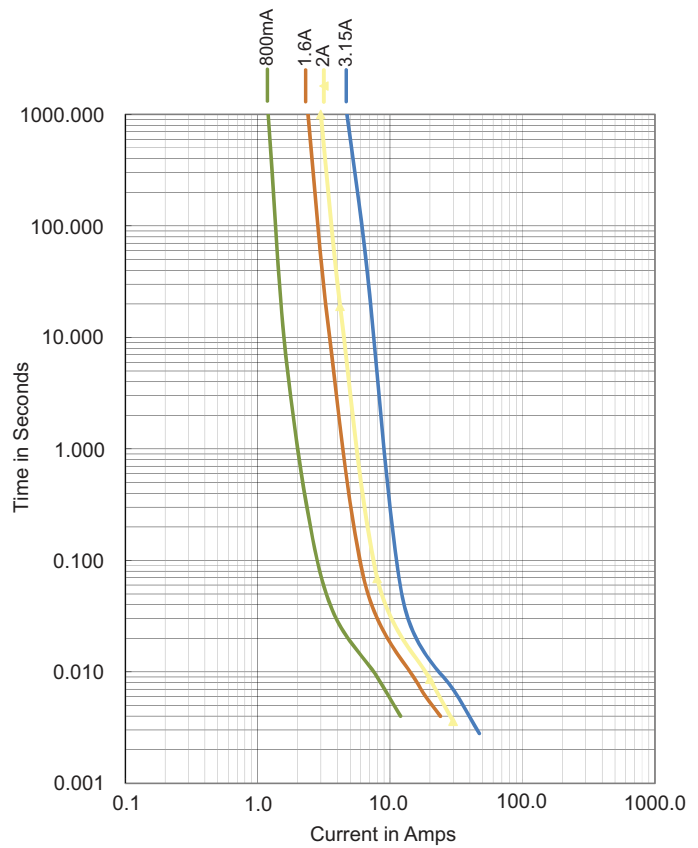

## Packaging Code

Packaging Code Suffix	Description
-TR1	1500 Fuses on a reel, five (5) reels in one (1) carton

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.