
	Ŧ	വ	н п	m		0
--	---	---	------------	---	--	---





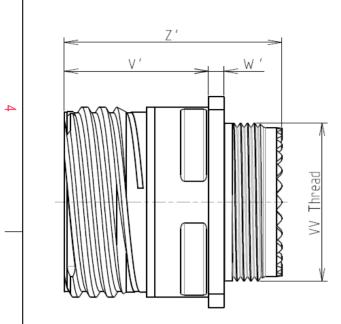

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL TYPE : Square Flange Receptacle

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite
	-Shell Plating	: Nickel
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souria	u contacts and Accessories
	-Temperature Range	65°C to +200°C
	-Salt Spray	: 2000 hours
	-Mass	: 10.4 g ± 10%

8D 0

11


М


01

Α


Ν

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M15x1-6g

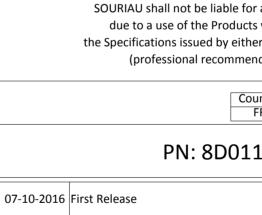

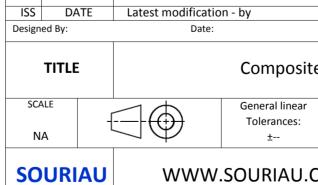

А

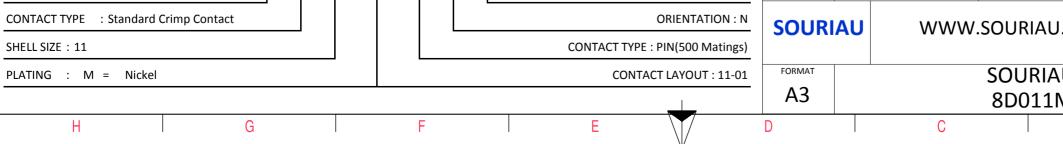

	ω		Þ			
Ŵ	P	0			4	
	· CE					
		Å				
	0	5				
)				
	9					
S EXA	AMPLE				3	
any non-conformity or damage which does not comply with						
er of the Parties or by a third party ndation, technical notice.)						
untry	try Jurisdiction & Control List					
FR		Not Listed			2	
1M	01AN					
		CHISTONAL		MOD N°		
	CUSTOMER DRAWING					
site	e Receptacle 8D series					
ar :			PROJECT			
This document is the property of					1	
it must not be reproduced or communicated without permission						
UDRG N° SHEET						
M0	1AN-C	I		1/2	J	
	В		А			

		G	ار (m		0
		Contact Layout				Panel Cutout
4		01			Å	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01]		- R	
ω	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
N						(professional recommendati Country FR PN: 8D011N
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
<u> </u>					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.Co SOURIAU 8D011M0
	Н	G	F	E	D	С

