




ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00397	Connector, 4C audio plug, 3.5xL20.7 mm, brass, nickel plated, molding style	1	
2	30-00179	Wire, 3C BC, 28 AWG, 300V, 80C, 3.8 mm, foil + shield, PVC	1	
3	24-00085	Overmold	1	PVC, black
4	Heat shrink	Heat shrink tube, black	1	covers end of jacket
5	Heat shrink	Heat shrink tube, black	1	covers shield

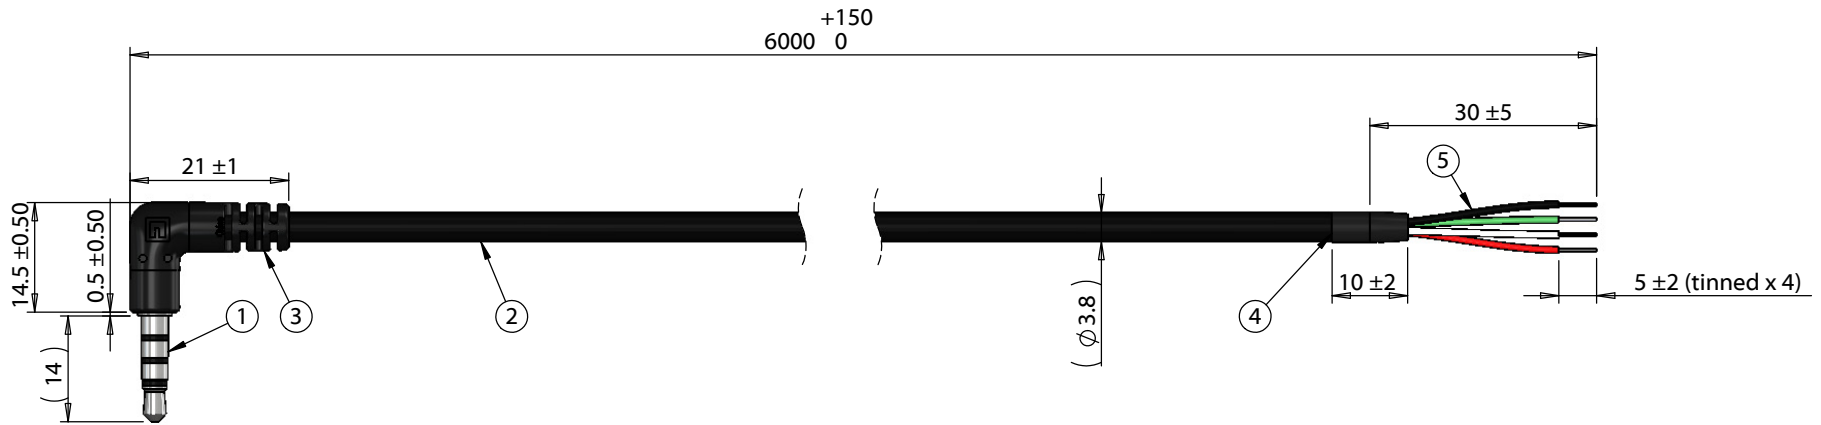

Wiring Diagram	
50-00397	wire color
A	red
B	white
C	green
D	shield

Notes:
Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	2/21/2019	Initial release	AW <small>Digitally signed by AW Date: 2019.02.21 11:51:56 -08'00'</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	
			GL <small>Digitally signed by GL Date: 2019.03.07 10:46:27 -08'00'</small>	Description:	Size: Part number:
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 6000 mm, 3.5 mm 4C 90° 50-00397 audio plug to 5 mm tinned, 28 AWG, 30-00179 wire	A 10-03222
					Scale: 1:1 Sheet 1 of 1

5

4

3

2

1