TE Internal #: 2198325-6

SFP, SFP+ & zSFP+, Cage Assembly with Integrated Connector,

Data Rate (Max) 32 Gb/s, Internal/External EMI Springs, SFP+


Thermally Enhanced


View on TE.com >




Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+ > zSFP+ Stacked Cage Assembly: EMI Spring



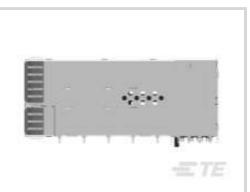

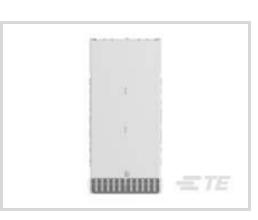

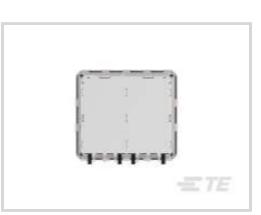



Pluggable I/O Product Type: Cage Assembly with Integrated Connector

Data Rate (Max): 32 Gb/s

EMI Containment Feature Type: Internal/External EMI Springs

Pluggable I/O Applications: SFP+ Thermally Enhanced

Lightpipe Options: With Lightpipe

All zSFP+ Stacked Cage Assembly: EMI Spring (45)

Features

Product Type Features

Form Factor	zSFP+ Stacked (SFP28)
Cage Type	Stacked
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Lightpipe Options	With Lightpipe
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Port Matrix Configuration	2 x 2
Lightpipe Configuration	Quad Triangular (Inner & Outer)
Lightpipe Style	Standard
Number of Ports	4
Number of Positions	80



Electrical Characteristics

Electrical Characteristics	
Data Rate (Max)	32 Gb/s
Contact Features	
Tail Plating Material	Tin
Contact Mating Area Plating Material Thickness	.76 μm[29.92 μin]
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel
Termination Features	
Termination Post & Tail Length	1.8 mm[.07 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Connector Mounting Type	Board Mount
Housing Features	
Cage Material	Nickel Silver Alloy
Centerline (Pitch)	.8 mm[.032 in]
Dimensions	
PCB Thickness (Recommended)	1.5 mm[.059 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Heat Sink Compatible	No
For Use With Pluggable I/O Products	zSFP+ SMT Connector
Pluggable I/O Applications	SFP+ Thermally Enhanced
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Tray
Other	
EMI Containment Feature Type	Internal/External EMI Springs

Product Compliance

For compliance documentation, visit the product page on TE.com>




EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

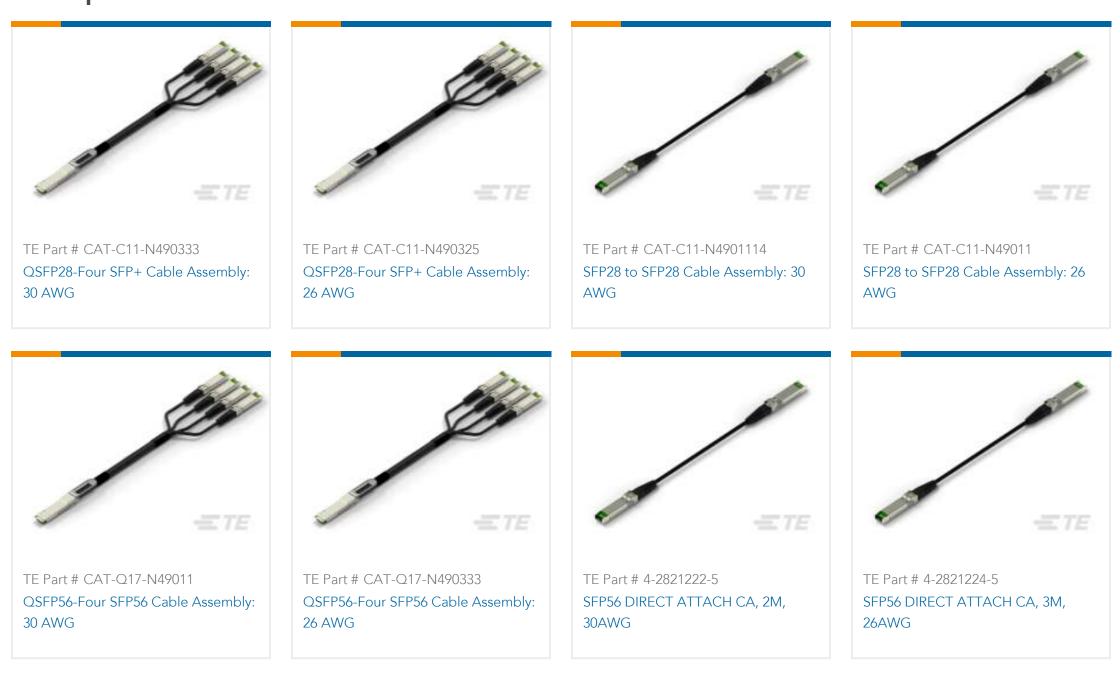





TE Part # 4-2334985-2 SFP56 DIRECT ATTACH CA, 1M, 32AWG




TE Part # 2334985-2 SFP28 DIRECT ATTACH CA, 1M, 32AWG



TE Part # 2215000-2 KIT, SEATING TOOL, zSFP+, 2X2

Customers Also Bought

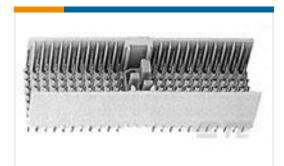

TE Part #5352332-1 2MM HM TYPE A MALE HDR 154 POS



TE Part #5767096-8 MICT,REC,038,ASY,.025,TAPE,CAP



TE Part #2065657-1 zd Plus, 4 pair, receptacle assy



= TE

TE Part #6339488-1 VERTICAL BATTERY CONNECTOR **ASSY**



TE Part #2174507-2 MICRO USB, TYPE B



TE Part #3-6318490-6



TE Part #2127933-6



TE Part #2309408-3

TE Part #2-2355933-6 HPI 2.0P VERTICAL HEADER 6POS TE Part #1399046-1 MOTOR, SERVO NEMA 34 MEP

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2198325-6_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2198325-6_B.3d_igs.zip

English



Customer View Model

ENG_CVM_CVM_2198325-6_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

zSFP+ Interconnect Brochure

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English