



DIMENSIONS mm (inches)

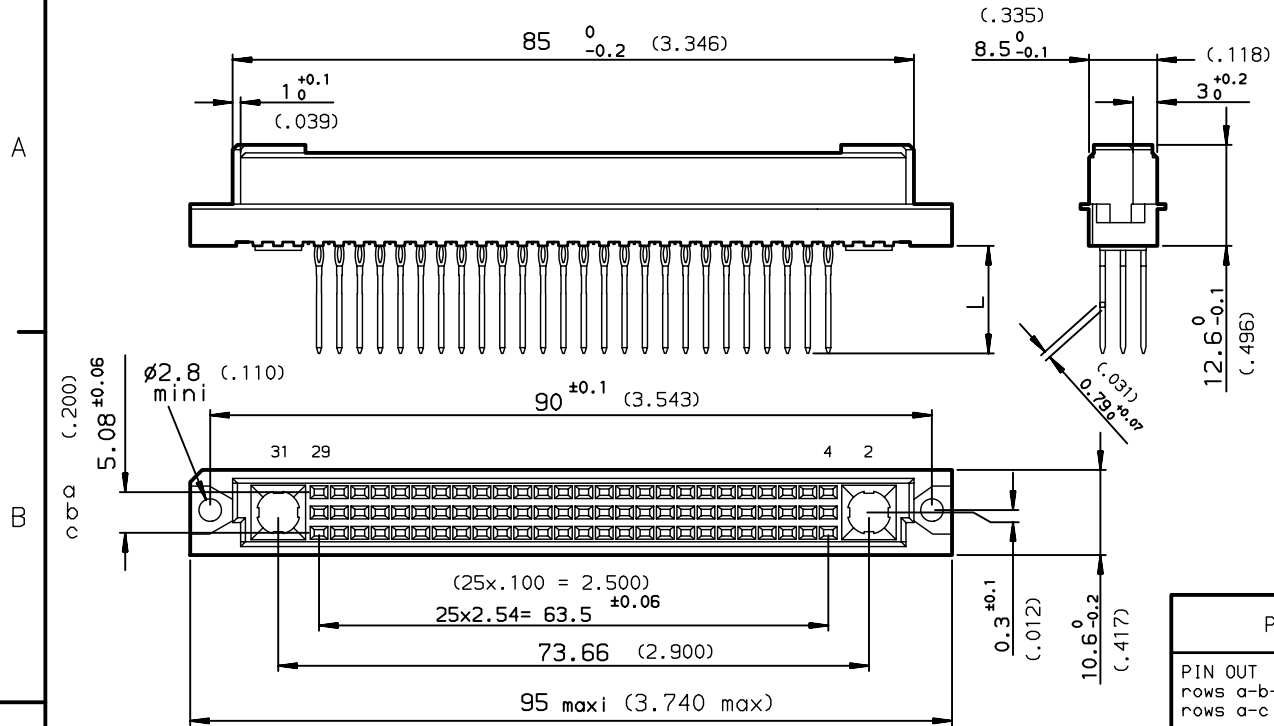


METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PART NUMBER	8609		B1		7	5	
PIN OUT							
rows a-b-c				3	78		
rows a-c				4	52		
NUMBER OF CONTACTS							
TERMINATION							
L = 13.10 ±0.20 (.515)			1 wrap				91
L = 17.10 ±0.20 (.673)			2 wraps				92
L = 3.00 ±0.20 (.118)			short post				94
PERFORMANCE CLASS							
DIN 41612 class 3							4
DIN 41612 class 2							5
DIN 41612 class 1							6
TERMINATION TYPE							
TIN LEAD							000E3
LEAD FREE							E3LF

PCB DRILLING
component side

PERFORMANCES AS PER DIN 41612

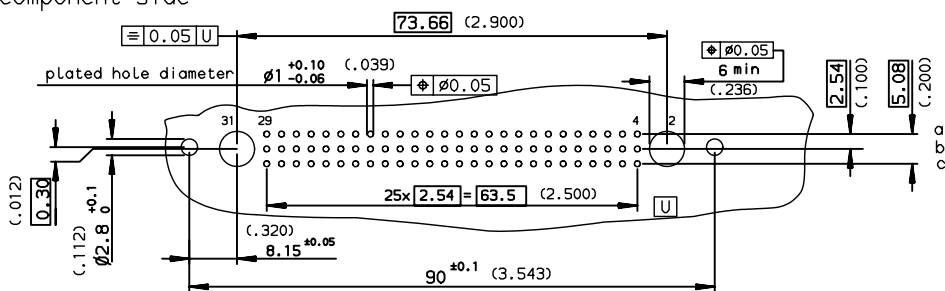

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm	size A3	Scale 1.5
TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	ROUILLARD	1997/01/27	ANGULAR	0.X	±0.1	ECN
Eng	TARON	1997/01/27	LINEAR	0.XX	±0.1	LS06-0095
Chr	LEGARE	1997/01/27	0.XX' ±2'	0.XXX	±0.1	
Appr	LEGARE	1997/01/27	Product family	DIN 8609		Spec ref -
FCI		title STRAIGHT FEMALE - STYLE M			Rev. D	
catalog no		-			C-8609-0555	
customer		-			sheet 1 of 1	

rev	ecn no	dr	date
B	-	ROU	1997/11/05
C	LS05-004	JTA	2005/02/28
D	LS06-0095	LGO	2006/07/12
-	-	-	-
-	-	-	-
-	-	-	-