


# Steward

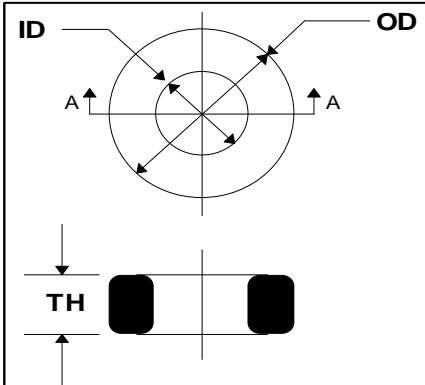

## CORE DIMENSIONS

UNCOATED CORE					35T0231-000				
	MM	INCHES		MM	INCHES				
OD	5.84	(.230)	±	.15	(.006)				
ID	3.05	(.120)	±	.13	(.005)				
TH	1.52	(.060)	±	.13	(.005)				
SINGLE PARYLENE COATING					35T0231-00P				
OD	5.87	(.231)	±	.15	(.006)				
ID	3.02	(.119)	±	.13	(.005)				
TH	1.55	(.061)	±	.13	(.005)				

WEIGHT / K 0.32 LBS  
 INITIAL PERMEABILITY 5000

## ELECTRICAL SPECIFICATION

	MIN (μH)	NOM MIN TOL.	NOM (μH)	MAX MAX TOL.	FREQ. (kHz)	VOLT. (V)	URNS
L	.793	(-20%)	.991	1.190 (+20%)	100	≤ .00046	1
Q	10	-	-	-	100	≤ .00046	1

## COATING SPECIFICATIONS

TYPE	Max. Coating (mils.)	Min. DLB VAC	TEST FORCE (LB)
PARYLENE	0.5	1000	0.30

NOTES:



Rev	Description	Date	INT
A	Original Draft	7/11/1995	JBE
B	REVISE PRINT	7/11/1995	JBE
C	UPDATE PRINT FORMAT	7/11/1995	JBE
D	TRANSFER TO LOTUS NOTES	11/19/1997	IS
E	RE-ACTIVATE PRINT REMOVE Q SPECS CHANGE PART NUMBER	10/5/2005	JRK
F	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 35T0231-00P-F	Rev:
Drawn By: WMM	Title # 35T0231-00P	F

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

**UNCONTROLLED DOCUMENT**