
т	۵	н т	m	0





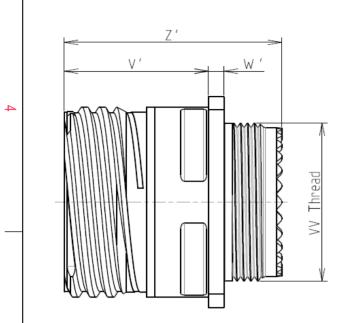

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		

: 2000 hours

8D 0

G

11

J

01

J

F

D


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
VV THREAD	M15x1-6g


ORIENTATION : D

CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET (1500 Matings)

Е



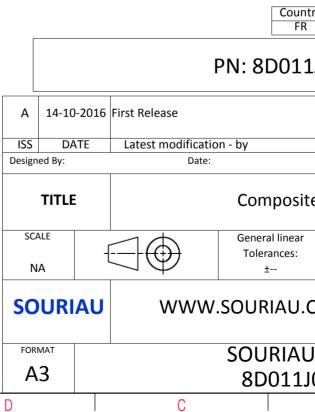

Φ	>	•			
			4		
AS EXAMPLE			3		
any non-conformi which does not co or of the Parties or I adation, technical n	omply with by a third party otice.)				
untry Jurisc FR	diction & Control List Not Listed		2		
L1J01JD					
		MOD N°			
	CUSTOMER DRAWING				
ite Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°		SHEET			
LJO1JD-C B	A		J		
_					

		۵	ار (m		0
		Contact Layout				Panel Cutout
4		01			٨	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01]		**************************************	
ω	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
22						(professional recommendati Country FR PN: 8D011J
					A 14-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011J0
	Н	G	F	E	D	C

