



### 2.4 GHz 802.11b/g OPERATION

The Laird Technologies Q-Bridge™ is a high performance wireless Ethernet bridge system which creates a transparent wireless bridge between two networks. The bridge is transparent in that the LAN's appear to be connected together as though through a hard wired Ethernet connection. The bridge supports multiple MAC addresses and DHCP.

The Q-Bridge™ comes fully configured as a bridge pair for true plug and play operation. No initial setup is necessary to create a working bridge connection between two Wireless or Wired LANs. WPA2 (AES) security is configured and enabled for secure plug and play operation without the need for complicated setups. Full local or wireless remote configuration management is available thru an HTML Web Interface in order for the authorized user to be able to change passwords, encryption keys, output power, IP Address or various other settings. The units can also be reconfigured as a high performance access point or client bridge.

The bridge system includes everything that is needed to connect two wired or wireless LAN's over a distance from 0 to 4 miles. Included in the Q-Bridge™ kit are (QTY 2) 802.11b/g Q-Bridge Antennas with field replaceable weatherproof ethernet connectors, (QTY 2) QwikClamp™ Universal Wall/Pole Mount Systems, (QTY 2) 75' Outdoor Rated CAT5e shielded cables and (QTY 2) POE power supplies. The system also includes the CAT5e cables to connect the POE adapter to a computer (crossover cable) or to a hub, switch or router (straight thru cable).

### FEATURES

- Plug and Play – No complicated setup required
- 0 to 4 mile Line of Sight Range
- 15 Mb/Sec Real World Throughput (< ¼ Mile)
- WPA2 Encryption for best available security
- Transparent Ethernet Bridge – Multiple MAC Support
- Universal QwikClamp™ Mount System for Wall or Pole
- Remote Management and Update Capable

### APPLICATIONS

- XBOX and other Network Gaming
- Internet Access Sharing
- Connect Multiple Buildings
- Remote Video and Media Servers
- Extend your Wireless or Wired LAN
- Remote video surveillance
- WiMAX




### global solutions: local support.™

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12  
IAS-EUSales@lairdtech.com


Asia: +1.65.6.243.8022  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

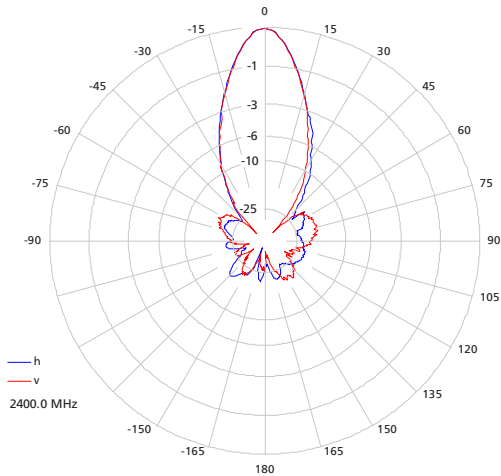

**Antenna Pattern**

**Q-Bridge+ Typical Thruput vs Distance**  
Line of Site = No Obstructions Between Antennas

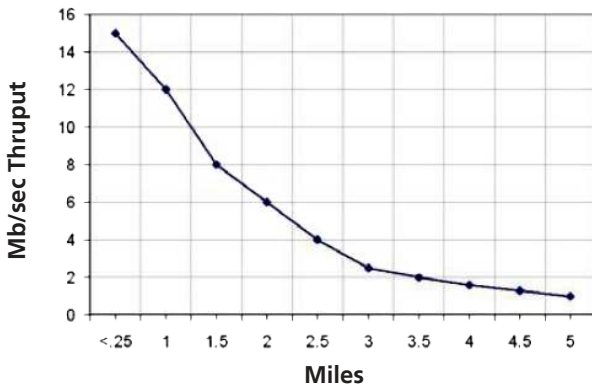

**General Specifications**

Standards	802.11b/g (Wlan), 802.3(LAN)
Modulation	802.11b DSSS (DPBPSK, DQPSK, CCK,) 802.11g OFDM (64QAM,16QAM,QPSK,BPSK)
Certifications	FCC / CE
<b>Radio Specifications</b>	
Operating Frequency	2400 to 2497 MHz
Channels	USA/Canada 11, Japan 14, Europe 13
RF Output Power (software selectable)	250 mW Max 802.11b 100 mW Max 802.11g
Maximum EIRP	+38 dBm
Receive Sensitivity @ 11Mbps	-84 dBm
Security	64/128bit WEP, WPA (TKIP/AES), WPA2
Remote Config (Web Based)	By IP Address; thru Wireless or Ethernet
Operating Power	60 mA

**Antenna Specifications**

Antenna Gain	15 dBi
Antenna Beamwidth (V & H)	30 deg
Antenna Front to Back	>21 dB
Polarization	Horizontal or Vertical

**POE Specification**

Power Over Ethernet Injector (CE Approved)	INPUT: 90 – 264 VAC @ 47 – 63 Hz OUTPUT: 48 VDC @ .35 A
--	--

**Mechanical Specifications**

Color	White
Dimensions (L x W x H)	10.75 x 10.75 x 2.6 in (267 x 267 x 67 mm)
Weight	15 lb (6.8 kg) Shipping Weight
Ethernet Connector	Field Replaceable Waterproof RJ45
Cable (75' long)	CAT5E Outdoor Rated Shielded Cable
Mount	Wall or Pole Mount

**Environmental Specifications**

Operating Temperature	-30 to 158°F (-34 to 70°C)
Humidity	0 to 100% RH
Wind Loading (125 MPH survivability)	100 MPH / 28 lbs; 125 MPH / 43 lbs

**SYSTEM ORDERING**

Q-Bridge+ 2.4 GHz 0-4 Mile 15 Mb/sec Wireless Ethernet Bridge System

**NOTES**

- All shipments F.O.B. Schaumburg, IL 60173

ANT-DS-Q-BRIDGE 0611

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2011 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.