

REV. 0


DCO 144086

| | |
|-----------------|---------------|
| COIL: @ 25°C | |
| RESISTANCE | 675 OHMS ±10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 13.5 VDC |
| MUST RELEASE | 1.47 VDC |

| | |
|--------------|---------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 Hz TO 2000 Hz @ 20 g's |
| SHOCK | 100 g's 6 ±1 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |

NOTES: OPERATE & RELEASE 5 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

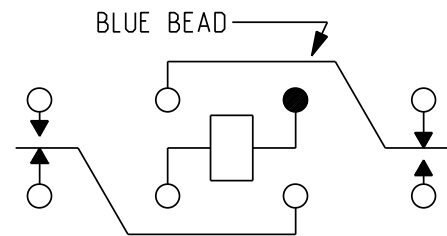

CONTACT RATING: 3 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. B.D. 23AUG2005 CK. JMB 8/23/05

CII Technologies
advanced control electronic solutions

CUST. CII STD.
CUST. NO. REV.

"FW" RELAY

FW 1205G00