


[13.79] 0.543	
0.010	
	[13.79] 0.543

RoHS Compliant	DIMENSIONS ARE IN INCHES [MILLIMETERS]		NAME	DATE	
	TOLERANCES: FRACTIONAL±	DRAWN	TNC	10/12/2012	
ANGLE (+) + - +	ANGULAR: MACH± 3 Degrees	CHECKED			
	TWO PLACE DECIMAL ± .015 [.381] THREE PLACE DECIMAL ± .010 [.254]	ENG APPR.			
DO NOT SCALE DRAWING	DRAWING MATERIAL:	MFG APPR.			
PROPRIETARY AND CONFIDENTIAL	.0035" [.089] BeCu ALLOY 25, 1/2 HARD	Q.A.			ENGINEERED SOLUTIONS
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF	FINISH:	COMMENTS			_
ORBEL CORPORATION, ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF					SIZE DWG NO. A 21B03-BFA000543N 01
ORBEL CORPORATION IS PROHIBITED.	WEIGHT: 0.005oz. [0.137g]				SCALE: 5:1 CAGE CODE: 57DU2 SHEET 1 OF 1

HOW TO ORDER FINGER-STOCK GASKETS

The chart below is an easy-to-use reference on how Orbel finger-stock gasket part numbers are created and used to order standard and custom gaskets. Custom configurations that fall outside of our standard gasket styles are also available.

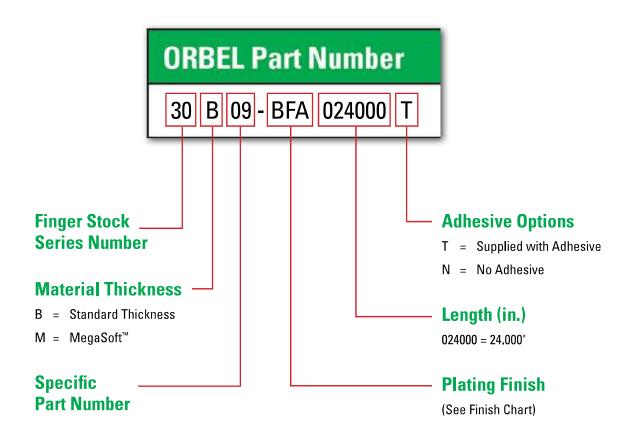

Sample Part Number: 30B09-BFA024000T

PLATING FINISHES							
Finish Type	Finish Code	Finish Type	Finish Code				
SILVER	AGA	NICKEL, ELECTROLESS	NIP				
GOLD .000050" MIN	AUA	TIN/LEAD 90/10, MATTE	РВА				
GOLD .000050" MIN with NICKEL FLASH UNDERPLATE	AUK	TIN/LEAD 60/40, MATTE	PBB				
BRIGHT FINISH, UNPLATED	BFA	TIN/LEAD 90/10, BRIGHT	PBC				
BRIGHT FINISH, SOLDERABLE	BFS	TIN/LEAD 60/40, BRIGHT	PBD				
CADMIUM + CLEAR CHROMATE	CDA	TIN, BRIGHT	SNA				
CADMIUM + YELLOW CHROMATE	CDB	TIN, MATTE	SNB				
NICKEL, BRIGHT	NIA	ZINC + CLEAR CHROMATE	ZNA				
NICKEL, MATTE OR SULFAMATE NICKEL	NIB	ZINC + YELLOW CHROMATE	ZNB				

All plating thicknesses are .0001" min. except where noted.