
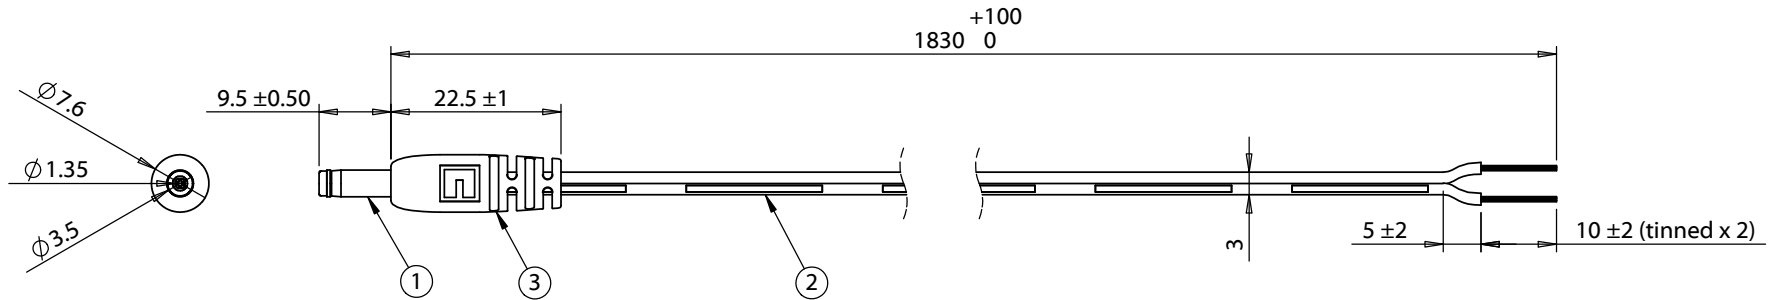


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00315	Connector, dc plug, 3.5x1.35xL20mm, brass, nickel plated, molding type, white insulators	1	
2	30-00405	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A, white	1	
3	24-00002	Overmold, PVC, white	1	



**Notes:**  
 Cables individually tied and bundled in groups of 10  
 Functionally equivalent components may be substituted  
 4 A, 12 Vdc

Wiring Diagram	
50-00315	wire color
center	white with stripe
sleeve	white

Revision:	Date:	Description:	Prepared: GL 2016.05.18 15:31:01 -07'00'	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>		
A	10/31/2014	Initial release	Verified: LA Digitally signed by LA DN: cn=LA, o=Tensility, ou=Engineering, email=LA@TENSILITY.COM, c=US Date: 2016.05.18 15:30:51 -0700				
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 3.5x1.35x9.5 mm 50-00315 dc plug to stripped tinned, 24 AWG, 30-00405 wire, white	Size: A	Part number: 10-01249	
					Scale: 1:2		Sheet 1 of 1

5

↑

4

3

2

1