
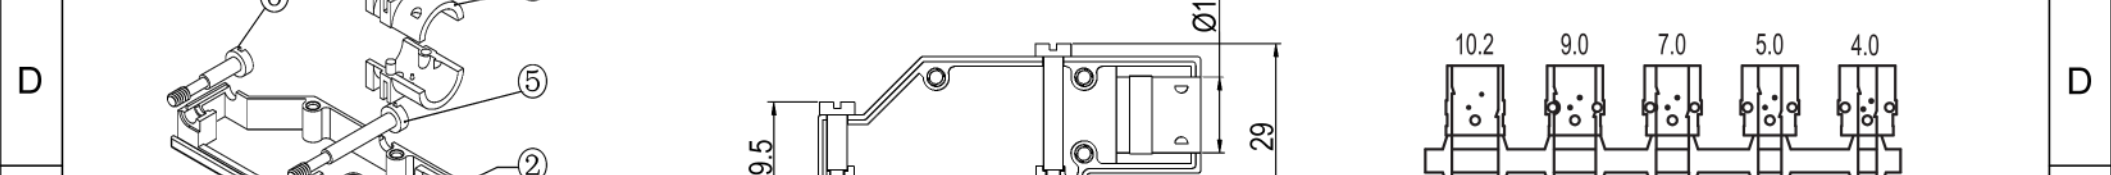
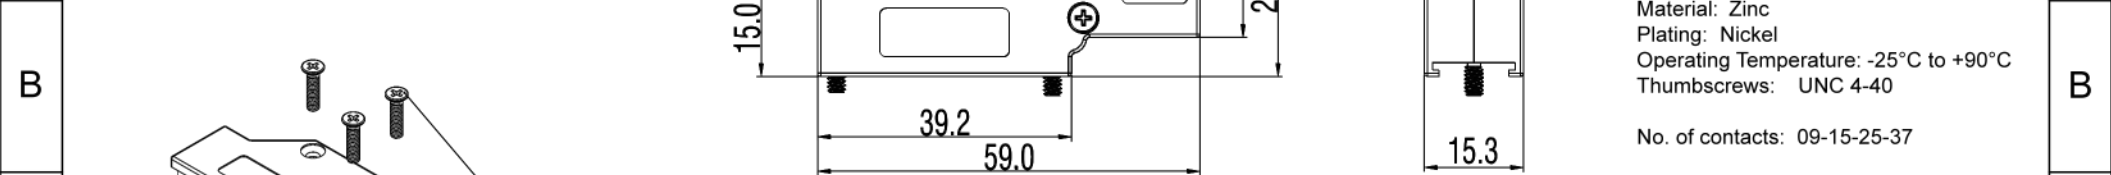


	1	2	3	4	5	6	7																																																																																			
A							TECHNICAL SPECIFICATIONS Material: Zinc Plating: Nickel Operating Temperature: -25°C to +90°C Thumbscrews: UNC 4-40 No. of contacts: 09-15-25-37		A																																																																																	
B									B																																																																																	
C									C																																																																																	
D							Grommet Set		D																																																																																	
E	<table border="1"> <thead> <tr> <th>Item</th> <th>QTY</th> <th>Part description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> <td>Upper Cover</td> </tr> <tr> <td>2</td> <td>1</td> <td>Lower Cover</td> </tr> <tr> <td>3</td> <td>3</td> <td>CSK M2.5x11.5 Screw</td> </tr> <tr> <td>4</td> <td>1</td> <td>Grommet Set</td> </tr> <tr> <td>5</td> <td>1</td> <td>Jackscrew UNC4-40x28.5</td> </tr> <tr> <td>6</td> <td>1</td> <td>Jackscrew UNC4-40x19.5</td> </tr> </tbody> </table>		Item	QTY	Part description	1	1	Upper Cover	2	1	Lower Cover	3	3	CSK M2.5x11.5 Screw	4	1	Grommet Set	5	1	Jackscrew UNC4-40x28.5	6	1	Jackscrew UNC4-40x19.5							E																																																												
Item	QTY	Part description																																																																																								
1	1	Upper Cover																																																																																								
2	1	Lower Cover																																																																																								
3	3	CSK M2.5x11.5 Screw																																																																																								
4	1	Grommet Set																																																																																								
5	1	Jackscrew UNC4-40x28.5																																																																																								
6	1	Jackscrew UNC4-40x19.5																																																																																								
F									F																																																																																	
G	RoHS compliant Unit: mm		<table border="1"> <thead> <tr> <th>Scale</th> <th>Free</th> <th></th> <th></th> <th></th> <th></th> <th>Date</th> <th>Name</th> <th>Customer-No.</th> </tr> </thead> <tbody> <tr> <td colspan="2">TOLERANCE</td> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td>17.08.2017</td> <td>S.Bölling</td> </tr> <tr> <td>0~6</td> <td>±0.10</td> <td></td> <td></td> <td></td> <td></td> <td>Approved</td> <td>17.08.2017</td> <td>S.Bölling</td> </tr> <tr> <td>6~30</td> <td>±0.20</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>ASSMANN WSW-No. ACOV-SUB-09MB39</td> </tr> <tr> <td>30~120</td> <td>±0.30</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Drawing-No.</td> </tr> <tr> <td>120~400</td> <td>±0.50</td> <td>①</td> <td>add assembly instruction</td> <td>08.04.2020</td> <td>S.Bölling</td> <td colspan="2" rowspan="3"> </td> <td>ASS_5280_CO</td> </tr> <tr> <td>DIM</td> <td>Tol</td> <td>②</td> <td>Drawn</td> <td>17.08.2017</td> <td>S.Bölling</td> <td>rev01</td> </tr> <tr> <td>Angle</td> <td>±1°</td> <td></td> <td></td> <td></td> <td></td> <td>Replace</td> </tr> <tr> <td>Angle</td> <td>Tol</td> <td>Id.</td> <td>Modification</td> <td>Date</td> <td>Name</td> <td></td> <td></td> <td>Sheet 1/5</td> </tr> </tbody> </table>		Scale	Free					Date	Name	Customer-No.	TOLERANCE						Drawn	17.08.2017	S.Bölling	0~6	±0.10					Approved	17.08.2017	S.Bölling	6~30	±0.20							ASSMANN WSW-No. ACOV-SUB-09MB39	30~120	±0.30							Drawing-No.	120~400	±0.50	①	add assembly instruction	08.04.2020	S.Bölling			ASS_5280_CO	DIM	Tol	②	Drawn	17.08.2017	S.Bölling	rev01	Angle	±1°					Replace	Angle	Tol	Id.	Modification	Date	Name			Sheet 1/5									G
Scale	Free					Date	Name	Customer-No.																																																																																		
TOLERANCE						Drawn	17.08.2017	S.Bölling																																																																																		
0~6	±0.10					Approved	17.08.2017	S.Bölling																																																																																		
6~30	±0.20							ASSMANN WSW-No. ACOV-SUB-09MB39																																																																																		
30~120	±0.30							Drawing-No.																																																																																		
120~400	±0.50	①	add assembly instruction	08.04.2020	S.Bölling			ASS_5280_CO																																																																																		
DIM	Tol	②	Drawn	17.08.2017	S.Bölling			rev01																																																																																		
Angle	±1°							Replace																																																																																		
Angle	Tol	Id.	Modification	Date	Name			Sheet 1/5																																																																																		
H									H																																																																																	
	1	2	3	4	5	6	7	SV4382																																																																																		

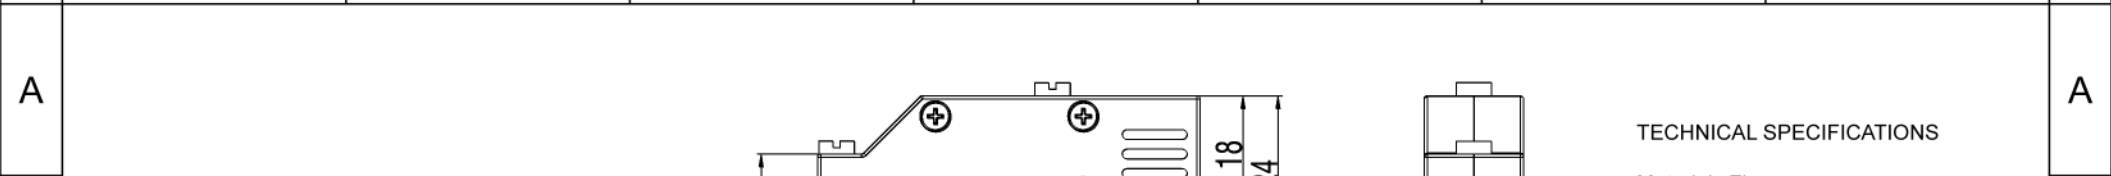

TECHNICAL SPECIFICATIONS

Material: Zinc
 Plating: Nickel
 Operating Temperature: -25°C to +90°C
 Thumbscrews: UNC 4-40
 No. of contacts: 09-15-25-37

Item	QTY	Part description
1	1	Upper Cover
2	1	Lower Cover
3	3	CSK M2.5x11.5 Screw
4	1	Grommet Set
5	1	Jackscrew UNC4-40x28.5
6	1	Jackscrew UNC4-40x19.5

RoHS compliant
 Unit: mm

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	17.08.2017	S.Bölling
0~6	±0.10				Approved	17.08.2017	S.Bölling
6~30	±0.20						
30~120	±0.30						
120~400	±0.50	①	add assembly instruction	08.04.2020	S.Bölling		
DIM	Tol	②	Drawn	17.08.2017	S.Bölling		
Angle	±1°						
Angle	Tol	Id.	Modification	Date	Name		

Grommet Set




ASSMANN WSW-No.
ACOV-SUB-15MB39




Drawing-No.
ASS_5280_CO rev01

Replace
 Sheet 2/5

	1	2	3	4	5	6	7																																																																																		
A							TECHNICAL SPECIFICATIONS Material: Zinc Plating: Nickel Operating Temperature: -25°C to +90°C Thumbscrews: UNC 4-40 No. of contacts: 09-15-25-37																																																																																		
B																																																																																									
C																																																																																									
D							Grommet Set																																																																																		
E																																																																																									
F	<table border="1"> <thead> <tr> <th>Item</th> <th>QTY</th> <th>Part description</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> <td>Upper Cover</td> </tr> <tr> <td>2</td> <td>1</td> <td>Lower Cover</td> </tr> <tr> <td>3</td> <td>3</td> <td>CSK M3x12 Screw</td> </tr> <tr> <td>4</td> <td>1</td> <td>Grommet Set</td> </tr> <tr> <td>5</td> <td>1</td> <td>Jackscrew UNC4-40x39.5</td> </tr> <tr> <td>6</td> <td>1</td> <td>Jackscrew UNC4-40x28.5</td> </tr> </tbody> </table>		Item	QTY	Part description	1	1	Upper Cover	2	1	Lower Cover	3	3	CSK M3x12 Screw	4	1	Grommet Set	5	1	Jackscrew UNC4-40x39.5	6	1	Jackscrew UNC4-40x28.5																																																																		
Item	QTY	Part description																																																																																							
1	1	Upper Cover																																																																																							
2	1	Lower Cover																																																																																							
3	3	CSK M3x12 Screw																																																																																							
4	1	Grommet Set																																																																																							
5	1	Jackscrew UNC4-40x39.5																																																																																							
6	1	Jackscrew UNC4-40x28.5																																																																																							
G	RoHS compliant Unit: mm		<table border="1"> <thead> <tr> <th>Scale</th> <th>Free</th> <th></th> <th></th> <th></th> <th></th> <th>Date</th> <th>Name</th> <th>Customer-No.</th> </tr> </thead> <tbody> <tr> <td colspan="2">TOLERANCE</td> <td></td> <td></td> <td></td> <td></td> <td>Drawn</td> <td>17.08.2017</td> <td>S.Bölling</td> </tr> <tr> <td>0~6</td> <td>±0.10</td> <td></td> <td></td> <td></td> <td></td> <td>Approved</td> <td>17.08.2017</td> <td>S.Bölling</td> </tr> <tr> <td>6~30</td> <td>±0.20</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>ASSMANN WSW-No. ACOV-SUB-25MB39</td> </tr> <tr> <td>30~120</td> <td>±0.30</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Drawing-No.</td> </tr> <tr> <td>120~400</td> <td>±0.50</td> <td>①</td> <td>add assembly instruction</td> <td>08.04.2020</td> <td>S.Bölling</td> <td colspan="2" rowspan="3"> </td> <td>ASS_5280_CO</td> </tr> <tr> <td>DIM</td> <td>Tol</td> <td>②</td> <td>Drawn</td> <td>17.08.2017</td> <td>S.Bölling</td> <td>rev01</td> </tr> <tr> <td>Angle</td> <td>±1°</td> <td></td> <td></td> <td></td> <td></td> <td>Replace</td> </tr> <tr> <td>Angle</td> <td>Tol</td> <td>Id.</td> <td>Modification</td> <td>Date</td> <td>Name</td> <td></td> <td></td> <td>Sheet 3/5</td> </tr> </tbody> </table>		Scale	Free					Date	Name	Customer-No.	TOLERANCE						Drawn	17.08.2017	S.Bölling	0~6	±0.10					Approved	17.08.2017	S.Bölling	6~30	±0.20							ASSMANN WSW-No. ACOV-SUB-25MB39	30~120	±0.30							Drawing-No.	120~400	±0.50	①	add assembly instruction	08.04.2020	S.Bölling			ASS_5280_CO	DIM	Tol	②	Drawn	17.08.2017	S.Bölling	rev01	Angle	±1°					Replace	Angle	Tol	Id.	Modification	Date	Name			Sheet 3/5								
Scale	Free					Date	Name	Customer-No.																																																																																	
TOLERANCE						Drawn	17.08.2017	S.Bölling																																																																																	
0~6	±0.10					Approved	17.08.2017	S.Bölling																																																																																	
6~30	±0.20							ASSMANN WSW-No. ACOV-SUB-25MB39																																																																																	
30~120	±0.30							Drawing-No.																																																																																	
120~400	±0.50	①	add assembly instruction	08.04.2020	S.Bölling			ASS_5280_CO																																																																																	
DIM	Tol	②	Drawn	17.08.2017	S.Bölling			rev01																																																																																	
Angle	±1°							Replace																																																																																	
Angle	Tol	Id.	Modification	Date	Name			Sheet 3/5																																																																																	
H																																																																																									
	1	2	3	4	5	6	7	SV4382																																																																																	

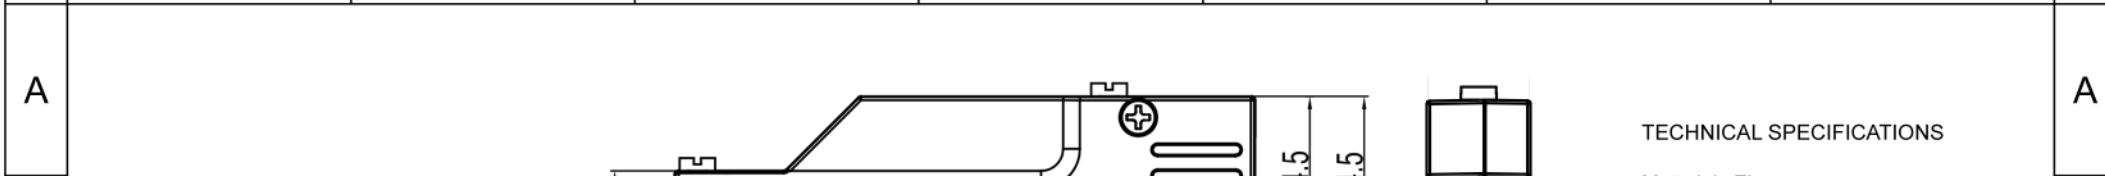


TECHNICAL SPECIFICATIONS
 Material: Zinc
 Plating: Nickel
 Operating Temperature: -25°C to +90°C
 Thumbscrews: UNC 4-40
 No. of contacts: 09-15-25-37

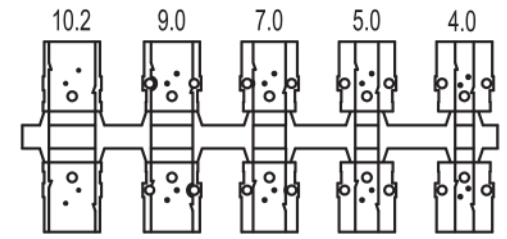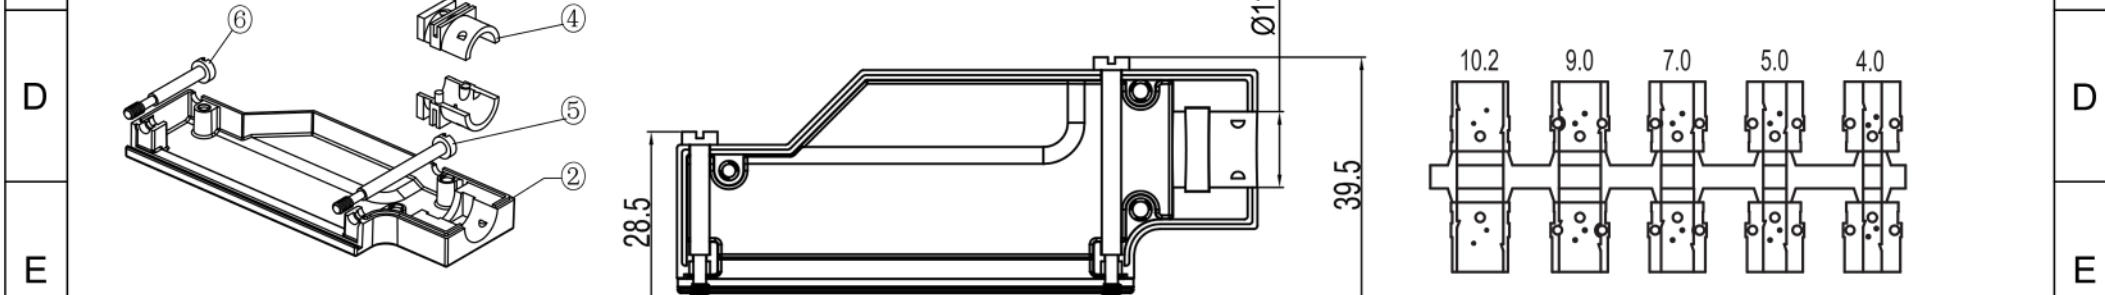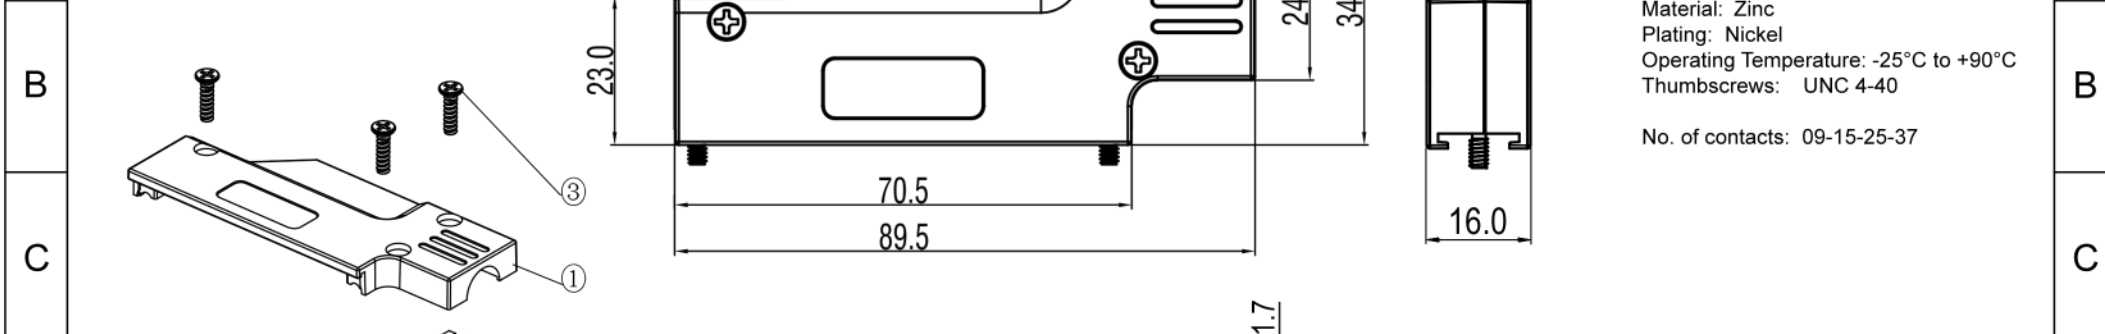


Grommet Set

Item	QTY	Part description
1	1	Upper Cover
2	1	Lower Cover
3	3	CSK M3x12 Screw
4	1	Grommet Set
5	1	Jackscrew UNC4-40x39.5
6	1	Jackscrew UNC4-40x28.5


G	RoHS compliant Unit: mm		Scale	Free				Date	Name	Customer-No.
			TOLERANCE					Drawn	17.08.2017	S.Bölling
			0~6	±0.10				Approved	17.08.2017	S.Bölling
			6~30	±0.20						
H			30~120	±0.30						ASSMANN WSW-No. ACOV-SUB-37MB39
			120~400	±0.50	①	add assembly instruction	08.04.2020	S.Bölling	Drawing-No. ASS_5280_CO rev01	
			DIM	Tol	②	Drawn	17.08.2017	S.Bölling	Replace Sheet 4/5	
			Angle	±1°						
		Angle	Tol	Id.	Modification	Date	Name			

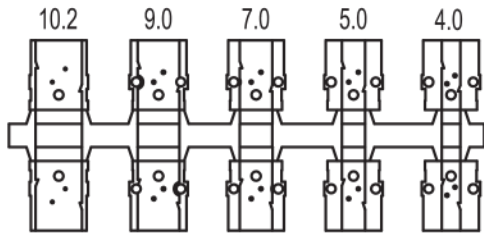


Select the ferrule halves that closest match the outer diameter of your cable - including the outer jacket. You can mix 2 different sizes to obtain the best fit. It is also possible to use only 1 half if necessary. Largest size 10,2mm is however not mixable with the others due to special design.

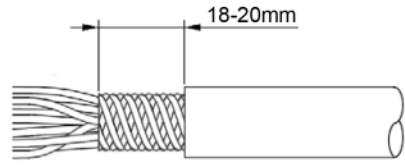


Prepare the cable by stripping approx. 18-20mm and shape the braid into two pigtails.

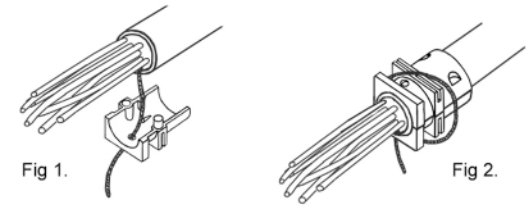


If Foiled cable is being used, Insert the drain wire into the small hole in one of the ferrule halves. (Fig. 1) Assemble the two halves as shown in Fig. 2 and loop the drain wire - preferably into a knot.

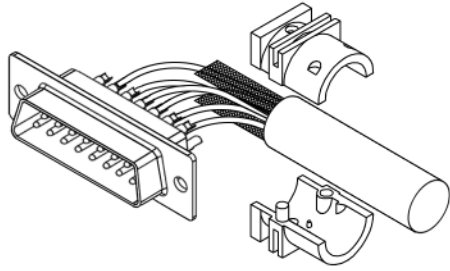

For standard braided cable - place the two ferrule halves around the cable as shown. Pigtail the braid and place it both under and over the ferrule halves.

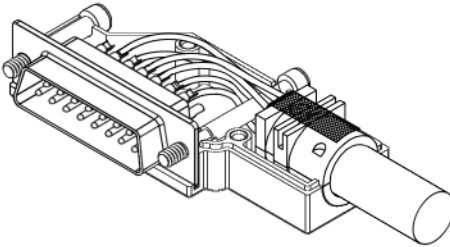

Place the assembly inside the hood. Fit the longer Jackscrew in between the wires if needed.

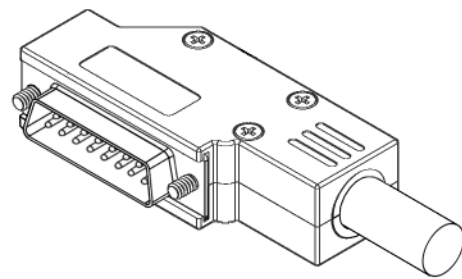

Complete the assembly by putting top half and screw together with accompanied screw set. Recommended maximum torque is 150-200 Ncm.

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	17.08.2017	S.Bölling
0~6	±0.10					Approved	17.08.2017	S.Bölling
6~30	±0.20							
30~120	±0.30							
120~400	±0.50	①	add assembly instruction	08.04.2020	S.Bölling			
DIM	Tol	②	Drawn	17.08.2017	S.Bölling			
Angle	±1°							
Angle	Tol	Id.	Modification	Date	Name			

Drawing-No.		ASS_5280_CO	rev01
Customer-No.		ASSMANN WSW-No. ACOV-SUB-XXMB39 - ASSEMBLY	
Replace		Sheet 5/5	